


MC1035
MC1235


Three differential amplifiers with emitter-follower outputs and a bias driver. This device is designed for use as a dual Schmitt trigger or a level translator, as well as for many linear applications.

POSITIVE LOGIC

DUAL SCHMITT TRIGGER



TRIPLE DIFFERENTIAL AMPLIFIER



TRUTH TABLE

Inputs		Outputs	
3	4	1	2
5		6	8
10		11	13
H	V _{BB}	L	H
L	V _{BB}	H	L
V _{BB}	H	H	M
V _{BB}	L	L	L

□ OR ■ NOR


DC Input Loading Factor = 1

DC Output Loading Factor = 25

Power Dissipation = 140 mW typical

The output polarities shown in the logic diagrams above are true only when V_{BB} is applied on Pins 4, 6 and 11.

CIRCUIT SCHEMATIC

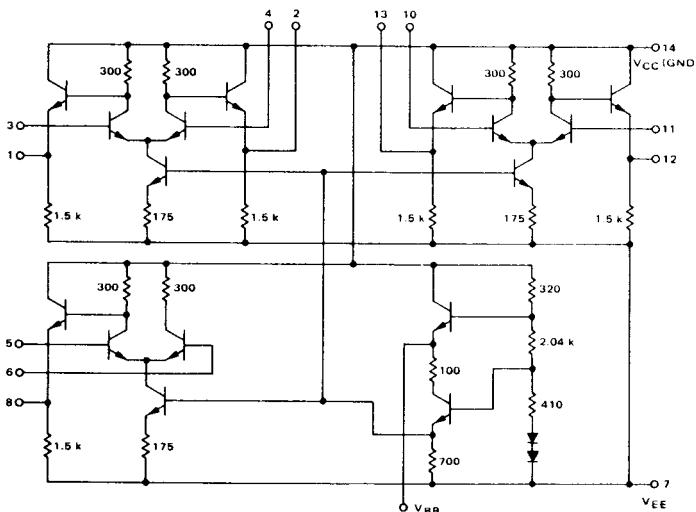


Resistor values are nominal.

MC1035, MC1235 (continued)

ELECTRICAL CHARACTERISTICS


The output polarity shown in the logic diagram at the right is true only when V_{BB} is applied on pins 4, 6, and 11.



Characteristic	Symbol	Pin Under Test	MC1235 Test Limits						MC1035 Test Limits						Unit	
			-55°C		+25°C		+125°C		0°C		+25°C		+75°C			
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
Power Supply Drain Current	I_E	7	-	-	-	53	-	-	mADC	-	-	33	-	-	mADC	
Input Current	I_{in}	3 4 5 6 10 11	-	-	-	100	-	-	μ ADC	-	-	100	-	-	μ ADC	
Input Leakage Current	I_R	3 4 5 6 10 11	-	-	-	0.2	-	1.0	μ ADC	-	-	0.2	-	1.0	μ ADC	
"NOR" Logical "1" Output Voltage	V_{OH}^{\dagger}	8 13	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	VDC	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	VDC
"NOR" Logical "0" Output Voltage	V_{OL}	1 8 13	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	VDC	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	VDC
"OR" Logical "1" Output Voltage	V_{OH}^{\ddagger}	8 12	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	VDC	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	VDC
"OR" Logical "0" Output Voltage	V_{OL}	2 8 12	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	VDC	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	VDC
Bias Driver Output Voltage	V_{BB} ①	9	-1.35	-1.20	-1.26	-1.10	-1.11	-0.98	VDC	-1.28	-1.14	-1.26	-1.10	-1.19	-1.04	VDC
Switching Times			Typ	Max	Typ	Max	Typ	Max		Typ	Max	Typ	Max	Typ	Max	
Propagation Delay	t_{3-1} t_{3-1} t_{3-2} t_{3-2}	1 1 2 2	4.0 7.0 7.0 8.0	8.0 4.0 4.0 5.0	5.0 7.0 5.5 6.0	8.0 5.0 5.5 9.0	6.0 5.0 5.0 6.0	9.0 8.0 8.0 9.0	ns	4.0 7.0 7.0 8.0	8.0 4.0 7.0 8.0	5.0 4.0 4.0 5.0	8.5 7.5 7.5 8.5		ns	
Rise Time	t_{1-} t_{2-}	1 2	7.0 7.0	4.0 4.0	7.0 7.0	5.0 5.0	8.0 8.0	8.0 8.0		7.0 7.0	4.0 4.0	7.0 7.0	4.0 4.0	7.5 7.5		
Fall Time	t_{1-} t_{2-}	1 2	5.0 5.0	9.0 9.0	6.0 6.0	9.0 9.0	8.0 8.0	11 11		5.0 5.0	9.0 9.0	6.0 6.0	9.0 9.0	7.0 7.0	10 10	

① V_{BB} supplied from pin 9, and is applicable from a load of 0 mA to -1.0 mA. ② V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA).

SWITCHING TIME TEST CIRCUIT • 25°C

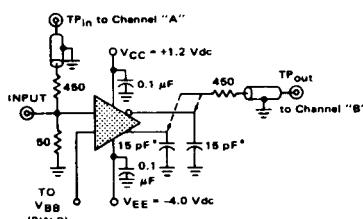


* Load Corresponds to a Fan-Out = 3.

Input Pulse t_p and t_f
= 5.0 ± 0.6 ns

@Test Temperature		TEST VOLTAGE/CURRENT VALUES Vdc ± 1.0%					mAdc I_L
		V _H min to V _L max	V _H min to V _H max	V _L max	V _{EE}	V _{BB}	
MC1235	-55°C	-5.2 to -1.405	-1.165 to -0.825	-	-	-	2.5
	+25°C	-5.2 to -1.325	-1.025 to -0.700	0.700	-5.2	-	2.5
	+125°C	-5.2 to -1.205	-0.875 to -0.530	-	-5.2	-	2.5
	0°C	-5.2 to -1.350	-1.070 to -0.740	-	-5.2	-	2.5
MC1035	+25°C	-5.2 to -1.325	-1.025 to -0.700	0.700	-5.2	-	2.5
	+75°C	-5.2 to -1.260	-0.950 to -0.615	-	-5.2	-	2.5

Characteristic	Symbol	Pin Under Test	TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:					V _{CC} (Gnd)
			V _H min to V _L max	V _H min to V _H max	V _L max	V _{EE}	V _{BB}	
Power Supply Drain Current	I _E	7	-	-	-	7	3.5,10	14
Input Current	i _{in}	3	-	-	3	6.7,11	4.5,10	-
		4	-	-	4	6.7,11	3.5,10	-
		5	-	-	5	4.7,11	3.6,10	-
		6	-	-	6	4.7,11	3.5,10	-
		10	-	-	10	4.6,10	3.5,11	-
		11	-	-	11	4.6,11	3.5,10	-
Input Leakage Current	I _R	3	-	-	-	3.6,7,11	4.5,10	-
		4	-	-	-	4.6,7,11	3.5,10	-
		5	-	-	-	4.5,7,11	3.6,10	-
		6	-	-	-	4.6,7,11	3.5,10	-
		10	-	-	-	4.6,7,10	3.5,11	-
		11	-	-	-	4.6,7,11	3.5,10	-
"NOR" Logical "1" Output Voltage	V _{OH} ‡	1	-	-	-	5.7,10	4.6,11	1
		8	-	-	-	3.7,10	-	8
		13	-	-	-	3.5,7	-	13
"NOR" Logical "0" Output Voltage	V _{OL}	1	-	-	3	-	5.7,10	4.6,11
		8	-	-	5	-	3.7,10	-
		13	-	-	10	-	3.5,7	-
"OR" Logical "1" Output Voltage	V _{OH} ‡	2	-	-	3	-	6.7,10	4.5,11
		8	-	-	6	-	3.7,10	8
		12	-	-	10	-	3.6,7	12
"OR" Logical "0" Output Voltage	V _{OL}	2	-	-	3	-	6.7,10	4.5,11
		8	-	-	6	-	3.7,10	-
		12	-	-	10	-	3.6,7	-
Bias Driver Output Voltage	V _{BB} ①	9	-	-	-	7	3.5,10	-
Switching Times Propagation Delay	Pulse In	Pulse Out	(±1.2 V)					14
	t ₃₊₁₋	1	-	-	6.7,10	4.5,11	-	
	t ₃₋₁₊	1	-	-	-	-	-	
	t ₃₊₂₊	2	-	-	-	-	-	
Rise Time	t ₁₊	1	-	-	-	-	-	-
	t ₂₊	2	-	-	-	-	-	-
Fall Time	t ₁₋	1	-	-	-	-	-	-
	t ₂₋	2	-	-	-	-	-	-

SWITCHING TIME WAVEFORMS

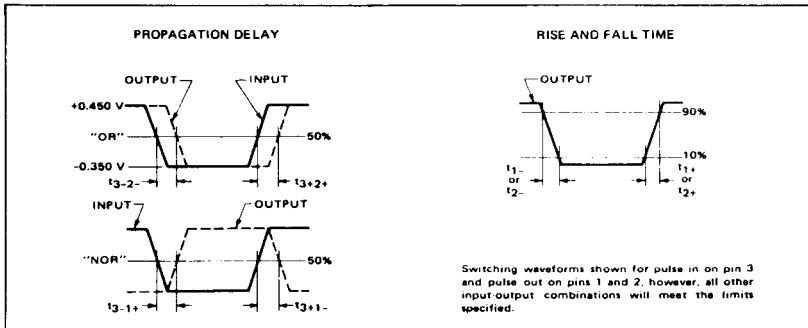

APPLICATIONS INFORMATION

The MC1035/MC1235 is a dual Schmitt trigger/triple differential amplifier designed for interfacing into a MECL system. Signals with very slow rise and fall times and with low voltage swings can be converted to MECL signal levels with MECL rise and fall times to operate flip-flops and gates (see Figures 1 and 2). The circuit also acts as a triple level translator from negative power supply logic circuits, such as those used in PNP discrete component systems and MOS systems, to MECL levels (Figure 3).

The differential inputs allow a threshold of V_{GG} (obtained by connecting the internal V_{BB} reference voltage available at pin 9 to one side of the differential pair) or some other value (externally generated) to be set for the switching point. The internally-generated reference should lie between -0.5 Vdc and a value no more negative than 1.7 volts above V_{EE}. This permits a 3.0-volt range over which the input voltage may vary without affecting the characteristics of the device when using the nominal supply voltage of -5.2 Vdc.

Some of the general properties of the MC1036/MC1235 for each of the three amplifiers are:

Voltage gain = 6.0 V/V (single-ended) or 12 V/V (differential)

Bandwidth (at the -3.0 dB point) = 45 to 50 MHz

Useful min = to 100 MHz

Common mode rejection ratio = ≈ 80 dB

The amplifiers may be cascaded in various combinations for different gains. A typical gain of 60 dB with an overall bandwidth of 40 MHz can be realized by cascading amplifiers. This makes it useful as an RF/IF amplifier and limiter as shown in Figure 4, or as a wideband video amplifier as shown in Figures 5 and 6. The common-mode rejection ratio in this configuration is typically 80 dB due to the active current source for each amplifier.

The active current source in the differential-pair emitters reduces the effects of saturation so that input levels more positive than maximum MECL logic "1" levels can be applied before

saturation occurs. This effect can be seen in Figure 7. Notice also in Figure 7 that the "NOR" logic "0" transfer characteristics do not exhibit the normal droop as the input is made more positive.

Figures 8 through 12 illustrate additional applications for the MC1035/MC1235 as an A/D comparitor (Figure 8), a zero crossing detector (Figure 9), a low-current power supply buffer amplifier (Figure 10), and a V_{BB} buffered supply (Figures 11 and 12).

FIGURE 1 – DUAL SCHMITT TRIGGER

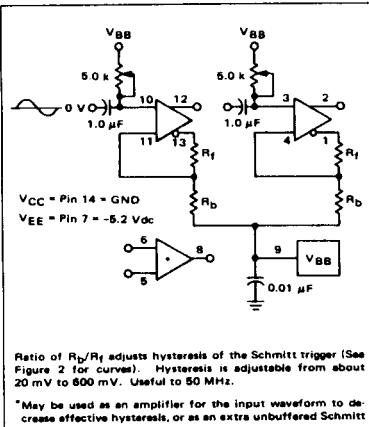


FIGURE 2 - HYSTERESIS CURVES FOR DUAL SCHMITT TRIGGER


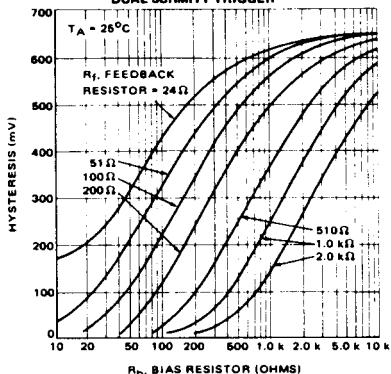


FIGURE 3 – TRIPLE MOS-TO-MECL TRANSLATOR

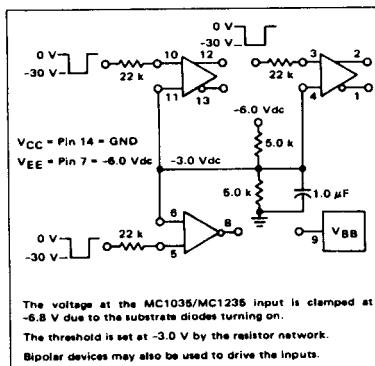

MC1035, MC1235 (continued)

APPLICATIONS INFORMATION (continued)

FIGURE 4 -- RF AMPLIFIER/FM AMPLIFIER-LIMITER

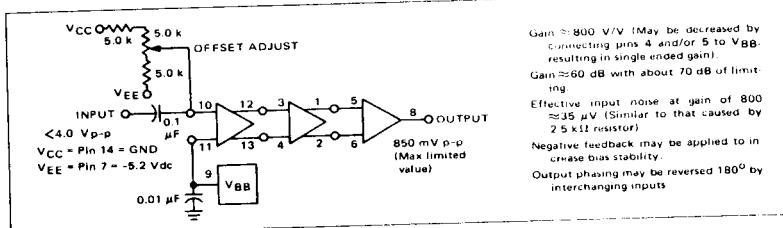


FIGURE 5 -- WIDEBAND VIDEO AMPLIFIER WITH BIAS FEEDBACK

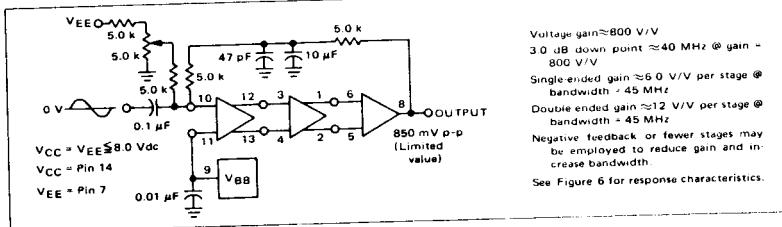


FIGURE 6 -- VIDEO AMPLIFIER RESPONSE CHARACTERISTICS

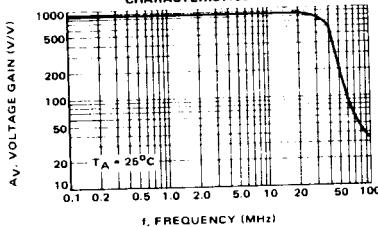


FIGURE 7 -- MC1035/MC1235 TRANSFER CHARACTERISTICS


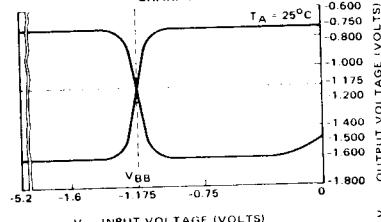


FIGURE 8 -- A/D COMPARATOR

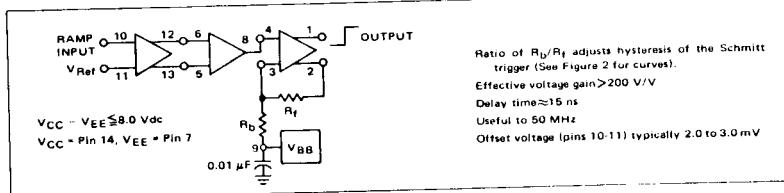

MC1035, MC1235 (continued)

APPLICATIONS INFORMATION (continued)

FIGURE 9 - ZERO CROSSING DETECTOR

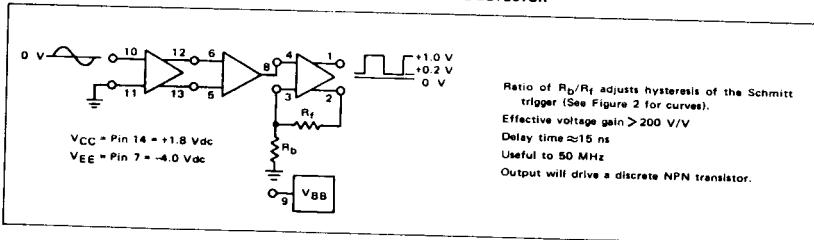


FIGURE 10 - LOW CURRENT POWER SUPPLY-BUFFER AMPLIFIER

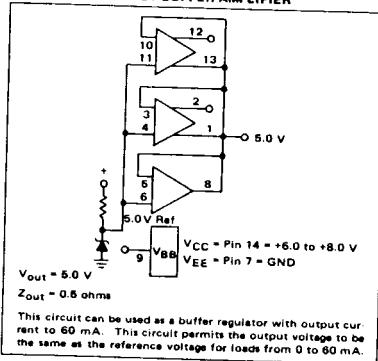


FIGURE 11 - V_{BB} BUFFERED SUPPLY

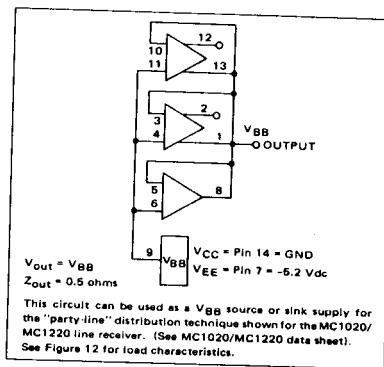


FIGURE 12 - BUFFERED V_{BB} SUPPLY versus LOADING

