


LED LAMP - Water Clear

0.200 (5.08) 0.350 (8.89) 0.330 (8.38) 0.0023 (0.58) 0.017 (0.43) SQ. (2X) NOM PLAT DENOTES CATHODE

SUPER YELLOW MV8313 MV8314 MV8315 MV8316 MV8317 MV831X

FEATURES

- Popular T-1 3/4 package
- Super high brightness suitable for outdoor applications
- · Solid state reliability
- · Water clear optics
- · Standard 100 mil. lead spacing



NOTES:

Ø0.230 (5.84)

- 1. Dimensions for all drawings are in inches (mm).
- 2. Lead spacing is measured where the leads emerge from the package.
- 3. Protruded resin under the flange is 1.5 mm (0.059") max.

DESCRIPTION

This T-1 3/4 super bright LED has a narrow viewing angle of 12° for concentrated light output. The MV831X series is made with an AllnGaP LED that emits yellow light at 590 nm. It is encapsulated in a water clear epoxy lens package.

ABSOLUTE MAXIMUM RATINGS (T _A = 25°C unless otherwise specified)						
Parameter	Symbol	Rating	Unit			
Operating Temperature	T _{OPR}	-40 to +100	°C			
Storage Temperature	T _{STG}	-40 to +100	°C			
Lead Soldering Time	T _{SOL}	260 for 5 sec	°C			
Continuous Forward Current	I _F	30	mA			
Peak Forward Current		160	mA			
(f = 1.0 KHz, Duty Factor = 1/10)	l _F	100	l ma			
Reverse Voltage	V _R	5	V			
Power Dissipation	P _D	85	mW			



LED LAMP - Water Clear

SUPER YELLOW MV8313 MV8314 MV8315 MV8316 MV8317 **MV831X**

ELECTRICAL / OPTICAL CHARACTERISTICS (TA =25°C)						
Part Number	MV8313	MV8314	MV8315	MV8316	MV8317	Condition
Luminous Intensity (mcd)						I _F = 20 mA
Minimum	630	1000	1600	2500	4500	
Typical	940	1500	2400	3500	5500	
Forward Voltage (V)						I _F = 20 mA
Maximum	2.8	2.8	2.8	2.8	2.8	
Typical	2.1	2.1	2.1	2.1	2.1	
Peak Wavelength (nm)	590	590	590	590	590	I _F = 20 mA
Spectral Line Half Width (nm)	15	15	15	15	15	I _F = 20 mA
Viewing Angle (°)	12	12	12	12	12	I _F = 20 mA

TYPICAL PERFORMANCE CURVES

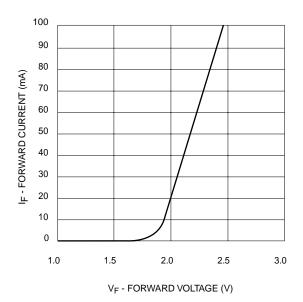


Fig. 1 Forward Current vs. Forward Voltage


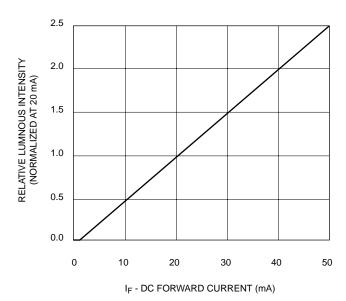


Fig. 2 Relative Luminous Intensity vs. DC Forward Current

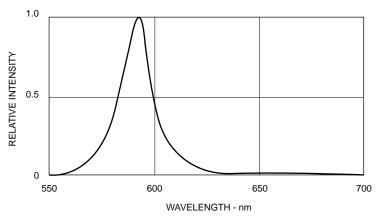

LED LAMP - Water Clear

SUPER YELLOW MV8313 MV8314 MV8315 MV8316 MV8317 MV831X



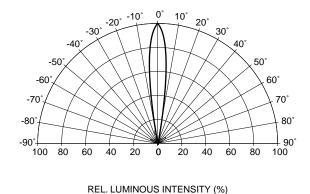


Fig. 3 Relative Intensity vs Peak Wavelength

Fig. 4 Radiation Diagram

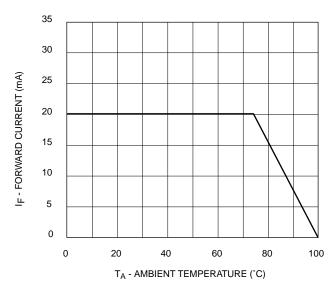


Fig. 5 Current Derating Curve



LED LAMP - Water Clear

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

© 2000 Fairchild Semiconductor Corporation



Product	Product status	Pricing*	Inventory check & ordering	Package type	Packing method
MV8313	Full Production	\$0.238	Purchase	T-1 3/4	BOX
MV8313F	Full Production	N/A	Purchase	T-1 3/4	BOX
MV8313F.MP7	Full Production	N/A	Purchase	T-1 3/4	BOX
MV8313A6A0	Full Production	N/A	Purchase	T-1 3/4	BOX

^{*} Fairchild 1,000 piece Budgetary Pricing

<u>Home</u> | <u>Find products</u> | <u>Technical information</u> | <u>Buy products</u> | <u>Support</u> | <u>Company</u> | <u>Contact us</u> | <u>Site index</u> | <u>Privacy policy</u>

Interface Logic Microcontrollers Non-Volatile Memory **Optoelectronics** Markets and <u>applications</u> New products

Product selection and

parametric search

Cross-reference

Contents General description | Features | Testing

conditions | Product status/pricing/packaging

General description

This T-1 3/4 super bright LED has a narrow viewing angle of 12° for concentrated light output. The MV831X series is made with an AllnGaP LED that emits yellow light at 590 nm. It is encapsulated in a water clear epoxy lens package.

Download this datasheet

PDF

e-mail this datasheet

ſΕ-

This page Print version

Product Change Notices

(PCNs)

Dotted li Support

Distributor and field sales

representatives

Dotted line

Quality and reliability

Dotted line Design tools

technical information

buy products

search

technical support

my Fairchild

company

back to top

Features

- Popular T-1 3/4 package
- Super high brightness suitable for outdoors applications
- Solid state reliability
- Water clear optics
- Standard 100 mil. lead spacing

back to top

Testing conditions

• $V_F @ I_F = 20 \text{ mA}; I_V @ I_F = 20 \text{ mA}$

back to top

Product	Product status	Pricing*	Inventory check & ordering	Package type	Packing method
MV8314F	Full Production	N/A	Purchase	T-1 3/4	BOX
MV8314F.MP7	Full Production	N/A	Purchase	T-1 3/4	BOX
MV8314	Full Production	\$0.238	Purchase	T-1 3/4	BOX

^{*} Fairchild 1,000 piece Budgetary Pricing

<u>Home</u> | <u>Find products</u> | <u>Technical information</u> | <u>Buy products</u> | <u>Support</u> | <u>Company</u> | <u>Contact us</u> | <u>Site index</u> | <u>Privacy policy</u>

Testing conditions

• $V_F @ I_F = 20 \text{ mA}; I_V @ I_F = 20 \text{ mA}$

back to top

Product	Product status	Pricing*	Inventory check & ordering	Package type	Packing method
MV8315	Full Production	\$0.238	Purchase	T-1 3/4	BOX
MV8315A	Full Production	N/A	Purchase	T-1 3/4	BOX
MV8315A.A4R0	Full Production	\$0.245	Purchase	T-1 3/4	BOX

^{*} Fairchild 1,000 piece Budgetary Pricing

<u>Home</u> | <u>Find products</u> | <u>Technical information</u> | <u>Buy products</u> | <u>Support</u> | <u>Company</u> | <u>Contact us</u> | <u>Site index</u> | <u>Privacy policy</u>

Testing conditions

• $V_F @ I_F = 20 \text{ mA}; I_V @ I_F = 20 \text{ mA}$

back to top

Product	Product status	Pricing*	Inventory check & ordering	Package type	Packing method
MV8317.A4R0	Full Production	\$0.245	Purchase	T-1 3/4	BOX
MV8317	Full Production	\$0.238	Purchase	T-1 3/4	BOX

^{*} Fairchild 1,000 piece Budgetary Pricing

<u>Home</u> | <u>Find products</u> | <u>Technical information</u> | <u>Buy products</u> | <u>Support</u> | <u>Company</u> | <u>Contact us</u> | <u>Site index</u> | <u>Privacy policy</u>