



- Meets or Exceeds the Requirements of ANSI TIA/EIA-232-C
- Wide Range of Supply Voltage  
 $V_{CC} = \pm 4.5 \text{ V to } \pm 15 \text{ V}$
- Low Power . . . 117 mW ( $V_{CC} = \pm 9 \text{ V}$ )
- Receiver Output TTL Compatible
- Response Control Provides:
  - Input Threshold Shifting
  - Input Noise Filtering



## description

The SN751701 line driver and receiver is designed to satisfy the requirements of the standard interface between data terminal equipment and data communication equipment as defined by ANSI TIA/EIA-232-E. The driver used is similar to the SN75188. The receiver used is similar to the SN75189A. The device operates over a wide range of supply voltages ( $V_{CC} = \pm 4.5 \text{ V to } \pm 15 \text{ V}$ ) from the included reference regulator.

## logic diagram

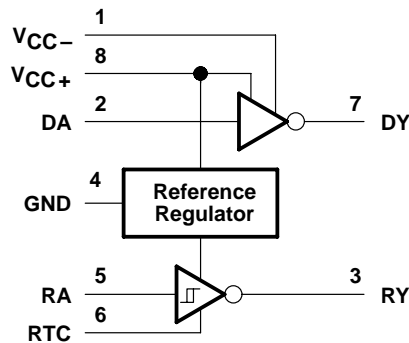


Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

# SN751701 LINE DRIVER AND RECEIVER

SLLS531 – MARCH 2002

## schematic

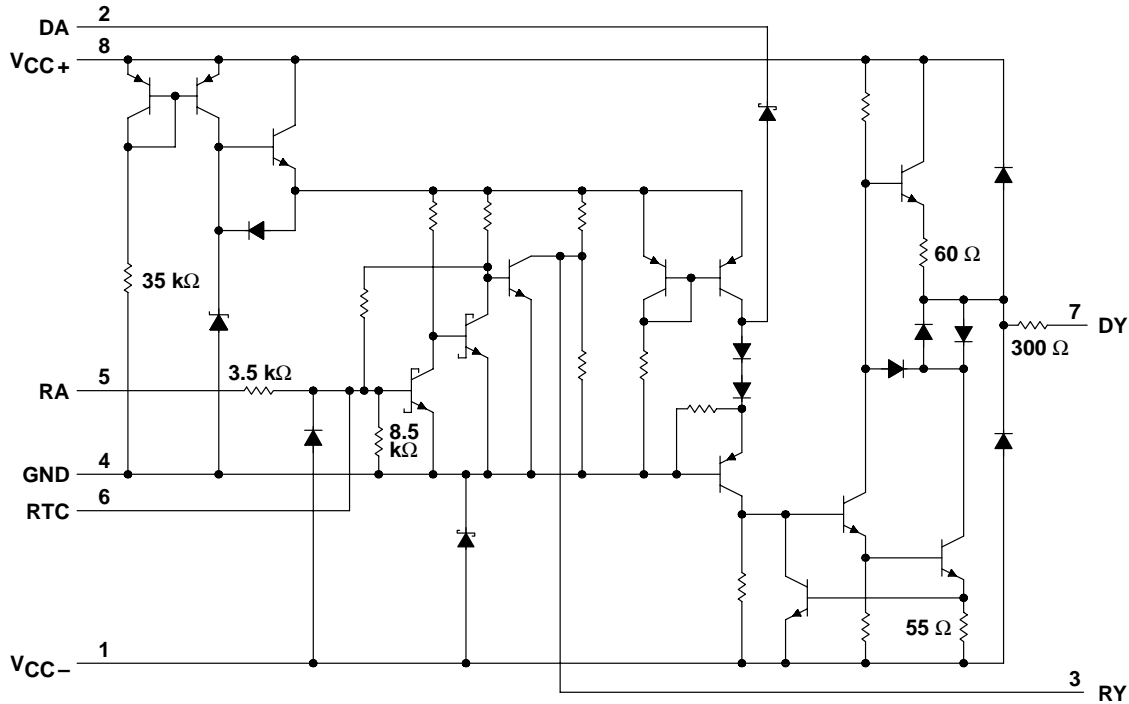

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, $V_{CC+}$ (see Note 1)	−0.4 V to 18 V
Supply voltage range, $V_{CC-}$ (see Note 1)	0.4 V to −18 V
Input voltage range, $V_I$ : Driver	−5 V to 18 V
Receiver	−30 V to 30 V
Output voltage range, $V_O$ : Driver	−25 V to 25 V
Receiver	−0.4 V to 7 V
Output current, $I_O$ (D) Driver	50 mA
Response control current range, $I_{RES}$	−10 mA to 10 mA
Continuous total power dissipation	See Dissipation Rating Table
Package thermal impedance, $\theta_{JA}$ (see Note 2): P package	85°C/W
PS package	95°C/W
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C
Storage temperature range, $T_{stg}$	−65°C to 150°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values are with respect to the network ground terminal.  
2. The package thermal impedance is calculated in accordance with JESD 51-7.

**recommended operating conditions**

		MIN	MAX	UNIT	
V <sub>CC+</sub>	Supply voltage	4.5	15	V	
V <sub>CC-</sub>	Supply voltage	-4.5	-15	V	
V <sub>I(D)</sub>	Input voltage, driver		15	V	
V <sub>I(R)</sub>	Input voltage, receiver	-25	25	V	
I <sub>RESP</sub>	Response control current	-5.5	5.5	mA	
I <sub>O(R)</sub>	Output current, receiver		24	mA	
T <sub>A</sub>	Operating free-air temperature	P package	-20	85	°C
		PS package	-20	70	

**electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)**

**total device**

PARAMETER	TEST CONDITIONS		MIN	TYP†	MAX	UNIT
I <sub>CCH+</sub> High-level supply current	V <sub>CC</sub> = ±5 V	V <sub>I(D)</sub> = 2 V, V <sub>I(R)</sub> = V <sub>T+(max)</sub> , Output open		6.3	8.1	mA
	V <sub>CC</sub> = ±9 V			9.1	11.9	
	V <sub>CC</sub> = ±12 V			10.4	14	
I <sub>CCL+</sub> Low-level supply current	V <sub>CC</sub> = ±5 V	V <sub>I(D)</sub> = 0.8 V, V <sub>I(R)</sub> = V <sub>T-(min)</sub> , Output open		2.5	3.4	mA
	V <sub>CC</sub> = ±9 V			3.7	5.1	
	V <sub>CC</sub> = ±12 V			4.1	5.6	
I <sub>CCH-</sub> High-level supply current	V <sub>CC</sub> = ±5 V	V <sub>I(D)</sub> = 2 V, V <sub>I(R)</sub> = V <sub>T+(max)</sub> , Output open		-2.4	-3.1	mA
	V <sub>CC</sub> = ±9 V			-3.9	-4.9	
	V <sub>CC</sub> = ±12 V			-4.8	-6.1	
I <sub>CCL-</sub> Low-level supply current	V <sub>CC</sub> = ±5 V	V <sub>I(D)</sub> = 0.8 V, V <sub>I(R)</sub> = V <sub>T-(min)</sub> , Output open		-0.2	-0.35	mA
	V <sub>CC</sub> = ±9 V			-0.25	-0.4	
	V <sub>CC</sub> = ±12 V			-0.27	-0.45	
I <sub>CC+</sub> Positive supply current	V <sub>CC</sub> = ±5 V	V <sub>I(R)</sub> = V <sub>T+(max)</sub> , V <sub>I(D)</sub> = 0 V, V <sub>CC-</sub> = 0 V, Output open		4.8	6.4	mA
	V <sub>CC</sub> = ±12 V			6.7	9.1	

† All typical values are at T<sub>A</sub> = 25°C.

# SN751701 LINE DRIVER AND RECEIVER

SLLS531 – MARCH 2002

electrical characteristics over recommended operating free-air temperature range,  $V_{CC+} = 12\text{ V}$ ,  $V_{CC-} = -12\text{ V}$  (unless otherwise noted)

## driver section

PARAMETER		TEST CONDITIONS	MIN	TYP†	MAX	UNIT
$V_{IH}$	High-level input voltage		2			V
$V_{IL}$	Low-level input voltage				0.8	V
$V_{OH}$	High-level output voltage	$V_{I(D)} = 0.8\text{ V}$ , $R_L = 3\text{ k}\Omega$	$V_{CC} = \pm 5\text{ V}$	3.2	3.7	V
			$V_{CC} = \pm 9\text{ V}$	6.5	7.2	
			$V_{CC} = \pm 12\text{ V}$	8.9	9.8	
$V_{OL}$	Low-level output voltage	$V_{I(D)} = 2\text{ V}$ , $R_L = 3\text{ k}\Omega$	$V_{CC} = \pm 5\text{ V}$	-3.6	-3.2	V
			$V_{CC} = \pm 9\text{ V}$	-7.1	-6.4	
			$V_{CC} = \pm 12\text{ V}$	-9.7	-8.8	
$I_{IH}$	High-level input current	$V_{I(D)} = 7\text{ V}$			5	$\mu\text{A}$
$I_{IL}$	Low-level input current	$V_{I(D)} = 0\text{ V}$	-0.73	-1.2		mA
$I_{OS(H)}$	High-level short-circuit output current	$V_{I(D)} = 0.8\text{ V}$ , $V_{O(D)} = 0\text{ V}$	-7	-12	-14.5	mA
$I_{OS(L)}$	Low-level short-circuit output current	$V_{I(D)} = 2\text{ V}$ , $V_{O(D)} = 0\text{ V}$	6.5	11.5	14	mA
$r_O$	Output resistance	$V_{CC+} = 0\text{ V}$ , $V_{O(D)} = -2\text{ V}$ to $2\text{ V}$	300			$\Omega$

† All typical values are at  $T_A = 25^\circ\text{C}$ .

switching characteristics,  $V_{CC+} = 12\text{ V}$ ,  $V_{CC-} = -12\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

## driver section (see Figure 2)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{PLH}$	Propagation delay time, low- to high-level output	$R_L = 3\text{ k}\Omega$ , $C_L = 50\text{ pF}$		340	480	ns
$t_{PHL}$	Propagation delay time, high- to low-level output			100	150	
$t_{TLH}$	Transition time, low- to high-level output	$R_L = 3\text{ k}\Omega$ , $C_L = 50\text{ pF}$		120	180	ns
$t_{THL}$	Transition time, high- to low-level output			105	160	
$t_{TLH}$	Transition time, low- to high-level output	$R_L = 3\text{ k}\Omega$ to $7\text{ k}\Omega$ (see Note 3), $C_L = 2500\text{ pF}$		2.1	3	$\mu\text{s}$
$t_{THL}$	Transition time, high- to low-level output			2.1	3	

NOTE 3: The time is measured between 3 V and -3 V on output waveform.



**electrical characteristics over recommended operating free-air temperature range,  $V_{CC+} = 12\text{ V}$ ,  $V_{CC-} = -12\text{ V}$  (unless otherwise noted)**

**receiver section (see Figure 1) (see Note 4)**

PARAMETER		TEST CONDITIONS	MIN	TYP†	MAX	UNIT	
$V_{IT+}$	Positive-going input threshold voltage		1.2	1.9	2.3	V	
$V_{IT-}$	Negative-going input threshold voltage		0.6	0.95	1.2	V	
$V_{hys}$	Hysteresis voltage ( $V_{IT+} - V_{IT-}$ )		0.6			V	
$V_{O(H)}$	High-level output voltage	$V_{I(R)} = V_{T-(min)}$ , $I_{OL} = -10\ \mu\text{A}$	$V_{CC+} = 5\text{ V}$	3.7	4.1	4.5	V
			$V_{CC+} = 12\text{ V}$	4.4	4.7	5.2	
		$V_{I(R)} = V_{T-(min)}$ , $I_{OH} = -0.4\text{ mA}$	$V_{CC+} = 5\text{ V}$	3.1	3.4	3.8	
			$V_{CC+} = 12\text{ V}$	3.6	4	4.5	
$V_{O(L)}$	Low-level output voltage	$V_{I(R)} = V_{T+(max)}$ , $I_{OL} = 24\text{ mA}$		0.2	0.3	V	
$I_{IH}$	High-level input current	$V_{I(R)} = 25\text{ V}$	3.6	6.7	8.3	mA	
		$V_{I(R)} = 3\text{ V}$	0.43	0.67	1	mA	
$I_{IL}$	Low-level input current	$V_{I(R)} = -25\text{ V}$	-3.6	-6.7	-8.3	mA	
		$V_{I(R)} = -3\text{ V}$	-0.43	-0.74	-1	mA	
$I_{OS}$	Short-circuit output current	$V_{I(R)} = V_{T-(min)}$		-2.8	-3.7	mA	

† All typical values are at  $T_A = 25^\circ\text{C}$ .


NOTE 4: Response Control pin is open.

**switching characteristics,  $V_{CC+} = 12\text{ V}$ ,  $V_{CC-} = -12\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)**


**receiver section (see Figure 2)**

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{PLH}$	Propagation delay time, low- to high-level output	$R_L = 400\text{ k}\Omega$ , $C_L = 50\text{ pF}$		150	240	ns
$t_{PHL}$	Propagation delay time, high- to low-level output			50	100	
$t_{TLH}$	Transition time, low- to high-level output	$R_L = 400\text{ k}\Omega$ , $C_L = 50\text{ pF}$		250	360	ns
$t_{THL}$	Transition time, high- to low-level output			18	35	

**PARAMETER MEASUREMENT INFORMATION**

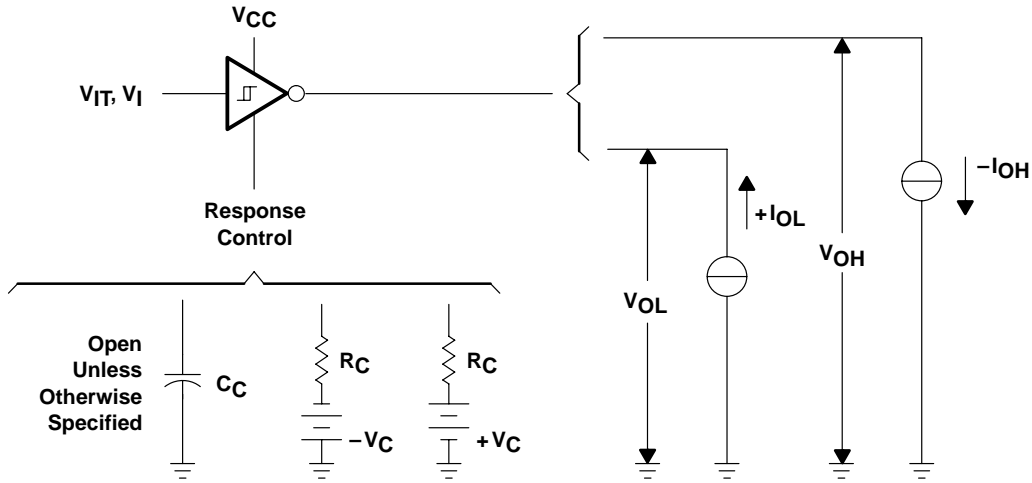



**Figure 1. Receiver Section Test Circuit ( $V_{IT+}$ ,  $V_{IT-}$ ,  $V_{OH}$ ,  $V_{OL}$ )**

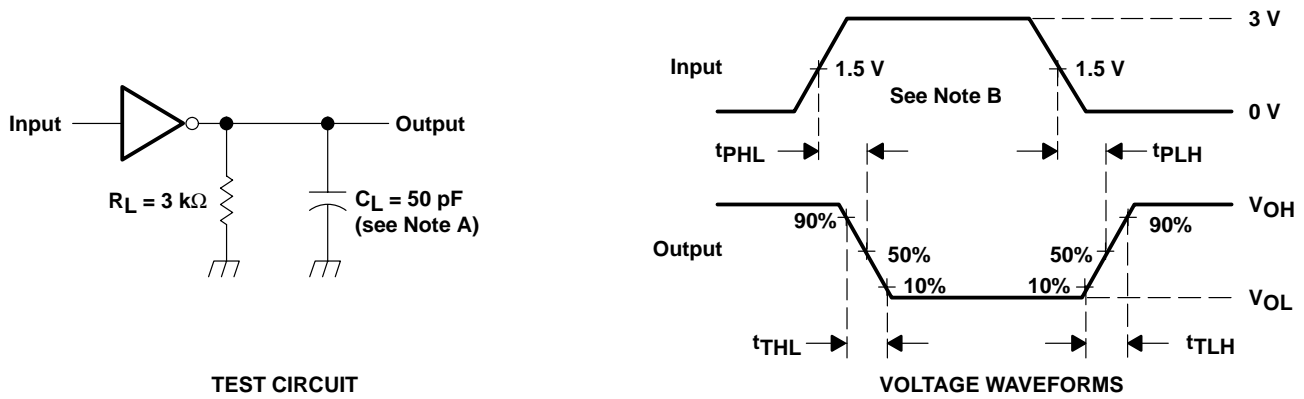

- NOTES: A.  $C_L$  includes probe and jig capacitance.  
 B. The input waveform is supplied by a generator having the following characteristics:  $Z_O = 50\ \Omega$ ,  $t_w = 500\text{ ns}$ ,  $t_{TLH} \leq 5\text{ ns}$ ,  $t_{THL} \leq 5\text{ ns}$ .

**Figure 2. Driver Section Switching Test Circuit and Voltage Waveforms**

PARAMETER MEASUREMENT INFORMATION

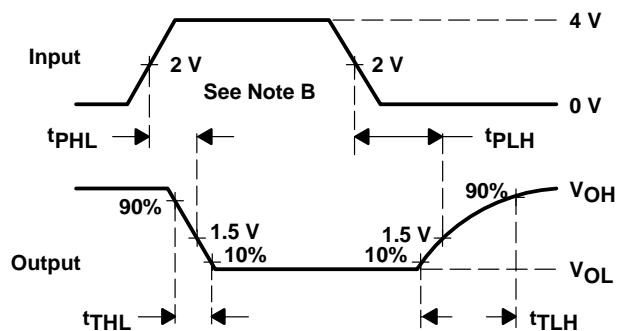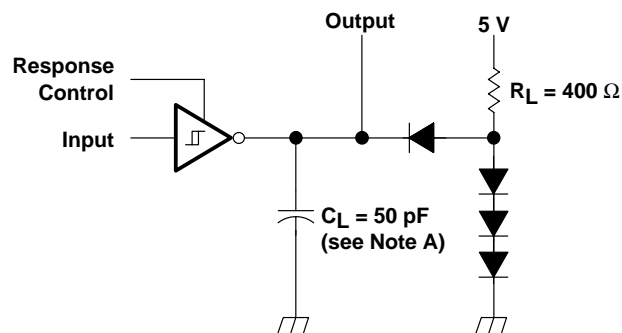

TEST CIRCUIT

VOLTAGE WAVEFORMS

- NOTES: A.  $C_L$  includes probe and jig capacitance.  
 B. The input waveform is supplied by a generator having the following characteristics:  $Z_O = 50 \Omega$ ,  $t_w = 500 \text{ ns}$ ,  $t_{THL} \leq 5 \text{ ns}$ ,  $t_{TLH} \leq 5 \text{ ns}$ .

Figure 3. Receiver Section Switching Test Circuit and Voltage Waveforms

TYPICAL CHARACTERISTICS

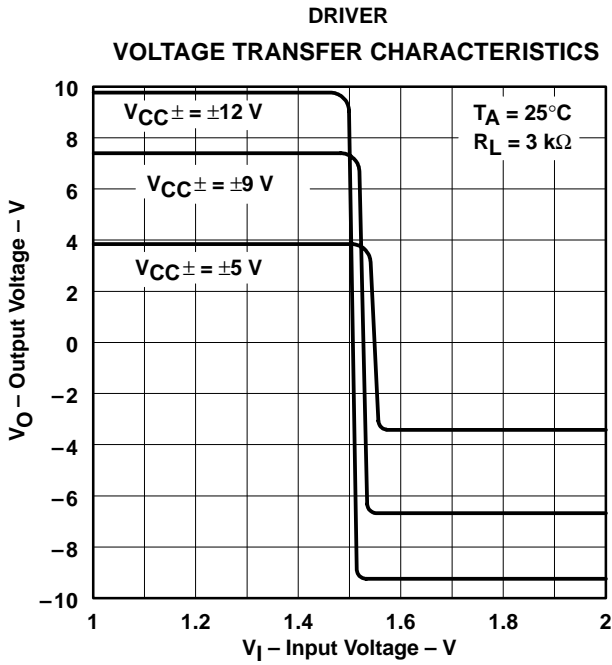


Figure 4

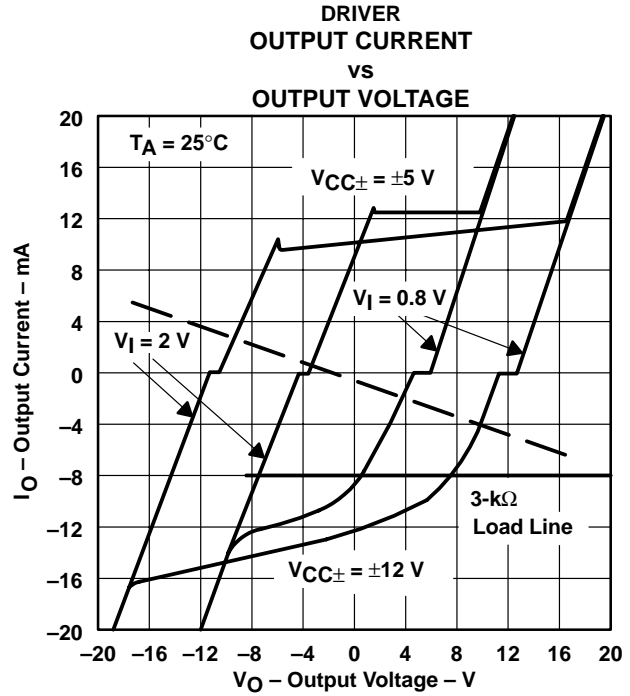


Figure 5

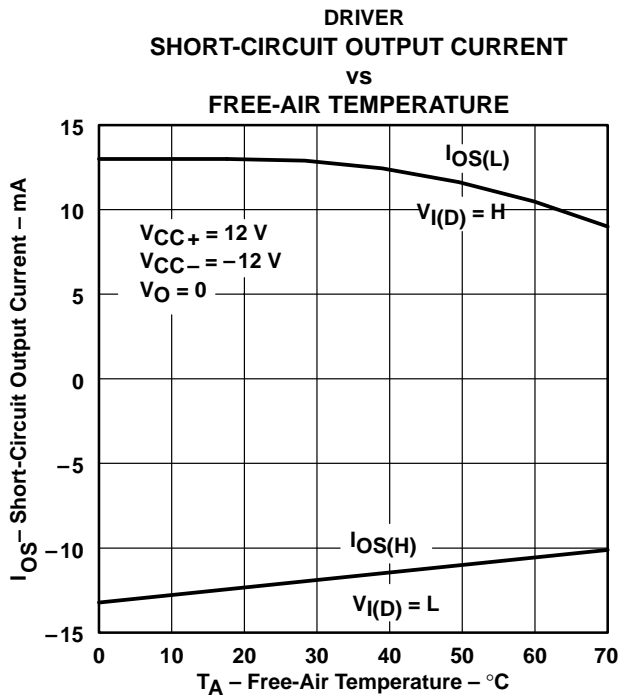


Figure 6

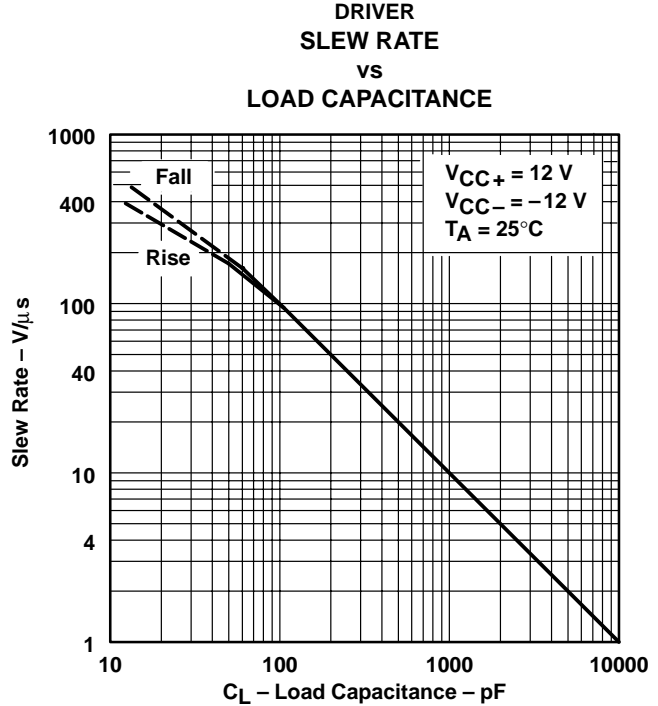


Figure 7



TYPICAL CHARACTERISTICS

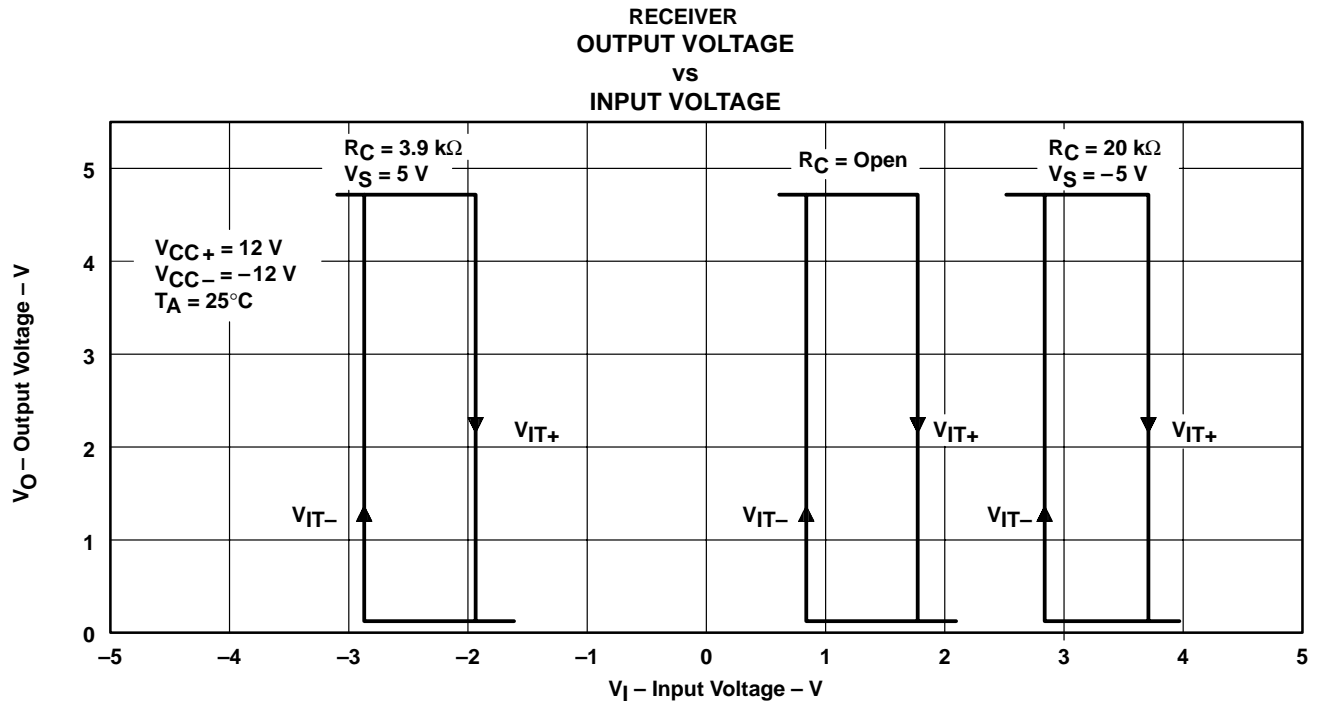


Figure 8





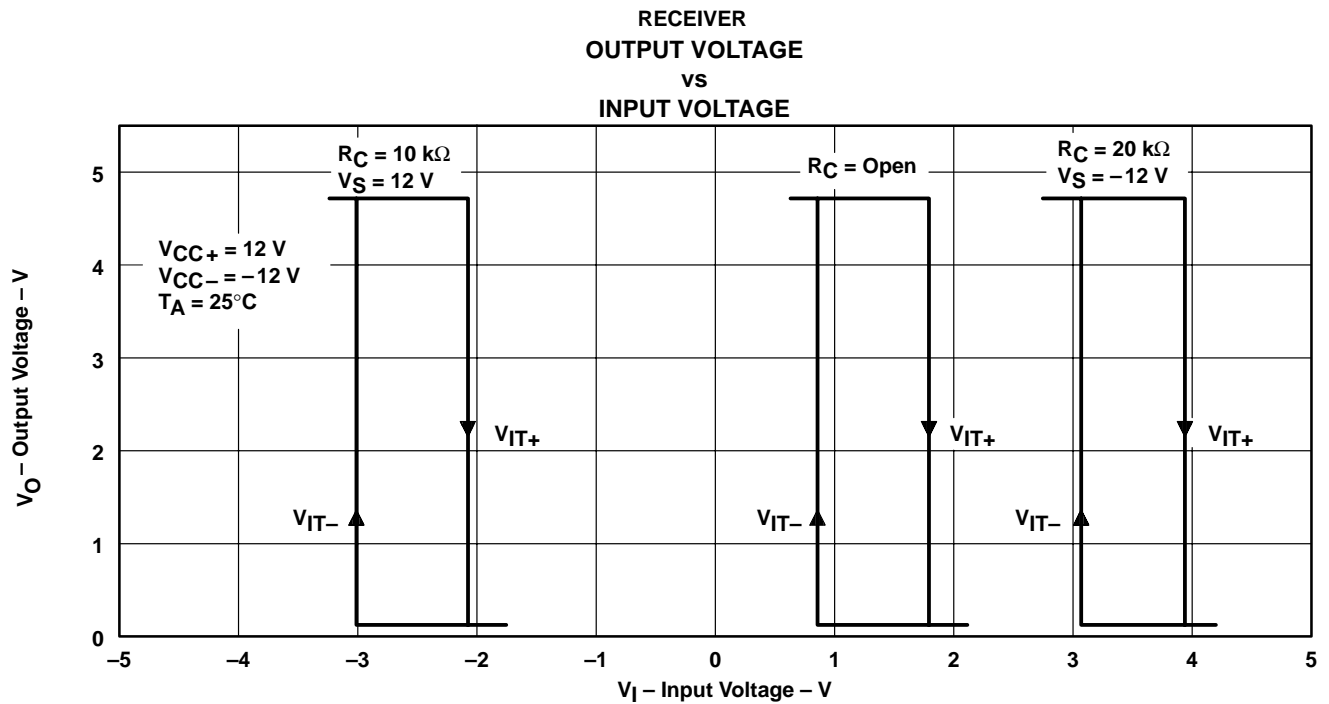


Figure 9

TYPICAL CHARACTERISTICS

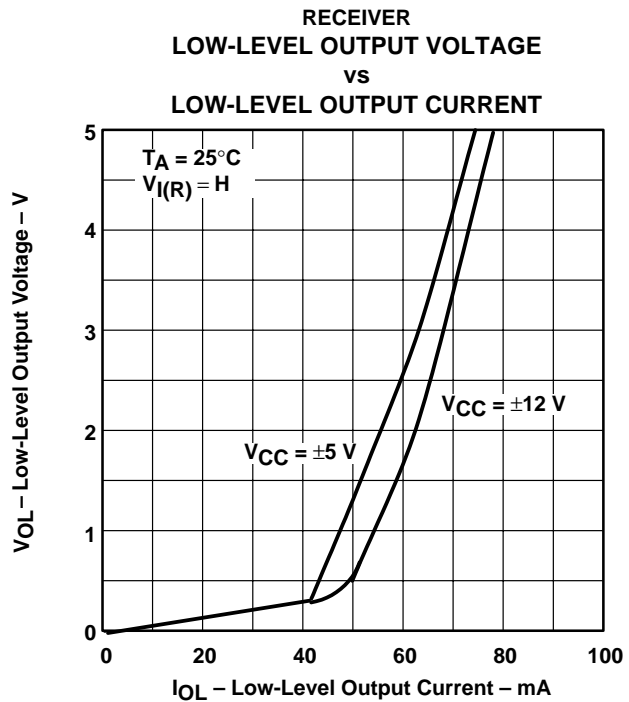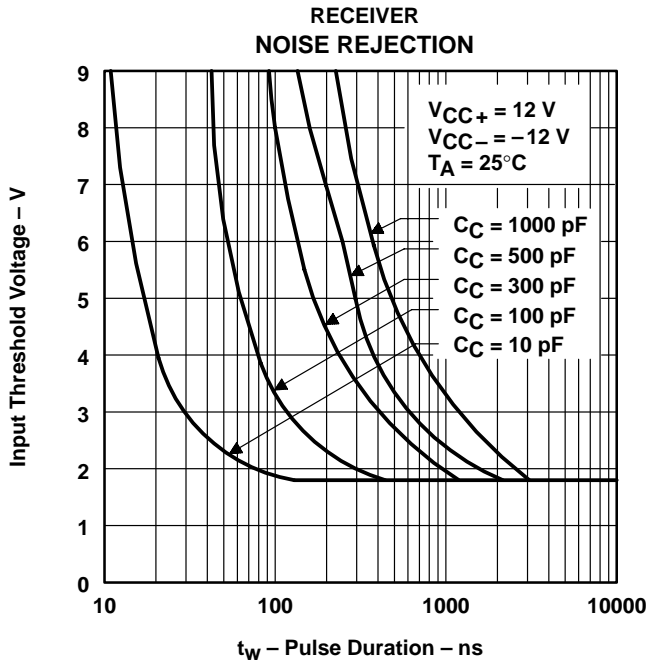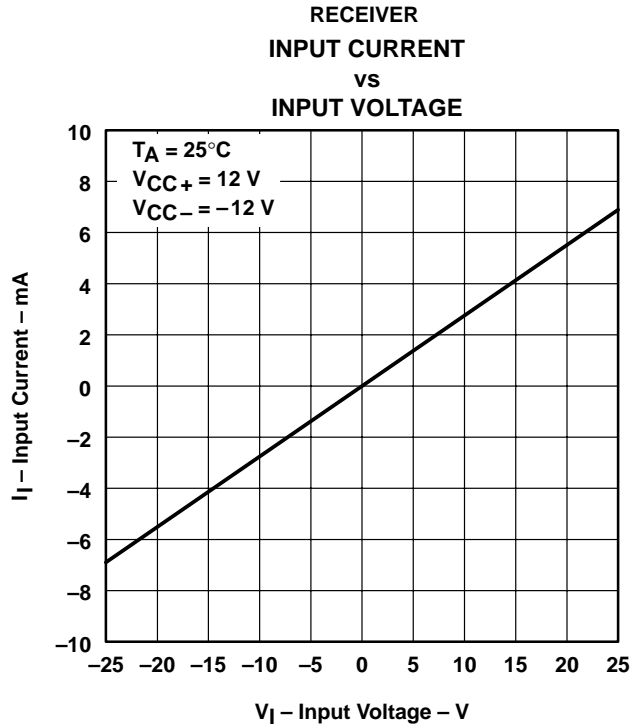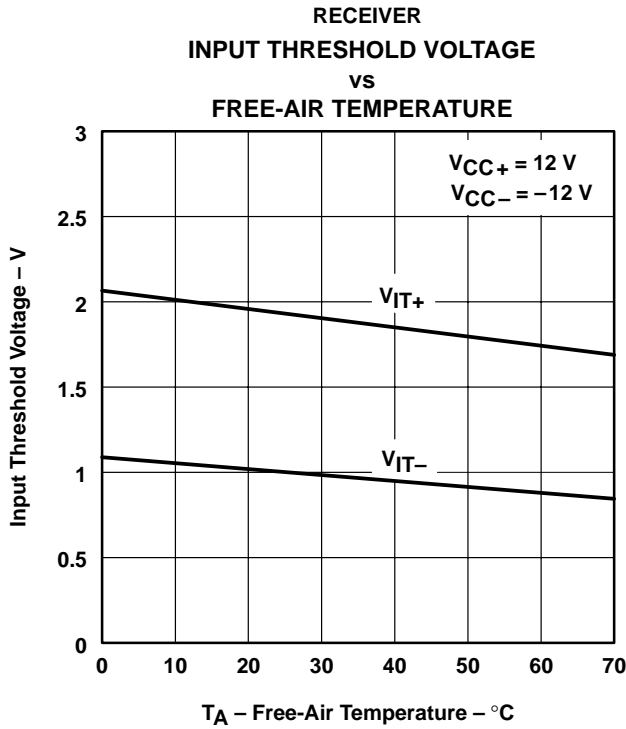

TYPICAL CHARACTERISTICS

RECEIVER  
HIGH-LEVEL OUTPUT VOLTAGE  
vs  
HIGH-LEVEL OUTPUT CURRENT

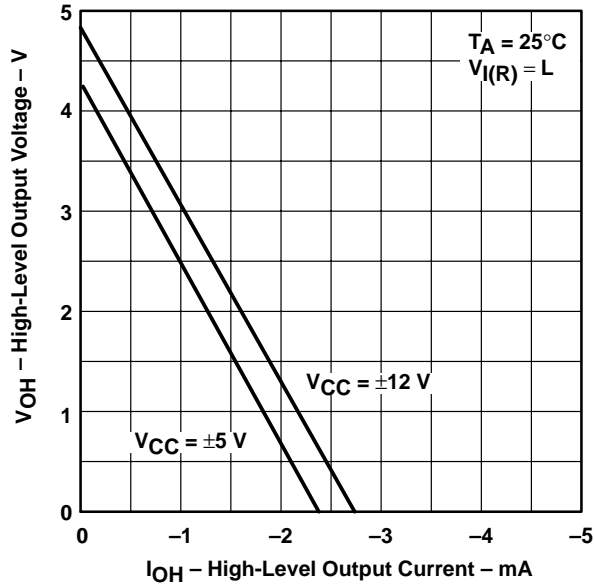


Figure 14

RECEIVER  
OUTPUT VOLTAGE  
vs  
SUPPLY VOLTAGE

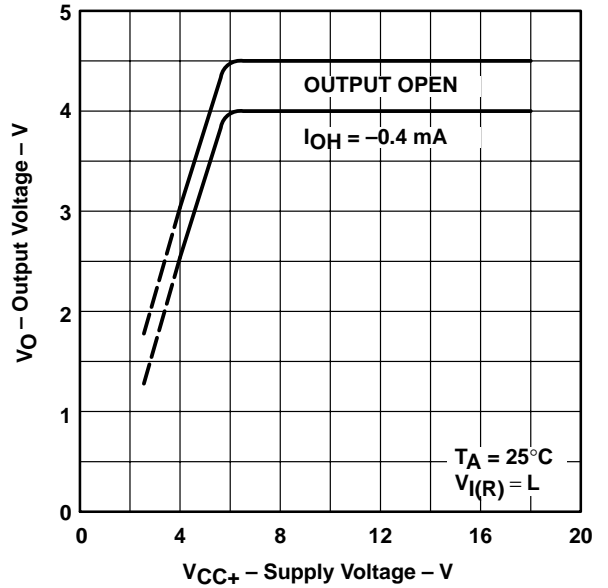


Figure 15

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

### Mailing Address:

Texas Instruments  
Post Office Box 655303  
Dallas, Texas 75265

**PRODUCT FOLDER** | PRODUCT INFO: [FEATURES](#) | [DESCRIPTION](#) | [DATASHEETS](#) | [PRICING/AVAILABILITY/PKG](#) | [APPLICATION NOTES](#) | [MORE LITERATURE](#)

## SN751701, RS-232C Regulator

DEVICE STATUS: **ACTIVE**

PARAMETER NAME	SN751701
Drivers Per Package	1
Receivers Per Package	1
Driver (RL) (Ohms)	3000
Supply Voltage(s) (V)	+ - 5, 9, 12
Driver tpd (ns)	480
Receiver tpd (ns)	240
ICC (max) (mA)	11.9

### FEATURES

[▲ Back to Top](#)

- Meets or Exceeds the Requirements of ANSI TIA/EIA-232-C
- Wide Range of Supply Voltage  $V_{CC} = \pm 4.5 \text{ V to } \pm 15 \text{ V}$
- Low Power ... 117 mW ( $V_{CC} = \pm 9 \text{ V}$ )
- Receiver Output TTL Compatible
- Response Control Provides:
  - Input Threshold Shifting
  - Input Noise Filtering

### DESCRIPTION

[▲ Back to Top](#)

The SN751701 line driver and receiver is designed to satisfy the requirements of the standard interface between data terminal equipment and data communication equipment as defined by ANSI TIA/EIA-232-E. The driver used is similar to the SN75188. The receiver used is similar to the SN75189A. The device operates over a wide range of supply voltages ( $V_{CC} = \pm 4.5 \text{ V to } \pm 15 \text{ V}$ ) from the included reference regulator.

### TECHNICAL DOCUMENTS

[▲ Back to Top](#)

To view the following documents, [Acrobat Reader 4.0](#) is required.

To download a document to your hard drive, right-click on the link and choose 'Save'.

### DATASHEET

[▲ Back to Top](#)

Full datasheet in Acrobat PDF: [sn751701.pdf](#) (174 KB) (Updated: 03/12/2002)

### APPLICATION NOTES

[▲ Back to Top](#)

- [Analog Applications Journal \(Rev. A\)](#) (SLYT010A - Updated: 03/17/2000)
- [Interface Circuits for TIA/EIA-232-F \(Rev. A\)](#) (SLLA037A - Updated: 09/19/2002)
- [Low-Voltage, Single-Supply 232-Standard Interface Solutions \(Rev. A\)](#) (SLLA083A - Updated: 09/19/2000)
- [Signaling Rate versus Transfer Rate](#) (SLLA098 - Updated: 03/01/2001)

### MORE LITERATURE

[▲ Back to Top](#)

- [Enhanced Plastic Portfolio Brochure](#) (SGZB004, 387 KB - Updated: 08/19/2002)

- [QML Class V Space Products Military Brief \(Rev. A\)](#) (SGZN001A, 257 KB - Updated: 10/07/2002)

**PRICING/AVAILABILITY/PKG**

[▲Back to Top](#)

<b>DEVICE INFORMATION</b> Updated Daily						
<u>ORDERABLE DEVICE</u>	<u>STATUS</u>	<u>PACKAGE TYPE   PINS</u>	<u>TEMP (°C)</u>	<u>PRODUCT CONTENT</u>	<u>BUDGETARY PRICING QTY   SUS</u>	<u>STD PACK QTY</u>
SN751701PSR	ACTIVE	<a href="#">SOP (PS)</a>   8	-20 TO 70	<a href="#">View Contents</a>	1KU   1.04	2000

<b>TI INVENTORY STATUS</b> As Of 09:00 AM GMT, 17 Apr 2003		
<u>IN STOCK</u>	<u>IN PROGRESS QTY   DATE</u>	<u>LEAD TIME</u>
0*	> 10k   30 Apr	2 WKS

<b>REPORTED DISTRIBUTOR INVENTORY</b> As Of 09:00 AM GMT, 17 Apr 2003		
<u>DISTRIBUTOR COMPANY   REGION</u>	<u>IN STOCK</u>	<u>PURCHASE</u>
None Reported <a href="#">View Distributors</a>		

**Table Data Updated on: 4/17/2003**

[Products](#) | [Applications](#) | [Support](#) | [my.TI](#)



© Copyright 1995-2002 Texas Instruments Incorporated. All rights reserved.

[Trademarks](#) | [Privacy Policy](#) | [Terms of Use](#)