



4-WIDE 2-INPUT
"AND-OR-INVERT" GATE

MTTL MC5400F/7400F series

MC5454F*
MC7454F*

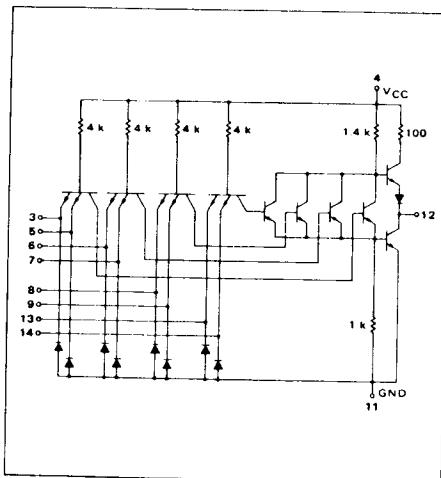

This device consists of four 2-input AND gates
ORed together and inverted.



Positive Logic:
 $12 = (3 \cdot 5) + (6 \cdot 7) + (8 \cdot 9) + (13 \cdot 14)$


Negative Logic:
 $12 = (3 \cdot 5) + (6 \cdot 7) + (8 \cdot 9) + (13 \cdot 14)$

Input Loading Factor = 1
Output Loading Factor = 10


Total Power Dissipation = 22 mW typ/pkg
Propagation Delay Time = 13 ns typ

*F suffix = TO-85 ceramic package (Case 609).
See General Information section for package outline dimensions.

SWITCHING TIME TEST CIRCUIT

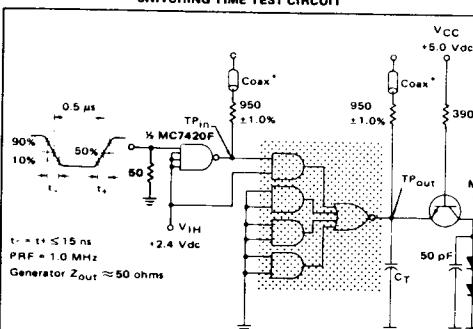

VOLTAGE WAVEFORMS AND DEFINITIONS

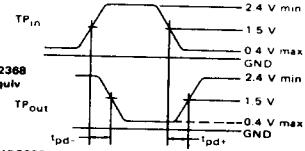


$C_T = 15 \text{ pF} = \text{total parasitic capacitance, which includes probe, wiring, and load capacitances.}$

*The coax delays from input to scope and output to scope must be matched.
The scope must be terminated in 50 ohm impedance. The 950 ohm resistor and the scope termination impedance constitute a 20:1 attenuator probe.
Coax shall be CT-070-50 or equivalent

ELECTRICAL CHARACTERISTICS

Test procedures are shown for only one input of this device. To complete testing, sequence through remaining inputs in the same manner.



TEST CURRENT/VOLTAGE VALUES (All Temperatures)

Characteristic	Symbol	Pin	MC5454 Test Limits										MC7454 Test Limits									
			Under Test	Min	Max	Unit	Under Test	Min	Max	Unit	Under Test	Min	Max	Unit	Under Test	Min	Max	Unit	Under Test	Min	Max	Unit
Forward Current	I_F	3	-	-1.6	mAdc	-	I_{OL}	-1.6	mAdc	-	V_{IH}	-	-	Volts	V_{IH}	-	-	Volts	V_{IH}	-	-	Volts
Reverse Current	I_{OL}	3	-	40	mA	-	I_{OL}	-40	mA	-	V_{IH}	-	-	mA	V_{IH}	-	-	mA	V_{IH}	-	-	mA
Output	I_{R1}	3	-	1.0	mAdc	-	I_{R2}	-1.0	mAdc	-	V_{OL}	-	-	mA	V_{OL}	-	-	mA	V_{OL}	-	-	mA
Output Voltage*	V_{OL}	12	-	0.4	Vdc	-	V_{OH}	2.4	Vdc	-	V_{OL}	12	-	Vdc	V_{OL}	12	-	Vdc	V_{OL}	12	-	Vdc
Stand-By Current	I_{SB}	12	-	.20	mA	-	I_{SB}	12	mA	-	V_{CC}	-	-	mA	V_{CC}	-	-	mA	V_{CC}	-	-	mA
Power Requirements	$P_{OP,ON}, P_{SB}$	4	-	9.2	mA	-	$P_{OP,ON}, P_{SB}$	4	mA	-	V_{CC}	-	-	Volts	V_{CC}	-	-	Volts	V_{CC}	-	-	Volts
Switching Parameters																						
Turn-On Time	t_{ON}	4	-	7.2	ns	-	t_{ON}	4	ns	-	t_{ON}	7.2	ns	ns	t_{ON}	7.2	ns	ns	t_{ON}	7.2	ns	ns
Turn-On Time	t_{ON}	4	-	7.2	ns	-	t_{ON}	4	ns	-	t_{ON}	7.2	ns	ns	t_{ON}	7.2	ns	ns	t_{ON}	7.2	ns	ns
Turn-On Time	t_{ON}	4	-	7.2	ns	-	t_{ON}	4	ns	-	t_{ON}	7.2	ns	ns	t_{ON}	7.2	ns	ns	t_{ON}	7.2	ns	ns
Turn-On Time	t_{ON}	4	-	7.2	ns	-	t_{ON}	4	ns	-	t_{ON}	7.2	ns	ns	t_{ON}	7.2	ns	ns	t_{ON}	7.2	ns	ns
Turn-On Time	t_{ON}	4	-	7.2	ns	-	t_{ON}	4	ns	-	t_{ON}	7.2	ns	ns	t_{ON}	7.2	ns	ns	t_{ON}	7.2	ns	ns

* Tested with $T = 25^\circ\text{C}$.