

December 2013

# 74LCX04 Low Voltage Hex Inverter with 5V Tolerant Inputs

# **Features**

- 5V tolerant inputs
- 2.3V–3.6V V<sub>CC</sub> specifications provided
- 5.2ns  $t_{PD}$  max. (V<sub>CC</sub> = 3.3V), 10µA I<sub>CC</sub> max.
- Power down high impedance inputs and outputs
- ±24mA output drive (V<sub>CC</sub> = 3.0V)
- Implements proprietary noise/EMI reduction circuitry
- Latch-up performance exceeds JEDEC 78 conditions
- ESD performance:
  - Human body model > 2000V
  - Machine model > 200V
- Leadless DQFN package

# **General Description**

The LCX04 contains six inverters. The inputs tolerate voltages up to 7V allowing the interface of 5V systems to 3V systems.

The 74LCX04 is fabricated with advanced CMOS technology to achieve high speed operation while maintaining CMOS low power dissipation.

Ordering Infor	mation			
Order Number	Package Number	Package Description		
74LCX04M	M14A	14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow		
74LCX04SJ	M14D	14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide		
74LCX04BQX <sup>(1)</sup>	MLP14A	14-Terminal Depopulated Quad Very-Thin Flat Pack No Leads (DQFN), JEDEC MO-241, 2.5 x 3.0mm		
74LCX04MTC	MTC14	14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide		


## Note:

1. DQFN package available in Tape and Reel only.

Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering number.

All packages are lead free per JEDEC: J-STD-020B standard.



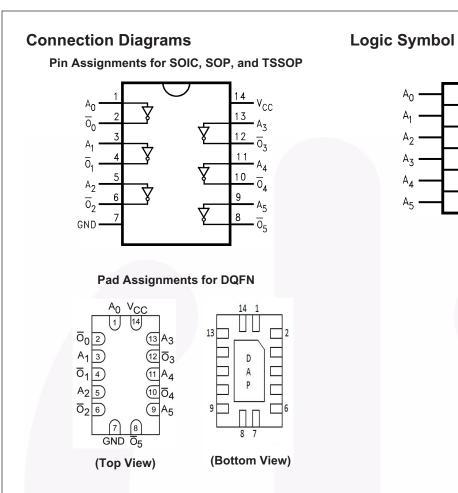


# **Pin Description**

Pin Names	Description
A <sub>n</sub> , B <sub>n</sub>	Inputs
Ōn	Outputs
DAP	No Connect

Note: DAP (Die Attach Pad)

IEEE/IEC



# **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Rating
V <sub>CC</sub>	Supply Voltage	-0.5V to +7.0V
VI	DC Input Voltage	-0.5V to +7.0V
Vo	DC Output Voltage, Output in HIGH or LOW State <sup>(2)</sup>	-0.5V to V <sub>CC</sub> + 0.5V
I <sub>IK</sub>	DC Input Diode Current, V <sub>I</sub> < GND	–50mA
I <sub>OK</sub>	DC Output Diode Current	
	V <sub>O</sub> < GND	–50mA
	V <sub>O</sub> > V <sub>CC</sub>	+50mA
Ι <sub>Ο</sub>	DC Output Source/Sink Current	±50mA
I <sub>CC</sub>	DC Supply Current per Supply Pin	±100mA
I <sub>GND</sub>	DC Ground Current per Ground Pin	±100mA
T <sub>STG</sub>	Storage Temperature	-65°C to +150°C

### Note:

2. I<sub>O</sub> Absolute Maximum Rating must be observed.

# Recommended Operating Conditions<sup>(3)</sup>

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Min.	Max.	Units
V <sub>CC</sub>	Supply Voltage			
	Operating	2.0	3.6	V
	Data Retention	1.5	3.6	
VI	Input Voltage	0	5.5	V
Vo	Output Voltage, HIGH or LOW State	0	V <sub>CC</sub>	V
I <sub>OH</sub> / I <sub>OL</sub>	Output Current			
	$V_{CC} = 3.0V - 3.6V$		±24	mA
	$V_{CC} = 2.7V - 3.0V$		±12	
	V <sub>CC</sub> = 2.3V–2.7V		±8	
T <sub>A</sub>	Free-Air Operating Temperature	-40	85	°C
$\Delta t / \Delta V$	Input Edge Rate, $V_{IN} = 0.8V-2.0V$ , $V_{CC} = 3.0V$	0	10	ns/V

### Note:

3. Unused inputs must be held HIGH or LOW. They may not float.

# **DC Electrical Characteristics**

				T <sub>A</sub> = -40°C	to +85°C	
Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	Min.	Max.	Units
V <sub>IH</sub>	HIGH Level Input Voltage	2.3–2.7		1.7		V
		2.7–3.6		2.0		
V <sub>IL</sub>	LOW Level Input Voltage	2.3–2.7			0.7	V
		2.7–3.6			0.8	
V <sub>OH</sub>	HIGH Level Output Voltage	2.3–3.6	$I_{OH} = -100 \mu A$	V <sub>CC</sub> - 0.2		V
		2.3	$I_{OH} = -8mA$	1.8		
		2.7	$I_{OH} = -12mA$	2.2		
		3.0	$I_{OH} = -18 \text{mA}$	2.4		
			$I_{OH} = -24 \text{mA}$	2.2		
V <sub>OL</sub>	LOW Level Output Voltage	2.3–3.6	I <sub>OL</sub> = 100μA		0.2	V
		2.3	$I_{OL} = 8 mA$		0.6	
		2.7	$I_{OL} = 12mA$		0.4	
		3.0	I <sub>OL</sub> = 16mA		0.4	
			$I_{OL} = 24mA$		0.55	
Ц	Input Leakage Current	2.3–3.6	$0 \le V_I \le 5.5V$		±5.0	μA
I <sub>OFF</sub>	Power-Off Leakage Current	0	$V_{\rm I}$ or $V_{\rm O} = 5.5 V$		10	μA
I <sub>CC</sub> (	Quiescent Supply Current	2.3–3.6	$V_{I} = V_{CC}$ or GND		10	μA
			$3.6V \le V_I \le 5.5V$		±10	
$\Delta I_{CC}$	Increase in I <sub>CC</sub> per Input	2.3–3.6	$V_{IH} = V_{CC} - 0.6V$		500	μA

# **AC Electrical Characteristics**

		$T_A = -40^{\circ}$ C to +85°C, $R_L = 500\Omega$						
		$\label{eq:V_CC} \begin{array}{c} V_{CC} = 3.3 V \pm 0.3 V, \\ C_{L} = 50 pF \end{array}$		V <sub>CC</sub> = 2.7V, C <sub>L</sub> = 50pF		$V_{CC} = 2.5V \pm 0.2V,$ $C_L = 30 \text{pF}$		
Symbol	Parameter	Min.	Max.	Min.	Max.	Min.	Max.	Units
t <sub>PHL</sub> , t <sub>PLH</sub>	Propagation Delay	1.5	5.2	1.5	6.0	1.5	6.2	ns
t <sub>OSHL</sub> , t <sub>OSLH</sub>	Output to Output Skew <sup>(4)</sup>		1.0					ns

## Note:

4. Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>) or LOW-to-HIGH (t<sub>OSLH</sub>).


# 74LCX04 — Low Voltage Hex Inverter with 5V Tolerant Inputs


# **Dynamic Switching Characteristics**

				$T_A = 25^{\circ}C$	
Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	Typical	Unit
V <sub>OLP</sub>	Quiet Output Dynamic Peak V <sub>OL</sub>	3.3	$C_L = 50 \text{pF}, \text{V}_{IH} = 3.3 \text{V}, \text{V}_{IL} = 0 \text{V}$	0.8	V
		2.5	$C_L = 30 \text{pF}, \text{ V}_{IH} = 2.5 \text{V}, \text{ V}_{IL} = 0 \text{V}$	0.6	
V <sub>OLV</sub>	Quiet Output Dynamic Valley V <sub>OL</sub>	3.3	$C_L = 50 \text{ pF}, V_{IH} = 3.3 \text{V}, V_{IL} = 0 \text{V}$	-0.8	V
		2.5	$C_{L} = 30 \text{ pF}, V_{IH} = 2.5 \text{V}, V_{IL} = 0 \text{V}$	-0.6	

# Capacitance

Symbol	Parameter	Conditions	Typical	Units
C <sub>IN</sub>	Input Capacitance	$V_{CC} = Open, V_I = 0V \text{ or } V_{CC}$	7	pF
C <sub>OUT</sub>	Output Capacitance	$V_{CC} = 3.3$ V, $V_I = 0$ V or $V_{CC}$	8	pF
C <sub>PD</sub>	Power Dissipation Capacitance	$V_{CC} = 3.3V$ , $V_I = 0V$ or $V_{CC}$ , f = 10MHz	25	pF

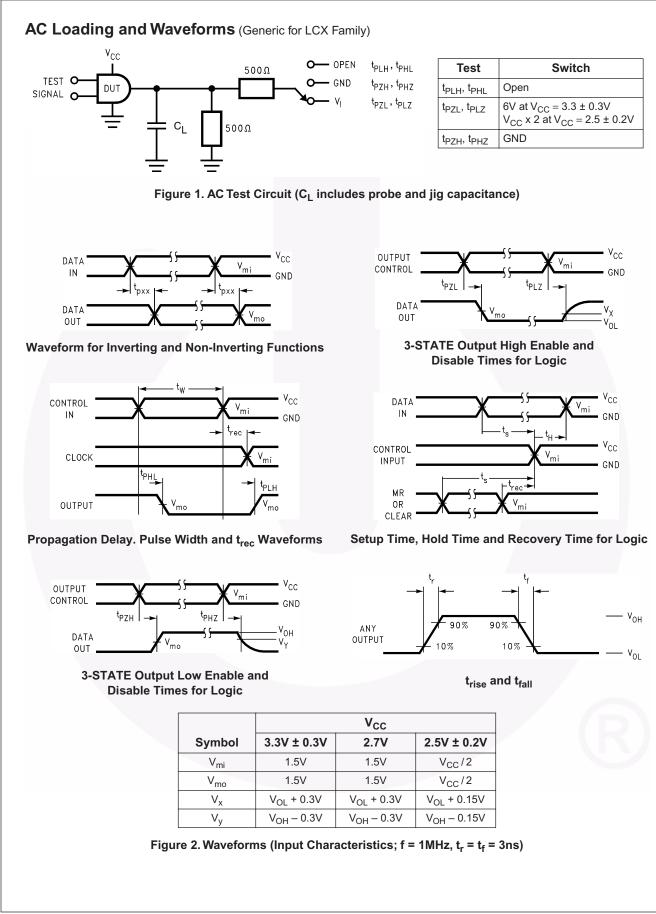

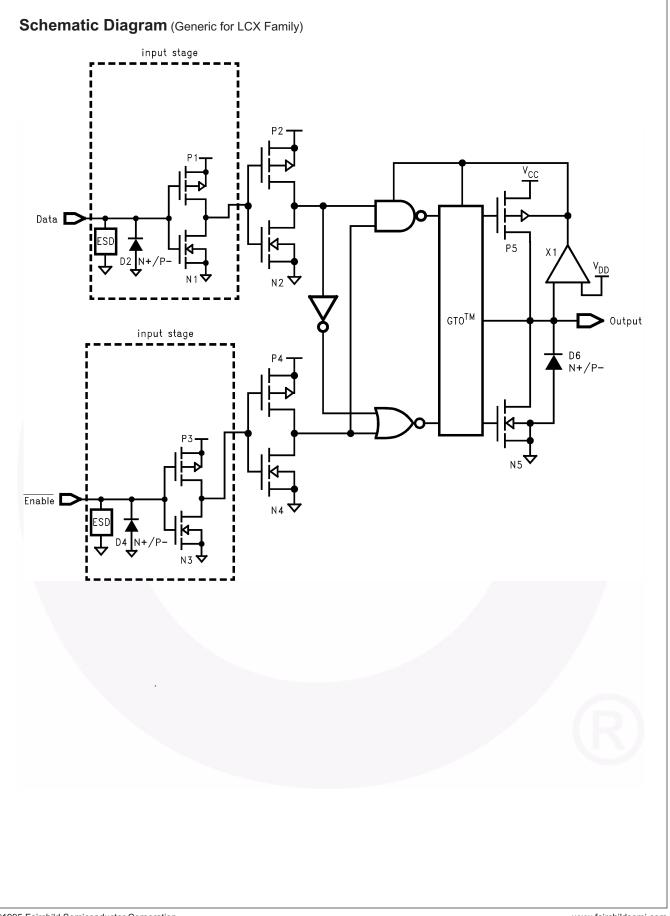


# **Tape and Reel Specification**

# **Tape Format for DQFN**

Package Designator	Tape Section	Number of Cavities	Cavity Status	Cover Tape Status
BQX	Leader (Start End)	125 (Тур.)	Empty	Sealed
	Carrier	3000	Filled	Sealed
	Trailer (Hub End)	75 (Тур.)	Empty	Sealed


### Tape Dimensions inches (millimeters)

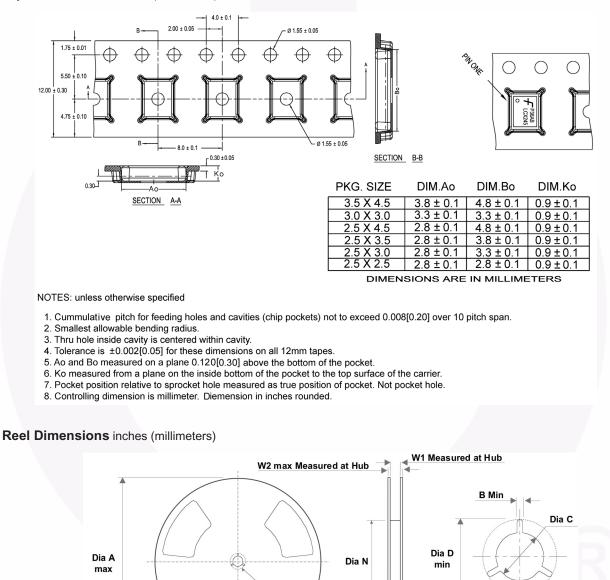

W1 W2 **Tape Size** Α В С D Ν 0.724 (18.4) 13.0 (330.0) 0.059 (1.50) 0.512 (13.00) 0.795 (20.20) 2.165 (55.00) 0.488 (12.4) 12mm

See detail AA


DETAIL AA

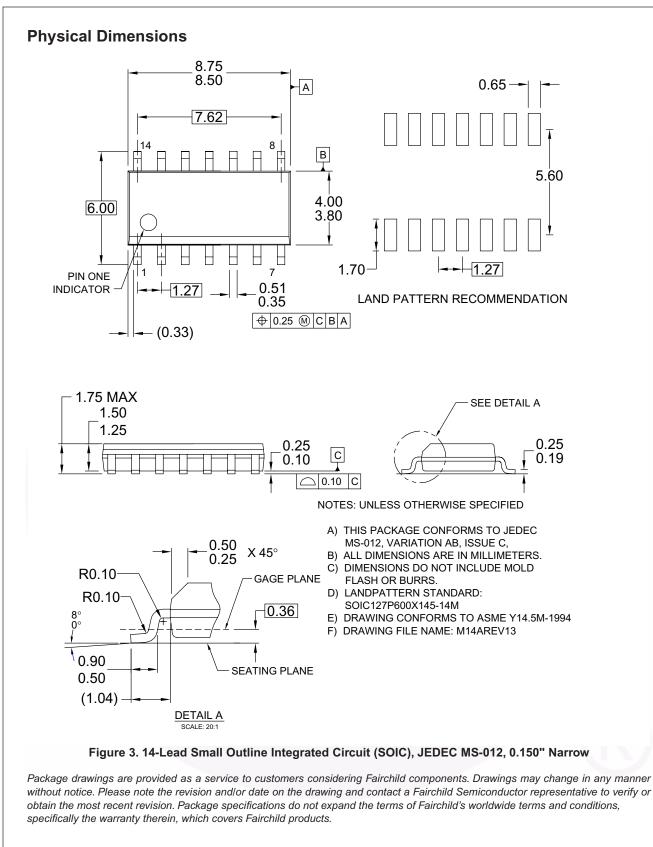


Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/packaging/

74LCX04 — Low Voltage Hex Inverter with 5V Tolerant Inputs

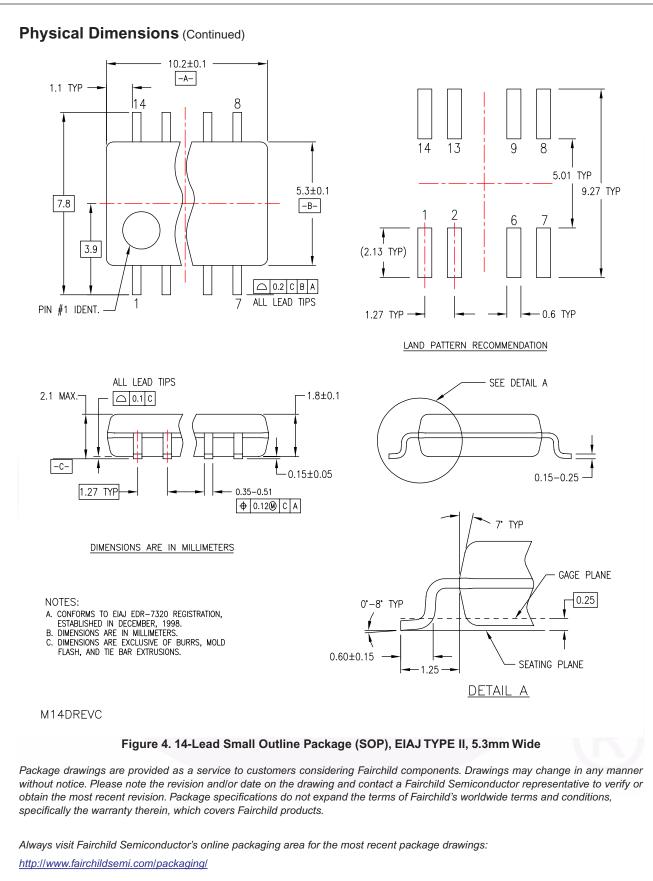

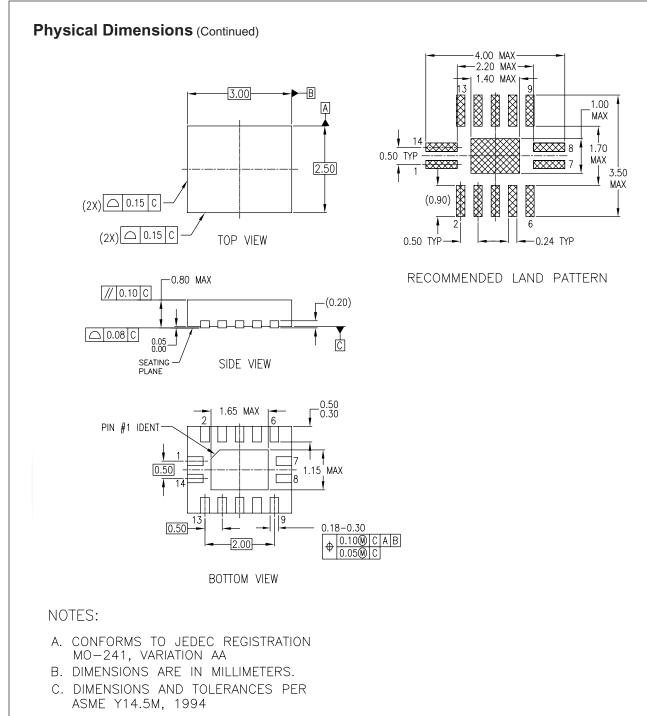

MLP14ArevA


## Figure 5. 14-Terminal Depopulated Quad Very-Thin Flat Pack No Leads (DQFN), JEDEC MO-241, 2.5 x 3.0mm

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/packaging/

74LCX04 — Low Voltage Hex Inverter with 5V Tolerant Inputs

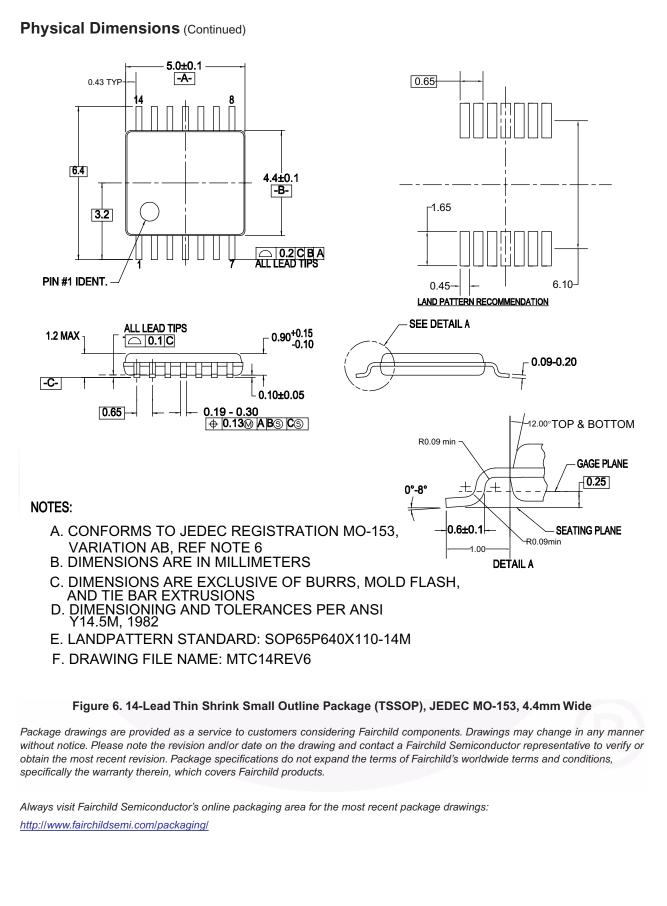

74LCX04 — Low Voltage Hex Inverter with 5V Tolerant Inputs

# FAIRCHILD

SEMICONDUCTOR

### TRADEMARKS

AccuPower™

Build it Now™

CorePLUS™

DEUXPEED®

Dual Cool™

EcoSPARK<sup>®</sup>

EfficientMax™

®

Fairchild®

FACT

FAST®

**FPS™** 

FastvCore™

FETBench™

FACT Quiet Series™

ESBC™

CorePOWER™

CROSSVOLT™

Current Transfer Logic™

AX-CAP®,

BitSiC™

CTL™

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

F-PFS™ FRFET® Global Power Resource<sup>™</sup> GreenBridge™ Green FPS™ Green FPS™ e-Series™ Gmax™ GTO™ IntelliMAX™ ISOPLANAR™ Making Small Speakers Sound Louder and Better™ MegaBuck™ MICROCOUPLER™ MicroFET™ MicroPak™ MicroPak2™ Fairchild Semiconductor® MillerDrive™ MotionMax™ mWSaver OptoHiT™ **OPTOLOGIC<sup>®</sup> OPTOPLANAR<sup>®</sup>** 

PowerTrench<sup>®</sup> PowerXS<sup>T</sup> Programmable Active Droop™ QFET QS™ Quiet Series™ RapidConfigure™ ◯™ Saving our world, 1mW/W/kW at a time™ SignalWise™ SmartMax™ SMART START™ Solutions for Your Success™ SPM<sup>®</sup> STEALTH™ SuperFET<sup>®</sup> SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 SupreMOS<sup>®</sup> SyncFET™

TinyBoost<sup>®</sup> TinyBuck

Sync-Lock™

TinyCalc™ TinyLogic® TINYOPTO™ TinyPower™ TinyPWM™ TinyWire™ TranSiC™ TriFault Detect™ TRUECURRENT®\* µSerDes™

**UHC**<sup>®</sup> Ultra FRFET™ UniFET™ VCX™ VisualMax™ VoltagePlus™ XS™

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

### **PRODUCT STATUS DEFINITIONS**

Definition of	Terms
---------------	-------

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. 166