

### BC237/238/239

# Switching and Amplifier Applications • Low Noise: BC239



# **NPN Epitaxial Silicon Transistor**

1. Collector 2. Base 3. Emitter

### **Absolute Maximum Ratings** T<sub>a</sub>=25°C unless otherwise noted

| Symbol           | Paramet                                       | Value                  | Units     |        |
|------------------|---|------------------------|-----------|--------|
| V <sub>CES</sub> | Collector-Emitter Voltage : BC237 : BC238/239 |                        | 50<br>30  | V<br>V |
| V <sub>CEO</sub> | Collector-Emitter Voltage                     | : BC237<br>: BC238/239 | 45<br>25  | V<br>V |
| V <sub>EBO</sub> | Emitter-Base Voltage                          | : BC237<br>: BC238/239 | 6<br>5    | V<br>V |
| I <sub>C</sub>   | Collector Current (DC)                        |                        | 100       | mA     |
| P <sub>C</sub>   | Collector Power Dissipation                   |                        | 500       | mW     |
| TJ               | Junction Temperature                          |                        | 150       | °C     |
| T <sub>STG</sub> | Storage Temperature                           |                        | -55 ~ 150 | °C     |

# $\textbf{Electrical Characteristics} \ \, \textbf{T}_{a} \!\!=\!\! 25^{\circ} \textbf{C} \ \, \text{unless otherwise noted}$

| Symbol                | Parameter   | Test Condition  | Min.     | Тур.         | Max.         | Units          |
|-----------------------|---|---|----------|--------------|--------------|----------------|
| BV <sub>CEO</sub>     | Collector-Emitter Breakdown Voltage<br>: BC237<br>: BC238/239 | I <sub>C</sub> =2mA, I <sub>B</sub> =0  | 45<br>25 |              |              | V              |
| BV <sub>EBO</sub>     | Emitter Base Breakdown Voltage<br>: BC237<br>: BC238/239      | I <sub>E</sub> =1μΑ, I <sub>C</sub> =0  | 6<br>5   |              |              | V              |
| I <sub>CES</sub>      | Collector Cut-off Current<br>: BC237<br>: BC238/239           | V <sub>CE</sub> =50V, V <sub>BE</sub> =0<br>V <sub>CE</sub> =30V, V <sub>BE</sub> =0  |          | 0.2<br>0.2   | 15<br>15     | nA<br>nA       |
| h <sub>FE</sub>       | DC Current Gain   | V <sub>CE</sub> =5V, I <sub>C</sub> =2mA  | 120      |              | 800          |                |
| V <sub>CE</sub> (sat) | Collector-Emitter Saturation Voltage                          | I <sub>C</sub> =10mA, I <sub>B</sub> =0.5mA<br>I <sub>C</sub> =100mA, I <sub>B</sub> =5mA   |          | 0.07<br>0.2  | 0.2<br>0.6   | V              |
| V <sub>BE</sub> (sat) | Collector-Base Saturation Voltage                             | $I_C$ =10mA, $I_B$ =0.5mA<br>$I_C$ =100mA, $I_B$ =5mA   |          | 0.73<br>0.87 | 0.83<br>1.05 | V              |
| V <sub>BE</sub> (on)  | Base-Emitter On Voltage                                       | V <sub>CE</sub> =5V, I <sub>C</sub> =2mA  | 0.55     | 0.62         | 0.7          | V              |
| f <sub>T</sub>        | Current Gain Bandwidth Product                                | V <sub>CE</sub> =3V, I <sub>C</sub> =0.5mA, f=100MHz<br>V <sub>CE</sub> =5V, I <sub>C</sub> =10mA, f=100MHz                             | 150      | 85<br>250    |              | MHz<br>MHz     |
| C <sub>ob</sub>       | Output Capacitance  | V <sub>CB</sub> =10V, I <sub>E</sub> =0, f=1MHz   |          | 3.5          | 6            | pF             |
| C <sub>ib</sub>       | Input Base Capacitance  | V <sub>EB</sub> =0.5V, I <sub>C</sub> =0, f=1MHz  |          | 8            |              | pF             |
| NF                    | Noise Figure  : BC237/238 : BC239 : BC239                     | $V_{CE}$ =5V, $I_{C}$ =0.2mA,<br>$f$ =1KHz $R_{G}$ =2K $\Omega$<br>$V_{CE}$ =5V, $I_{C}$ =0.2mA<br>$R_{G}$ =2K $\Omega$ , $f$ =30~15KHz |          | 2            | 10<br>4<br>4 | dB<br>dB<br>dB |

### h<sub>FF</sub> Classification

| · <b>-</b>      |           |           |           |
|-----------------|-----------|-----------|-----------|
| Classification  | А         | В         | С         |
| h <sub>FE</sub> | 120 ~ 220 | 180 ~ 460 | 380 ~ 800 |

# **Typical Characteristics**

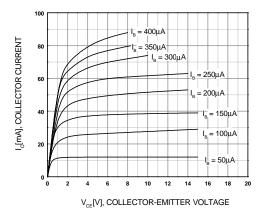


Figure 1. Static Characteristic

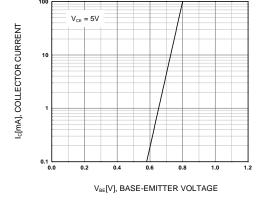


Figure 2. Transfer Characteristic

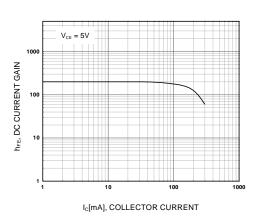


Figure 3. DC current Gain

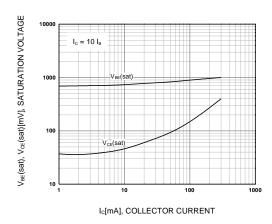


Figure 4. Base-Emitter Saturation Voltage Collector-Emitter Saturation Voltage

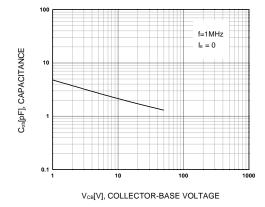


Figure 5. Output Capacitance



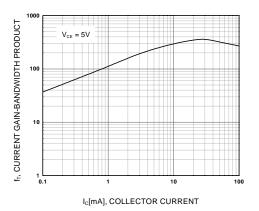



Figure 6. Current Gain Bandwidth Product

©2002 Fairchild Semiconductor Corporation Rev. A2, August 2002

TO-92

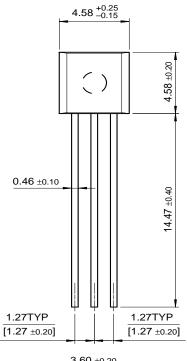

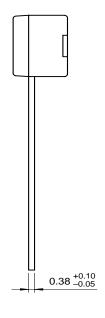



#### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

| ACEx™                | FACT™               | ImpliedDisconnect™     | PACMAN™                  | SPM™                  |
|----------------------|---------------------|------------------------|--------------------------|-----------------------|
| ActiveArray™         | FACT Quiet series™  | ISOPLANAR™             | POP™                     | Stealth™              |
| Bottomless™          | FAST <sup>®</sup>   | LittleFET™             | Power247™                | SuperSOT™-3           |
| CoolFET™             | FASTr™              | MicroFET™              | PowerTrench <sup>®</sup> | SuperSOT™-6           |
| $CROSSVOLT^{TM}$     | FRFET™              | MicroPak™              | QFET™                    | SuperSOT™-8           |
| DOME™                | GlobalOptoisolator™ | MICROWIRE™             | QS™                      | SyncFET™              |
| EcoSPARK™            | GTO™                | MSX™                   | QT Optoelectronics™      | TinyLogic™            |
| E <sup>2</sup> CMOS™ | HiSeC™              | MSXPro™                | Quiet Series™            | TruTranslation™       |
| EnSigna™             | $I^2C^{TM}$         | $OCX^{TM}$             | RapidConfigure™          | UHC™                  |
| Across the board.    | Around the world.™  | OCXPro™                | RapidConnect™            | UltraFET <sup>®</sup> |
| The Power Franchise™ |                     | OPTOLOGIC <sup>®</sup> | SILENT SWITCHER®         | VCX <sup>TM</sup>     |
| Programmable Ad      | ctive Droop™        | OPTOPLANAR™            | SMART START™             |                       |

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### **PRODUCT STATUS DEFINITIONS**

#### **Definition of Terms**

| Datasheet Identification | Product Status            | Definition  |
|--------------------------|---------------------------|---|
| Advance Information      | Formative or In<br>Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.  |
| Preliminary              | First Production          | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production           | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.   |
| Obsolete                 | Not In Production         | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.   |

Search:

Go

DATASHEETS, SAMPLES, BUY TECHNICAL INFORMATION APPLICATIONS DESIGN CENTER SUPPORT COMPANY INVESTORS MY F.

Home >> Find products >>

#### **BC237**

NPN Epitaxial Silicon Transistor

#### Contents

- Features
- Product status/pricing/packaging
- Order Samples
- Qualification Support

#### **Features**

#### **Switching and Amplifier Applications**

• Low Noise: BC239

#### back to top

Product status/pricing/packaging

BUY

BUY

Datasheet Download this datasheet



e-mail this datasheet



This page **Print version** 

#### **Related Links**

Request samples

How to order products

**Product Change Notices** (PCNs)

Support

Sales support

Quality and reliability

Design center

| Product  | Product status  | Pb-free Status     | Pricing* | Package type | Leads | Packing method | Package Marking Convention**   |
|----------|-----------------|--------------------|----------|--------------|-------|----------------|--|
| BC237    | Full Production | Full<br>Production | \$0.0473 | <u>TO-92</u> | 3     |                | Line 1: <b>\$Y</b> (Fairchild logo) & <b>Z</b> (Asm. Plant Code) & <b>3</b> (3-Digit Date Code) Line 2: BC237                    |
| BC237A   | Full Production | Full<br>Production | \$0.0473 | <u>TO-92</u> | 3     | BULK           | Line 1: <b>\$Y</b> (Fairchild logo)<br>& <b>Z</b> (Asm. Plant Code)<br>& <b>3</b> (3-Digit Date Code)<br>Line 2: BC Line 3: 237A |
| BC237ABU | Full Production | Full<br>Production | \$0.0238 | <u>TO-92</u> | 3     | BULK           | Line 1: BC237 Line 2: A Line 3: -&3  |
| BC237ATA | Full Production |                    | \$0.0238 | <u>TO-92</u> | 3     | АММО           | Line 1: BC237 Line 2: A Line 3: -&3  |

|           |                 | Full<br>Production |          |              |   |           |  |
|-----------|-----------------|--------------------|----------|--------------|---|-----------|--|
| BC237B    | Full Production | Full<br>Production | \$0.0473 | <u>TO-92</u> | 3 | BULK      | Line 1: \$Y (Fairchild logo) &Z (Asm. Plant Code) &3 (3-Digit Date Code) Line 2: BC Line 3: 237B |
| BC237BBU  | Full Production | Full<br>Production | \$0.0238 | <u>TO-92</u> | 3 | BULK      | Line 1: BC237 Line 2: B Line 3: -&3  |
| BC237BTA  | Full Production | Full<br>Production | \$0.0238 | TO-92        | 3 | АММО      | Line 1: BC237 Line 2: B Line 3: -&3  |
| BC237BTAR | Full Production | Full<br>Production | \$0.0238 | TO-92        | 3 | АММО      | Line 1: BC237 Line 2: B Line 3: -&3  |
| BC237BTF  | Full Production | Full<br>Production | \$0.0238 | TO-92        | 3 | TAPE REEL | Line 1: BC237 Line 2: B Line 3: -&3  |
| BC237BTFR | Full Production | Full<br>Production | \$0.0238 | <u>TO-92</u> | 3 | TAPE REEL | Line 1: BC237 Line 2: B Line 3: -&3  |
| BC237BU   | Full Production | Full<br>Production | \$0.0238 | TO-92        | 3 | BULK      | Line 1: BC237 Line 2: B Line 3: -&3  |
| BC237CBU  | Full Production | Full<br>Production | \$0.0238 | <u>TO-92</u> | 3 | BULK      | Line 1: BC237 Line 2: C Line 3: -&3  |
| BC237CTA  | Full Production | Full<br>Production | \$0.0238 | <u>TO-92</u> | 3 | АММО      | Line 1: BC237 Line 2: C Line 3: -&3  |
| BC237TF   | Full Production | Full<br>Production | \$0.0238 | <u>TO-92</u> | 3 | TAPE REEL | <u>Line 1:</u> BC237 <u>Line 3:</u> -&3  |

| BC237TFR | Full Production | Full<br>Production | \$0.0238 | <u>TO-92</u> | 3 | TAPE REEL | <u>Line 1:</u> BC237 <u>Line 3:</u> -&3 |
|----------|-----------------|--------------------|----------|--------------|---|-----------|---|
|----------|-----------------|--------------------|----------|--------------|---|-----------|---|

<sup>\*</sup> Fairchild 1,000 piece Budgetary Pricing
\*\* A sample button will appear if the part is available through Fairchild's on-line samples program. If there is no sample button, please contact a Fairchild distributor to obtain samples



Indicates product with Pb-free second-level interconnect. For more information click here.

Package marking information for product BC237 is available. Click here for more information.

#### back to top

#### **Qualification Support**

Click on a product for detailed qualification data

| Product        |
|----------------|
| BC237          |
| BC237A         |
| BC237ABU       |
| BC237ATA       |
| BC237B         |
| BC237BBU       |
| BC237BTA       |
| BC237BTAR      |
| BC237BTF       |
| BC237BTFR      |
| <u>BC237BU</u> |
| BC237CBU       |
| BC237CTA       |
| BC237TF        |
| BC237TFR       |
|                |

back to top



| Products   Design Center   Support   Company News   Investors   My Fairchild   Contact Us   Site Index   Privacy Policy   Site Terms & Condition | ons   Standard Terms & Conditions |
|--|-----------------------------------|
|  |                                   |
|  |                                   |
|  |                                   |
|  |                                   |
|  |                                   |
|  |                                   |
|  |                                   |
|  |                                   |
|  |                                   |
|  |                                   |
|  |                                   |
|  |                                   |
|  |                                   |