

# AMT128503

## 1.25 Gb/s Integrated 850 nm MSM-TIA


Data Sheet - Rev 1

### FEATURES

- 1.25 Gb/s Differential Output TIA
- 3.3V Operation
- Automatic Gain Control
- 850nm Photodetector with 100  $\mu\text{m}$  x 100  $\mu\text{m}$  Active Area
- Integrated MSM detector & TIA
- TO-46 Ultra Flat Window or Lens Package
- TO-56 Ultra Flat Window Package

### APPLICATIONS

- Gigabit Ethernet (1.250Gb/s)
- Fibre Channel (1.0625 Gb/s)

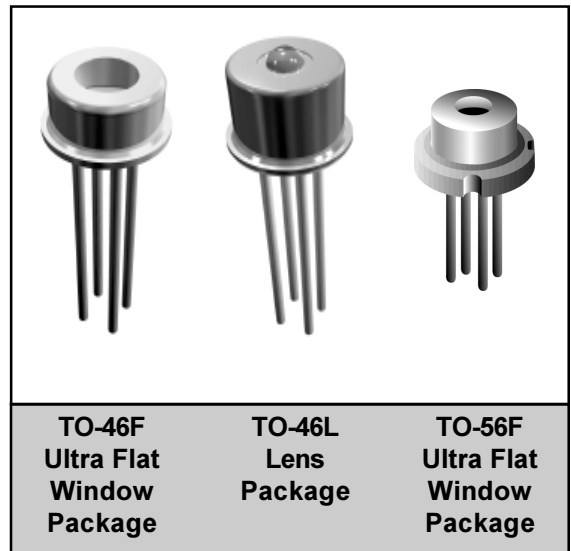

### PRODUCT DESCRIPTION

The ANADIGICS AMT128503 is a 3.3V monolithically integrated Metal-Semiconductor-Metal (MSM) photodetector and transimpedance amplifier (TIA) used to convert an 850nm input optical signal into a differential output voltage, and is manufactured in ANADIGICS' 6" GaAs wafer fabrication facility. The integrated MSM and TIA receiver maximizes the receiver performance by minimizing the photodetector input parasitics to the TIA and

internally biasing the photodetector to achieve high sensitivity, bandwidth and overload performance. As an integrated product the reliability is inherently better than a discrete solution, and both the MSM-TIA integrated circuit and TO46 flat window, TO46 lens and TO56 flat window packaged receiver pass stringent reliability requirements. These products are readily designed into receivers and transceivers for Gigabit Ethernet and Fibre Channel applications.

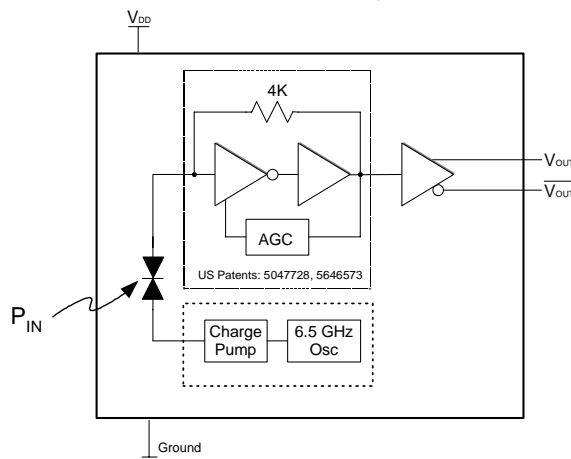


Figure 1: AMT128503 Equivalent Circuit




Figure 2: T46F/T46L Pin Outline (Bottom View)




Figure 3: T56 Pin Outline (Bottom View)

Table 1: Package Pin Description

PIN	T46F/T46L Description	T56F Description
1	VOUT - TIA Output Voltage (non-inverted) Logical '1' with optical input	VDD - Positive Supply Voltage
2	VDD - Positive Supply Voltage	$\overline{\text{VOUT}}$ - TIA Output Voltage (inverted) Logical "1" with optical input
3	$\overline{\text{VOUT}}$ - TIA Output Voltage (inverted) Logical '0' with optical input	Ground (case is grounded)
4	Ground (case is grounded)	VOUT - TIA Output Voltage (non-inverted) Logical "1" with optical input

## ELECTRICAL CHARACTERISTICS

Table 2: Absolute Maximum Ratings

$V_{DD}$	6.0 V
$P_{IN}$	+ 5 dBm
$T_S$	Storage Temp. - 65 °C to 125 °C

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

Table 3: Electrical Characteristics

PARAMETER	MIN	TYP	MAX	UNIT
Wavelength ( $\lambda$ )	770	850	860	nm
Detector Active Area		100 x 100		$\mu\text{m}$
Small Signal Differential Responsivity <sup>(1)</sup> (@ 50 MHz)	1000			V / W
Bandwidth <sup>(1)</sup>	1000		1500	MHz
Low Frequency Cutoff		300	1000	kHz
Output Resistance	25	40	60	$\Omega$
Optical Overload <sup>(2)</sup>	0			dBm
Optical Sensitivity <sup>(2)</sup>	-20	- 22		dBm
Differential Output Voltage <sup>(3), (4)</sup>		700		mV
T <sub>RISE</sub> & T <sub>FALL</sub> (20 - 80%) <sup>(3), (4)</sup>		260		ps
Duty Cycle Distortion <sup>(3), (5)</sup>		4	10	%
RMS Jitter <sup>(3), (5), (6)</sup>		15		ps
Total Jitter (pk-pk) <sup>(3), (5), (7)</sup>		90		ps
Supply Current			55	mA
Operating Voltage Range	+ 3.0	+3.3	+3.6	V
Operating Ambient Temperature Range	0		70	$^{\circ}\text{C}$

## Notes:

- (1) Measured at  $-14$  dBm optical input power with output connected into  $R_L = 100\Omega$  (differential)
- (2) Measured at  $10^{-10}$  BER with a  $2^7-1$  PRBS at 1.25 GB/s
- (3) Input optical power =  $-3$  dBm,  $R_L = 100 \Omega$  (differential).
- (4) Measured with a 625 MHz, 50% duty cycle square wave.
- (5) Measured with a 1.25 Gb/s,  $2^7-1$  PRBS.
- (6)  $1\sigma$  about the center eye crossing.
- (7)  $6\sigma$  about the center eye crossing.

PERFORMANCE DATA

Figure 4: Eye Diagram with an Optical Input Power of -17dBm

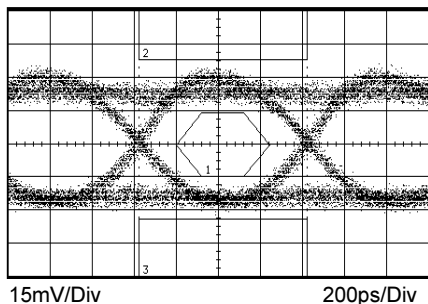


Figure 5: Eye Diagram with an Optical Input Power of -1.0dBm

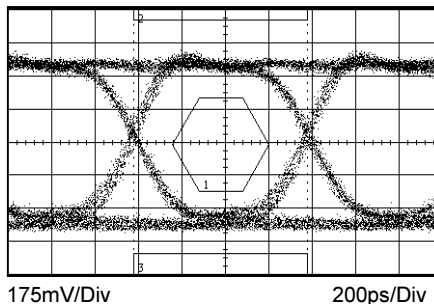


Figure 6: Supply Current vs Temperature

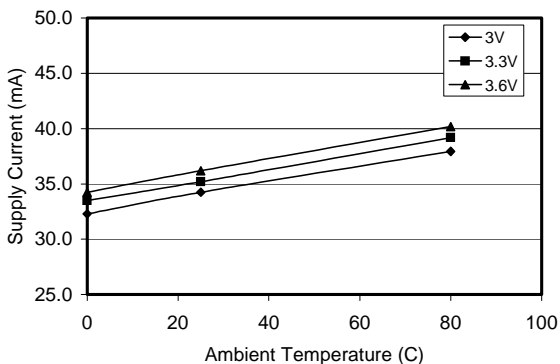


Figure 7: Bandwidth vs. Temperature

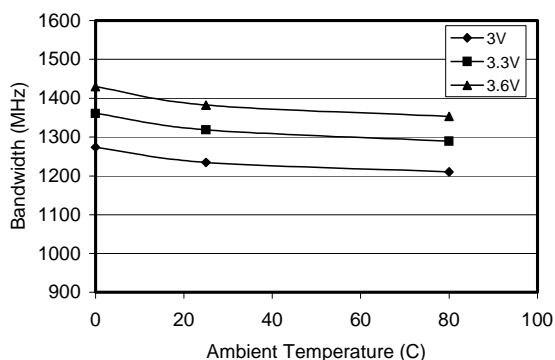


Figure 8: Differential Responsivity vs Temperature


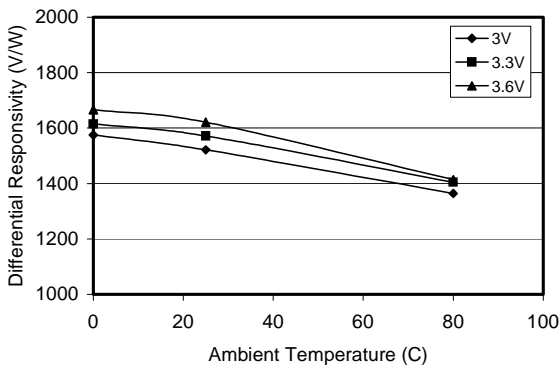


Figure 9: Sensitivity vs Temperature

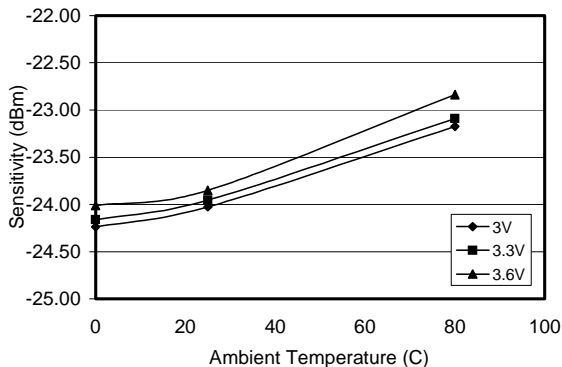

MEASUREMENT METHODS

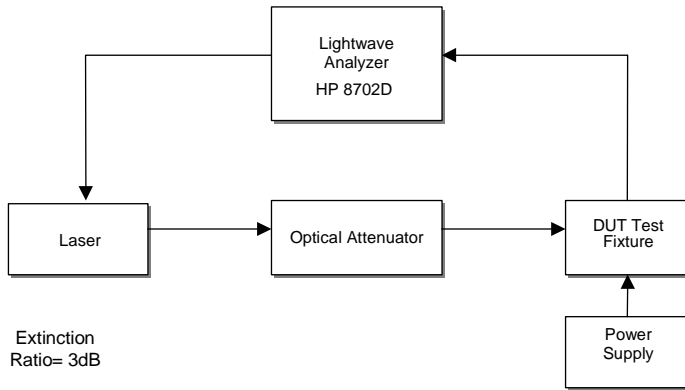


Figure 10: Test Setup for Frequency Response

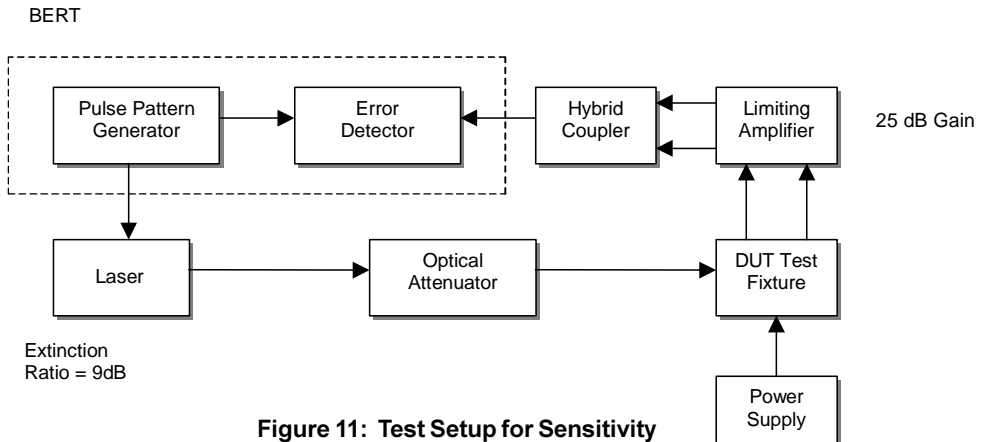


Figure 11: Test Setup for Sensitivity

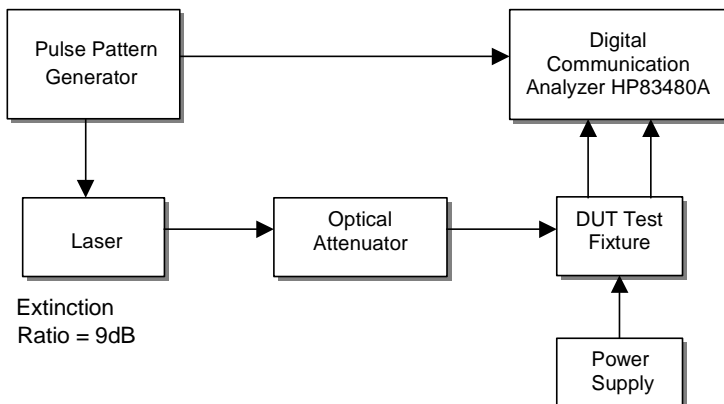


Figure 12: Test Setup for Eye Measurements

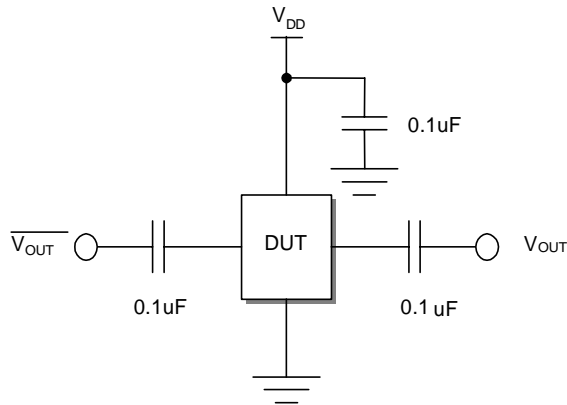


Figure 13: DUT Test Fixture Schematic

APPLICATION INFORMATION

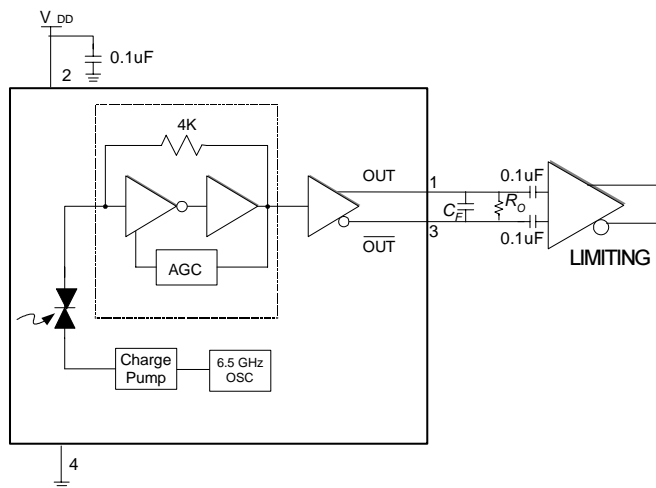


Figure 14: Application Schematic

$C_F$  is an optional single pole noise filter

$$C_F = \frac{1}{2\pi f_c R}$$

$f_c$  is the desired cutoff frequency

$$R = 50 \Omega$$

$R_O$  is required with high input resistance limiting amplifiers

$$R_O = 100 \Omega$$

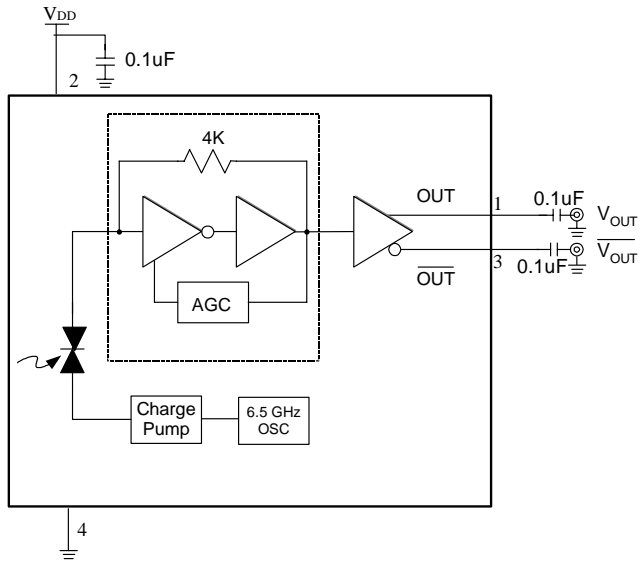


Figure 15: Evaluation Board Schematic


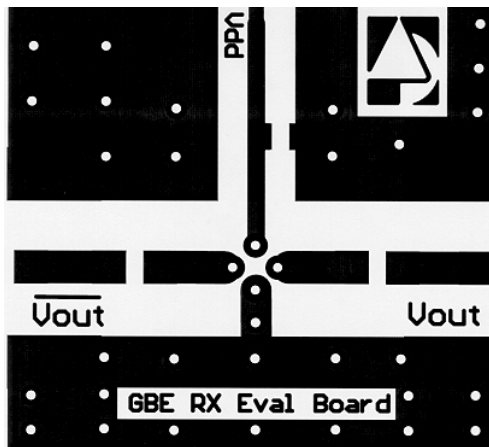


Figure 16: Evaluation Board Layout

PACKAGE OUTLINE

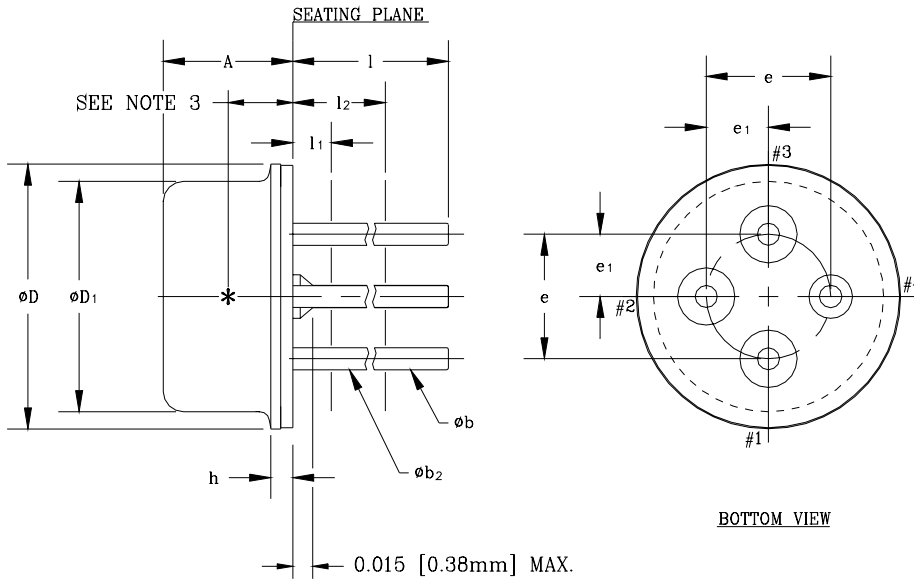

MM CONTROLLING DIMENSIONS


S <sub>M</sub> B <sub>OL</sub>	INCHES		MILLIMETERS		NOTE
	MIN.	MAX.	MIN.	MAX.	
A	0.098	0.110	2.50	2.80	
øb	0.016	0.020	0.41	0.51	1
øb <sub>2</sub>	0.012	0.019	0.30	0.48	1
øD	0.212	0.218	5.38	5.54	
øD <sub>1</sub>	0.181	0.187	4.60	4.75	
e	0.100 T.P.		2.54 T.P.		2
e <sub>1</sub>	0.050 T.P.		1.27 T.P.		2
h	0.014	0.022	0.36	0.56	
l	0.500	0.540	12.70	13.70	1
l <sub>1</sub>	-	0.050	-	1.27	1
l <sub>2</sub>	0.250	-	6.35	-	1

NOTES:

1. (FOUR LEADS) øb<sub>2</sub> APPLIES BETWEEN l<sub>1</sub> AND l<sub>2</sub>. øb APPLIES BETWEEN l<sub>2</sub> AND 0.5 [12.70mm] FROM SEATING PLANE. DIAMETER IS UNCONTROLLED IN l<sub>1</sub> AND BEYOND 0.5 [12.70mm] TO END OF PIN.
2. MAXIMUM DIAMETER LEADS AT A GAGING PLANE 0.054 [1.37mm]+0.001 [0.025mm] -0.000 [0.000mm] BELOW SEATING PLANE TO BE WITHIN 0.007 [0.178mm] OF THEIR TRUE POSITION RELATIVE TO MAXIMUM-WIDTH TAB AND TO THE MAXIMUM 0.212 [5.40mm] DIAMETER MEASURED WITH A SUITABLE GAGE. WHEN GAGE IS NOT USED, MEASUREMENT WILL BE MADE AT 0.250 [6.35mm] FROM SEATING PLANE.
3. INTERNAL OPTICAL HEIGHT = 0.052±0.003[1.31±.08]
4. BENT LEADS SHOULD NOT EXTEND OUTSIDE DIAMETER (øD) OF CAP OR TOUCH EACH OTHER.
5. ALL DIMENSIONS ARE REFERENCE ONLY-EXCEPT A, D & h.
6. DETECTOR DIODE PLACEMENT ACCURACY: ±0.15MM[0.006] WITH RESPECT TO CENTER OF HEADER.(REF.ONLY)

Figure 17: T46F Package Outline Diagram



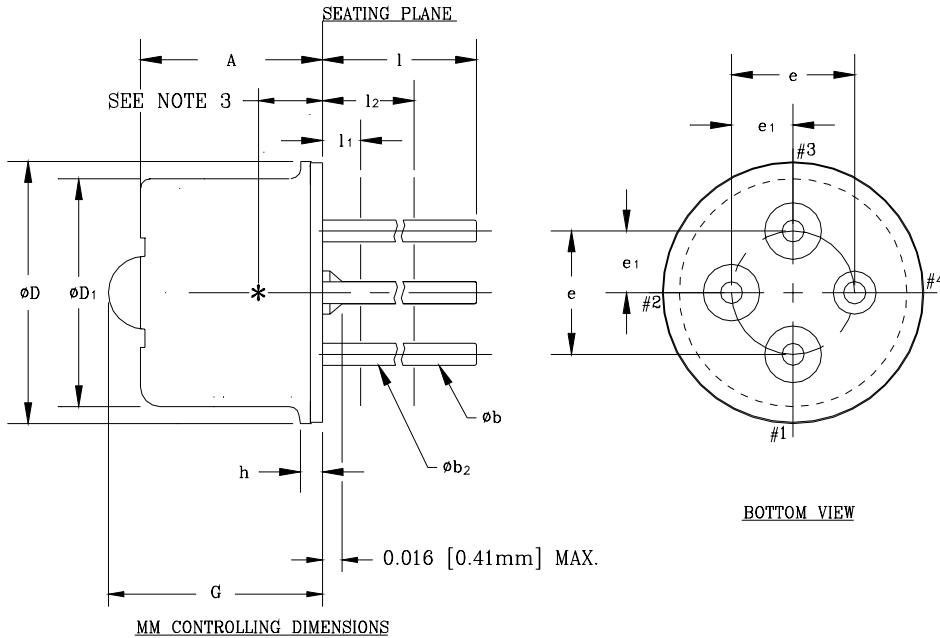


SYMBOL	INCHES		MILLIMETERS		NOTE
	MIN.	MAX.	MIN.	MAX.	
A	--	0.160	--	4.00	
$\phi b$	0.016	0.020	0.41	0.51	1
$\phi b_2$	0.012	0.019	0.30	0.48	1
$\phi D$	0.212	0.218	5.38	5.54	
$\phi D_1$	0.181	0.187	4.60	4.75	
e	0.100 T.P.		2.54 T.P.		2
e1	0.050 T.P.		1.27 T.P.		2
h	0.014	0.022	0.36	0.56	
l	0.500	0.540	12.70	13.70	1
l1	--	0.050	--	1.27	1
l2	0.250	--	6.35	--	1
G	--	0.190	--	4.66	7

**NOTES:**

- (FOUR LEADS)  $\phi b_2$  APPLIES BETWEEN  $l_1$  AND  $l_2$ .  $\phi b$  APPLIES BETWEEN  $l_2$  AND 0.5 [12.70mm] FROM SEATING PLANE. DIAMETER IS UNCONTROLLED IN  $l_1$  AND BEYOND 0.5 [12.70mm] TO END OF PIN.
- MAXIMUM DIAMETER LEADS AT A GAGING PLANE 0.054 [1.37mm]+0.001 [0.025mm] -0.000 [0.000mm] BELOW SEATING PLANE TO BE WITHIN 0.007 [0.178mm] OF THEIR TRUE POSITION RELATIVE TO MAXIMUM-WIDTH TAB AND TO THE MAXIMUM 0.212 [5.40mm] DIAMETER MEASURED WITH A SUITABLE GAGE. WHEN GAGE IS NOT USED, MEASUREMENT WILL BE MADE AT 0.250 [6.35mm] FROM SEATING PLANE.
- INTERNAL OPTICAL HEIGHT = 0.052±0.003[1.32±0.08] DIE PLACEMENT ACCURACY FOR REF. ONLY.
- BENT LEADS SHOULD NOT EXTEND OUTSIDE DIAMETER ( $\phi D$ ) OF CAP OR TOUCH EACH OTHER.
- ALL DIMENSIONS ARE REFERENCE ONLY-EXCEPT A, D & h.
- DETECTOR DIODE PLACEMENT ACCURACY:  $\phi \pm 0.15$ MM[0.006] ALL DIRECTIONS
- LENS HEIGHT = 0.65±0.1 [0.026±0.004]

**Figure 18: T46L Package Outline Diagram**

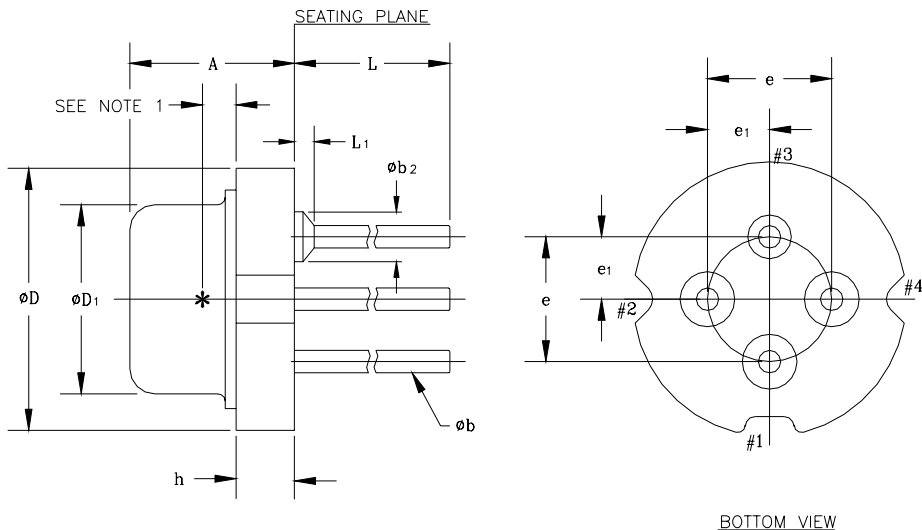

MM CONTROLLING DIMENSIONS

S <sub>M</sub> B <sub>OL</sub>	MILLIMETERS		INCHES		NOTE
	MIN.	MAX.	MIN.	MAX.	
A	3.10	3.50	0.122	0.138	
$\phi b$	0.41	0.48	0.016	0.019	
$\phi b_2$	-	0.89	-	0.035	
$\phi D$	5.57	5.60	0.219	0.221	
$\phi D_1$	3.80	3.90	0.150	0.154	
e	2.54 T.P.		0.100 T.P.		
e <sub>1</sub>	1.27 T.P.		0.050 T.P.		
h	1.10	1.30	0.043	0.051	
L	6.00	7.00	0.236	0.276	
L <sub>1</sub>	-	0.38	-	0.015	

NOTES:

1. INTERNAL OPTICAL HEIGHT =  $0.70 \pm 0.04 [0.028 \pm 0.0015]$
2. BENT LEADS SHOULD NOT EXTEND OUTSIDE DIAMETER ( $\phi D$ ) OF CAP OR TOUCH EACH OTHER.
3. ALL DIMENSIONS ARE REFERENCE ONLY, EXCEPT A,  $\phi D$  & h.
4. DETECTOR DIODE PLACEMENT ACCURACY:  $\pm 0.15\text{MM} [0.006]$  WITH RESPECT TO CENTER OF HEADER: REFERENCE ONLY.
5. CAN PLACEMENT ACCURACY:  $\pm 0.2\text{MM} [0.008]$  WITH RESPECT TO CENTER OF HEADER: REFERENCE ONLY.

Figure 19: T56F Package Outline Diagram

NOTES

## ORDERING INFORMATION

Part Number	Package Option	Package Description
AMT128503T46F	TO-46F	Ultra Flat Window
AMT128503T46L	TO-46L	Lens
AMT128503T56F	TO-56F	Ultra Flat Window

**ANADIGICS, Inc.**

141 Mount Bethel Road

Warren, New Jersey 07059, U.S.A

Tel: +1 (908) 668-5000

Fax: +1 (908) 668-5132

<http://www.anadigics.com>[Mktg@anadigics.com](mailto:Mktg@anadigics.com)**IMPORTANT NOTICE**

ANADIGICS, Inc. reserves the right to make changes to its products or to discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data Sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibilities for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

**WARNING**

ANADIGICS products are not intended for use in life support appliances, devices, or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.