

KSP92/93

High Voltage Transistor



PNP Epitaxial Silicon Transistor

Absolute Maximum Ratings T_a=25°C unless otherwise noted

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage		
020	: KSP92	-300	V
	: KSP93	-200	V
V _{CEO}	Collector-Emitter Voltage		
020	: KSP92	-300	V
	: KSP93	-200	V
V _{EBO}	Emitter-Base Voltage	-5	V
I _C	Collector Current	-500	mA
P _C	Collector Power Dissipation (T _a =25°C)	625	mW
	Derate above 25°C	5	mW/°C
P _C	Collector Power Dissipation (T _C =25°C)	1.5	W
	Derate above 25°C	12	mW/°C
TJ	Junction Temperature	150	°C
T _{STG}	Storage Temperature	-55 ~ 150	°C

Electrical Characteristics T_a =25°C unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Max.	Units
BV _{CBO}	Collector-Base Breakdown Voltage : KSP92 : KSP93	I _C = -100μA, I _E =0	-300 -200		V V
BV _{CEO}	* Collector-Emitter Breakdown Voltage : KSP92 : KSP93	I _C = -1mA, I _B =0	-300 -200		V
BV _{EBO}	Emitter-Base Breakdown Voltage	I _E = -100μA, I _C =0	-5		V
I _{CBO}	Collector Cur-off Current : KSP92 : KSP93	V _{CB} = -200V, I _E =0 V _{CB} = -160V, I _E =0		-0.25 -0.25	μA μA
I _{EBO}	Emitter Cut-off Current	V _{EB} = -3V, I _C =0		-0.10	μΑ
h _{FE}	* DC Current Gain	V_{CE} = -10V, I_{CE} = -1mA V_{CE} = -10V, I_{CE} = -10mA V_{CE} = -10V, I_{CE} = -30mA	25 40 25		
V _{CE} (sat)	*Collector-Emitter Saturation Voltage	I _C = -20mA, I _B = -2mA		-0.50	V
V _{BE} (sat)	* Base-Emitter Saturation Voltage	I _C = -20mA, I _B = -2mA		-0.90	V
f _T	Current Gain Bandwidth Product	V _{CE} = -20V, I _C = -10mA, f=100MHz	50		MHz
C _{ob}	Output Capacitance : KSP92 : KSP93	V _{CB} = -20V, I _E =0 f=1MHz		6 8	pF pF

* Pulse Test: PW≤300μs, Duty Cycle≤2%

Typical Characteristics

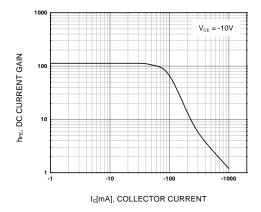


Figure 1. DC current Gain

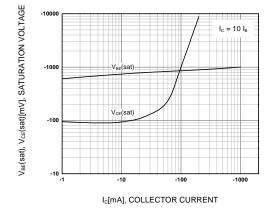


Figure 2. Saturation Voltage

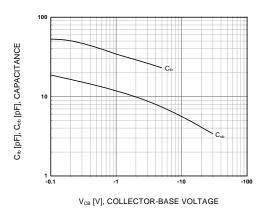


Figure 3. Capacitance

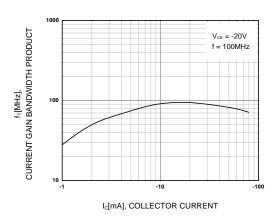


Figure 4. Current Gain Bandwidth Product



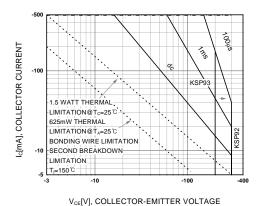



Figure 5. Active-Regio Safe Operating Area

©2001 Fairchild Semiconductor Corporation Rev. A1, July 2001

TO-92

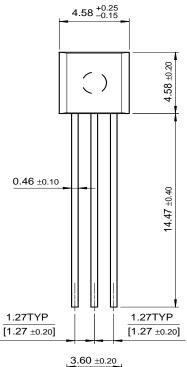

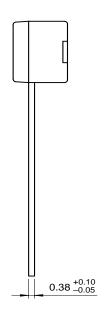



TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FAST [®]	OPTOPLANAR™	STAR*POWER™
Bottomless™	FASTr™	PACMAN™	Stealth™
CoolFET™	FRFET™	POP™	SuperSOT™-3
CROSSVOLT™	GlobalOptoisolator™	Power247™	SuperSOT™-6
DenseTrench™	GTO™	PowerTrench [®]	SuperSOT™-8
DOME™	HiSeC™	QFET™	SyncFET™
EcoSPARK™	ISOPLANAR™	QS™	TruTranslation™
E ² CMOS™	LittleFET™	QT Optoelectronics™	TinyLogic™
EnSigna™	MicroFET™	Quiet Series™	UHC™
FACT™	MICROWIRE™	SLIENT SWITCHER®	UltraFET [®]
FACT Quiet Series™	OPTOLOGIC™	SMART START™	VCX™

STAR*POWER is used under license

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:


- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.


PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

©2001 Fairchild Semiconductor Corporation Rev. H

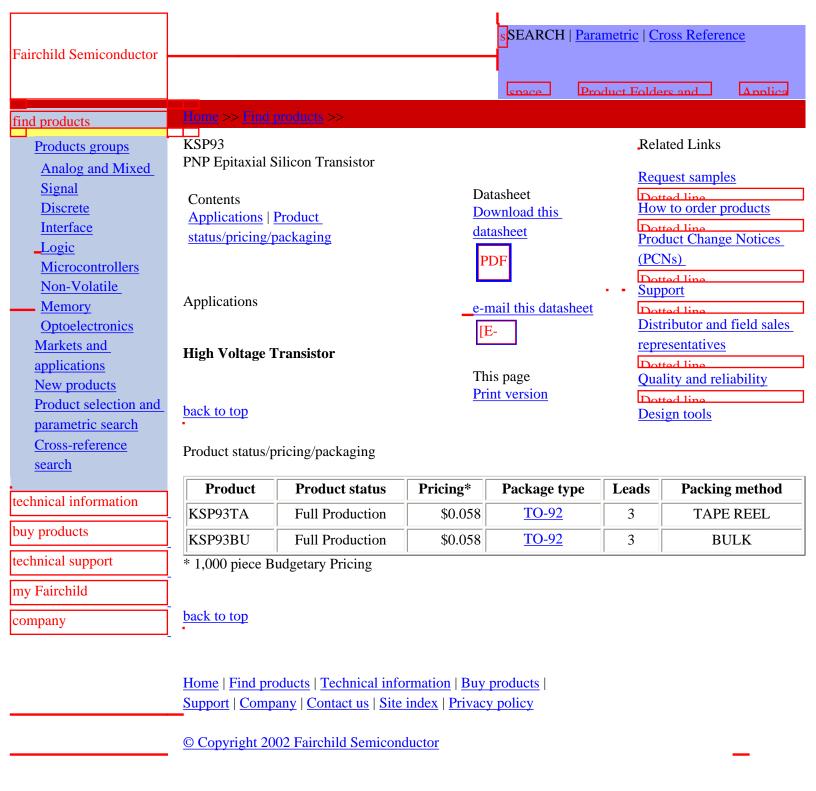

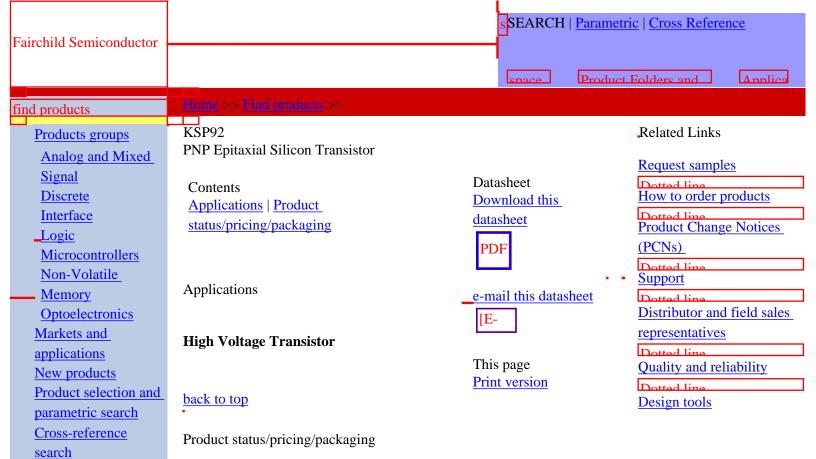

technical information

buy products

technical support

my Fairchild

company

Product	Product status	Pricing*	Package type	Leads	Packing method
KSP92ATA	Full Production	\$0.058	<u>TO-92</u>	3	TAPE REEL
KSP92TA	Full Production	\$0.058	<u>TO-92</u>	3	TAPE REEL
KSP92ABU	Full Production	\$0.058	<u>TO-92</u>	3	BULK
KSP92H1TA	Full Production	\$0.058	<u>TO-92</u>	3	TAPE REEL
KSP92BU	Full Production	\$0.058	<u>TO-92</u>	3	BULK

^{* 1,000} piece Budgetary Pricing

back to top

<u>Home</u> | <u>Find products</u> | <u>Technical information</u> | <u>Buy products</u> | <u>Support</u> | <u>Company</u> | <u>Contact us</u> | <u>Site index</u> | <u>Privacy policy</u>

© Copyright 2002 Fairchild Semiconductor