

KSC945

Audio Frequency Amplifier & High Frequency OSC.

- Complement to KSA733
- Collector-Base Voltage : V_{CBO}=60V
- High Current Gain Bandwidth Product : f_T=300MHz (TYP)
- Suffix "-C" means Center Collector (1. Emitter 2. Collector 3. Base)



NPN Epitaxial Silicon Transistor

Absolute Maximum Ratings T_a=25°C unless otherwise noted

Symbol	Parameter	Value	Units
V _{CBO}	Collector-Base Voltage	60	V
V _{CEO}	Collector-Emitter Voltage	50	V
V _{EBO}	Emitter-Base Voltage	5	V
I _C	Collector Current	150	mA
P _C	Collector Power Dissipation	250	mW
T _J	Junction Temperature	150	°C
T _{STG}	Storage Temperature	-55 ~ 150	°C

Electrical Characteristics T_a=25°C unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Units
BV _{CBO}	Collector-Base Breakdown Voltage	I _C =100μA, I _E =0	60			V
BV _{CEO}	Collector-Emitter Breakdown Voltage	I _C =10mA, I _B =0	50			V
BV _{EBO}	Emitter-Base Breakdown Voltage	$I_E=10\mu A, I_C=0$	5			V
I _{CBO}	Collector Cut-off Current	V_{CB} =40V, I_{E} =0			0.1	μΑ
I _{EBO}	Emitter Cut-off Current	$V_{EB}=3V$, $I_{C}=0$			0.1	μΑ
h _{FE}	DC Current Gain	$V_{CE}=6V, I_{C}=1.0mA$	40		700	
V _{CE} (sat)	Collector-Emitter Saturation Voltage	I _C =100mA, I _B =10mA		0.15	0.3	V
f _T	Current Gain Bandwidth Product	V _{CE} =6V, I _C =10mA		300		MHz
C _{ob}	Output Capacitance	V _{CB} =6V, I _E =0, f=1MHz		2.5		pF
NF	Noise Figure	V_{CE} =6V, I_{C} =0.5mA f=1KHz, R_{S} =500 Ω		4.0		dB

h_{FE} Classification

Classification	R	0	Y	G	L
h _{FE}	40 ~ 80	70 ~ 140	120 ~ 240	200 ~ 400	350 ~ 700

Typical Characteristics




Figure 1. Static Characteristic




Figure 3. DC current Gain




Figure 5. Output Capacitance




Figure 2. Transfer Characteristic




Figure 4. Base-Emitter Saturation Voltage Collector-Emitter Saturation Voltage






Figure 6. Current Gain Bandwidth Product


©2002 Fairchild Semiconductor Corporation Rev. A2, September 2002

Package Dimensions

TO-92

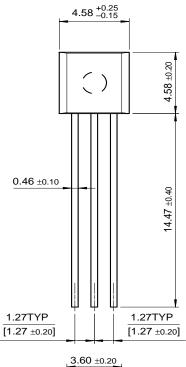





TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FACT™	ImpliedDisconnect™	PACMAN™	SPM™
ActiveArray™	FACT Quiet series™	ISOPLANAR™	POP™	Stealth™
Bottomless™	FAST [®]	LittleFET™	Power247™	SuperSOT™-3
CoolFET™	FASTr™	MicroFET™	PowerTrench [®]	SuperSOT™-6
$CROSSVOLT^{TM}$	FRFET™	MicroPak™	QFET™	SuperSOT™-8
DOME™	GlobalOptoisolator™	MICROWIRE™	QS™	SyncFET™
EcoSPARK™	GTO™	MSX™	QT Optoelectronics™	TinyLogic™
E ² CMOS™	HiSeC™	MSXPro™	Quiet Series™	TruTranslation™
EnSigna™	I^2C^{TM}	OCX^{TM}	RapidConfigure™	UHC™
Across the board.	Around the world.™	OCXPro™	RapidConnect™	UltraFET [®]
The Power Franci	hise™	OPTOLOGIC [®]	SILENT SWITCHER®	VCX TM
Programmable Ad	ctive Droop™	OPTOPLANAR™	SMART START™	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

Search:

Go

Models

• High Current Gain Bandwidth Product : f_T=300MHz (TYP.)

• Suffix "-C" means Center Collector (1. Emitter 2. Collector 3. Base)

Application notes

(PCNs)

Support

Sales support

Design center

Quality and reliability

Related Links

Request samples

How to order products

Product Change Notices

Home >> Find products >>

KSC945

NPN Epitaxial Silicon Transistor

Contents

Features

Features

- Applications
- Product status/pricing/packaging
 Qualification Support

Complement to KSA733

• Collector-Base Voltage : V_{CBO}= 60V

Order Samples

Datasheet





This page Print version

BUY

Download this



e-mail this datasheet



back to top

Applications

Audio Frequency Amplifier & High Frequency OSC.

back to top

Product status/pricing/packaging

BUY

Product	Product status	Pb-free Status	Pricing*	Package type	Leads	Packing method	Package Marking Convention**
KSC945CGBU	Full Production	Full Production	\$0.0255	<u>TO-92</u>	3	BULK	<u>Line 1:</u> C945 <u>Line 3:</u> GC&3
KSC945CGTA	Full Production		\$0.0265	TO-92	3	AMMO	Line 1: C945 Line 3: GC&3

		Full Production					
KSC945CLTA	Full Production	Full Production	\$0.025	<u>TO-92</u>	3	АММО	<u>Line 1:</u> C945 <u>Line 3:</u> LC&3
KSC945COTA	Full Production	Full Production	\$0.025	<u>TO-92</u>	3	АММО	Line 1: C945 Line 3: OC&3
KSC945CYBU	Full Production	Full Production	\$0.0255	<u>TO-92</u>	3	BULK	Line 1: C945 Line 3: YC&3
KSC945CYTA	Full Production	Full Production	\$0.0265	<u>TO-92</u>	3	АММО	Line 1: C945 Line 3: YC&3
KSC945CYTA_NL	Full Production	Full Production	N/A	<u>TO-92</u>	3	АММО	Line 1: C945 Line 3: YC&3
KSC945GBU	Full Production	Full Production	\$0.0255	<u>TO-92</u>	3	BULK	Line 1: C945 Line 3: G-&3
KSC945GTA	Full Production	Full Production	\$0.0265	<u>TO-92</u>	3	АММО	Line 1: C945 Line 3: G-&3
KSC945LBU	Full Production	Full Production	\$0.0255	<u>TO-92</u>	3	BULK	Line 1: C945 Line 3: L-&3
KSC945LTA	Full Production	Full Production	\$0.0265	<u>TO-92</u>	3	AMMO	Line 1: C945 Line 3: L-&3
KSC945OBU	Full Production	Full Production	\$0.0255	<u>TO-92</u>	3	BULK	<u>Line 1:</u> C945 <u>Line 3:</u> O-&3

KSC945OTA	Full Production	Full Production	\$0.0265	<u>TO-92</u>	3	АММО	<u>Line 1:</u> C945 <u>Line 3:</u> O-&3
KSC945YBU	Full Production	Full Production	\$0.0255	<u>TO-92</u>	3	BULK	Line 1: C945 Line 3: Y-&3
KSC945YTA	Full Production	Full Production	\$0.0265	<u>TO-92</u>	3	AMMO	Line 1: C945 Line 3: Y-&3
KSC945YTA_NL	Full Production	Full Production	N/A	<u>TO-92</u>	3	AMMO	Line 1: C945 Line 3: Y-&3

^{*} Fairchild 1,000 piece Budgetary Pricing

^{**} A sample button will appear if the part is available through Fairchild's on-line samples program. If there is no sample button, please contact a Fairchild distributor to obtain samples



Indicates product with Pb-free second-level interconnect. For more information click here.

Package marking information for product KSC945 is available. Click here for more information.

back to top

Models

Package & leads	Condition	Temperature range	Vcc range	Software version	Revision date
		PSPICE			
TO-92-3	Electrical/Thermal	-55°C to 150°C	0V to 20V	9.2	Jan 15, 2004

back to top

Application notes

AB-35: CRT Monitors (150 K) Jul 27, 2007

AB-38: Color TV Applications (134 K) Jul 27, 2007

AB-39: Color TV Applications (141 K) Jul 27, 2007

AB-40: Color TV Applications (143 K) Jul 27, 2007

AB-41: Color TV Applications (141 K) Jul 27, 2007

AB-42: Color TV Applications (142 K) Jul 27, 2007

AB-43: Color TV Applications (143 K) Jul 27, 2007

AB-57: Color-TV Applications (FSCQ565RT - 59 Watts) (253 K) Jul 27, 2007

AB-58: Color-TV Applications (FSCQ765RT - 83 Watts) (266 K) Jul 27, 2007 AB-59: Color-TV Applications (FSCQ965RT - 102 Watts) (240 K) Jul 27, 2007 AB-60: Color-TV Applications (FSCQ1265RT - 132 Watts) (246 K) Jul 27, 2007 AB-61: Color-TV Applications (FSCQ1465RT - 146 Watts) (245 K) Jul 27, 2007 AB-62: Color-TV Applications (FSCQ1565RT - 160 Watts) (231 K) Jul 27, 2007 AB-63: Color-TV Applications (FSCQ1565RP - 198 Watts) (232 K) Jul 27, 2007 AN-4116: A Fairchild Power Switch (FPS) based on Switched Mode Power Supply for LCD Monitor Use (245 K) Jul 27, 2007 AN-4146: Design Guidelines for Quasi-Resonant Converters Using FSCQseries Fairchild Power Switch (FPStm) (370 K) Jul 27, 2007 AN-4149: Design Guidelines for Quasi-Resonant Converters Using KA5Qseries Fairchild Power Switch (FPStm) (307 K) Jul 27, 2007

back to top

Qualification Support

Click on a product for detailed qualification data

Product
KSC945CGBU
KSC945CGTA
KSC945CLTA
KSC945COTA
KSC945CYBU
KSC945CYTA
KSC945CYTA_NL
KSC945GBU
KSC945GTA
KSC945LBU
KSC945LTA
KSC945OBU
KSC945OTA
KSC945YBU
KSC945YTA
KSC945YTA_NL

back to top

© 2007 Fairchild Semiconductor



Products | Design Center | Support | Company News | Investors | My Fairchild | Contact Us | Site Index | Privacy Policy | Site Terms & Conditions | Standard Terms & Conditions |