

KSC1393

TV VHF Tuner RF Amplifier (Forward AGC)

- High Current Gain Bandwidth Product : f_T=700MHz (TYP.)
- Low Noise Figure : NF=3.0dB (MAX.) at f=200MHz
- Low Reverse Transfer Capacitance : C_{RE}=0.5pF (MAX.)



NPN Epitaxial Silicon Transistor

Absolute Maximum Ratings T_a =25°C unless otherwise noted

Symbol	Parameter	Ratings	Units
V _{CBO}	Collector-Base Voltage	30	V
V _{CEO}	Collector-Emitter Voltage	30	V
V _{EBO}	Emitter-Base Voltage	4	V
I _C	Collector Current	20	mA
P _C	Collector Power Dissipation	250	mW
T _J	Junction Temperature	150	°C
T _{STG}	Storage Temperature	-55 ~ 150	°C

Electrical Characteristics T_a=25°C unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Units
BV _{CBO}	Collector-Base Breakdown Voltage	I _C =10μA, I _E =0	30			V
BV _{CEO}	Collector-Emitter Breakdown Voltage	I _C =5mA, I _B =0	30			V
BV _{EBO}	Emitter-Base Breakdown Voltage	I _E =10μA, I _C =0	4			V
I _{CBO}	Collector Cut-off Current	V _{CB} =20V, I _E =0			0.1	μΑ
h _{FE}	DC Current Gain	V _{CE} =10V, I _C =2mA	40		180	
f _T	Current Gain Bandwidth Product	V _{CE} =10V, I _C =3mA	400	700		MHz
C _{RE}	Reverse Transfer Capacitance	V _{CB} =10V, I _E =0, f=1MHz		0.35	0.5	pF
G _{PE}	Power Gain	V _{CE} =10V, I _C =3mA f=200MHz	20	24		dB
I _{AGC}	AGC Current	I_E at G_R = -30dB, f=200MHz		-10	-12	mA
NF	Noise Figure	V _{CE} =10V, I _C = 3mA f=200MHz		2.0	3.0	dB

h_{FE} Classification

Classification	R	0	Y
h _{FE}	40 ~ 80	60 ~ 140	90 ~ 180

Typical Characteristics




Figure 1. Static Characteristic




Figure 2. DC current Gain




Figure 3. Base-Emitter Saturation Voltage Collector-Emitter Saturation Voltage

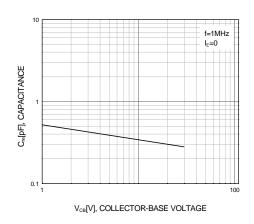


Figure 4. Reverse Capacitance

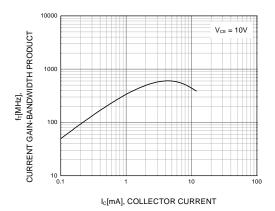



Figure 5. Current Gain Bandwidth Product


©2002 Fairchild Semiconductor Corporation Rev. B1, September 2002


KSC1393

Package Dimensions

TO-92

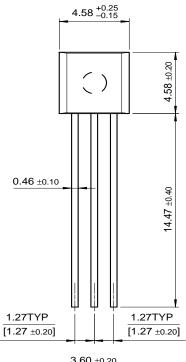

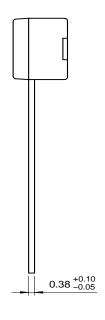



TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FACT™	ImpliedDisconnect™	PACMAN™	SPM™
ActiveArray™	FACT Quiet series™	ISOPLANAR™	POP™	Stealth™
Bottomless™	FAST [®]	LittleFET™	Power247™	SuperSOT™-3
CoolFET™	FASTr™	MicroFET™	PowerTrench [®]	SuperSOT™-6
$CROSSVOLT^{TM}$	FRFET™	MicroPak™	QFET™	SuperSOT™-8
DOME™	GlobalOptoisolator™	MICROWIRE™	QS™	SyncFET™
EcoSPARK™	GTO™	MSX™	QT Optoelectronics™	TinyLogic™
E ² CMOS™	HiSeC™	MSXPro™	Quiet Series™	TruTranslation™
EnSigna™	I^2C^{TM}	OCX^{TM}	RapidConfigure™	UHC™
Across the board. Around the world.™		OCXPro™	RapidConnect™	UltraFET [®]
The Power Franchise™		OPTOLOGIC [®]	SILENT SWITCHER®	VCX TM
Programmable Active Droop™		OPTOPLANAR™	SMART START™	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

Search:

Go

Home >> Find products >>

KSC1393

NPN Epitaxial Silicon Transistor

Contents

Features

Qualification Support

- Applications
- Product status/pricing/packaging
- Order Samples

Features

- High Current Gain Bandwidth Product f_T=700MHz(TYP.)
- Low Noise Figure: NF= 3.0dB (MAX.) at f=200MHz
- Low Reverse Transfer Capacitance : C_{RF} =0.5pF (MAX.)

BUY

Datasheet Download this datasheet



e-mail this datasheet



This page Print version

Related Links

Request samples

How to order products

Product Change Notices (PCNs)

Support

Sales support

Quality and reliability

Design center

back to top

Applications

TV VHF Tuner RF Amplifier (Forward AGC)

back to top

Product status/pricing/packaging

BUY

Product	Product status	Pb-free Status	Pricing*	Package type	Leads	Packing method	Package Marking Convention**
KSC1393OBU	Full Production	Full Production	\$0.025	<u>TO-92</u>	3	BULK	<u>Line 1:</u> C1393 <u>Line 3:</u> O-&3
KSC1393OTA	Full Production	Full Production	\$0.025	<u>TO-92</u>	3	AMMO	<u>Line 1:</u> C1393 <u>Line 3:</u> O-&3

KSC1393RBU	Full Production	Full Production	\$0.025	<u>TO-92</u>	3	BULK	<u>Line 1:</u> C1393 <u>Line 3:</u> R-&3
KSC1393RTA	Full Production	Full Production	\$0.025	<u>TO-92</u>	3	AMMO	Line 1: C1393 Line 3: R-&3
KSC1393YBU	Full Production	Full Production	\$0.025	<u>TO-92</u>	3	BULK	Line 1: C1393 Line 3: Y-&3
KSC1393YTA	Full Production	Full Production	\$0.025	<u>TO-92</u>	3	AMMO	Line 1: C1393 Line 3: Y-&3

^{*} Fairchild 1,000 piece Budgetary Pricing

** A sample button will appear if the part is available through Fairchild's on-line samples program. If there is no sample button, please contact a Fairchild distributor to obtain samples



Indicates product with Pb-free second-level interconnect. For more information click here.

Package marking information for product KSC1393 is available. Click here for more information .

back to top

Qualification Support

Click on a product for detailed qualification data

Product
KSC1393OBU
KSC1393OTA
KSC1393RBU
KSC1393RTA
KSC1393YBU
KSC1393YTA

back to top



Products Design Center Support Company News Investors My Fairchild Contact Us Site Index Privacy Policy Site Terms & Conditions Standard	itions (