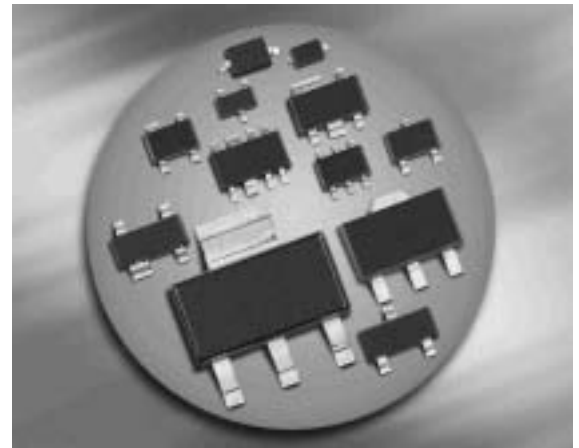



NPN / PNP Silicon Switching Transistor Array

- High current gain
- Low collector-emitter saturation voltage
- Two (galvanic) internal isolated NPN / PNP transistor in one package
- Pb-free (RoHS compliant) package ¹⁾
- Qualified according AEC Q101


**SMBT3904PN
SMBT3904UPN**


Type	Marking	Pin Configuration						Package
		1=E	2=B	3=C	4=E	5=B	6=C	
SMBT3904PN	s3P	1=E	2=B	3=C	4=E	5=B	6=C	SOT363
SMBT3904UPN	s3P	1=E	2=B	3=C	4=E	5=B	6=C	SC74

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	40	V
Collector-base voltage	V_{CBO}	40	
Emitter-base voltage	V_{EBO}	6	
Collector current	I_C	200	mA
Total power dissipation- $T_S \leq 115\text{ °C}$, SMBT3904PN $T_S \leq 105\text{ °C}$, SMBT3904UPN	P_{tot}	250 330	mW
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-65 ... 150	

¹Pb-containing package may be available upon special request

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾	R_{thJS}		K/W
SMBT3904PN		≤ 140	
SMBT3904UPN		≤ 135	

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

DC Characteristics

Collector-emitter breakdown voltage $I_C = 1 \text{ mA}, I_B = 0$	$V_{(BR)CEO}$	40	-	-	V
Collector-base breakdown voltage $I_C = 10 \mu\text{A}, I_E = 0$	$V_{(BR)CBO}$	40	-	-	
Emitter-base breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$	$V_{(BR)EBO}$	6	-	-	
Collector-base cutoff current $V_{CB} = 30 \text{ V}, I_E = 0$	I_{CBO}	-	-	50	nA
DC current gain ²⁾ $I_C = 100 \mu\text{A}, V_{CE} = 1 \text{ V}$ $I_C = 1 \text{ mA}, V_{CE} = 1 \text{ V}$ $I_C = 10 \text{ mA}, V_{CE} = 1 \text{ V}$ $I_C = 50 \text{ mA}, V_{CE} = 1 \text{ V}$ $I_C = 100 \text{ mA}, V_{CE} = 1 \text{ V}$	h_{FE}	40 70 100 60 30	- - - - -	- - 300 - -	-
Collector-emitter saturation voltage ²⁾ $I_C = 10 \text{ mA}, I_B = 1 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 5 \text{ mA}$	V_{CEsat}	- -	- -	0.25 0.4	V
Base emitter saturation voltage ²⁾ $I_C = 10 \text{ mA}, I_B = 1 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 5 \text{ mA}$	V_{BEsat}	0.65 -	- -	0.85 0.95	

¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance


²⁾Pulse test: $t < 300 \mu\text{s}$; $D < 2\%$

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Transition frequency $I_C = 10\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 100\text{ MHz}$	f_T	250	-	-	MHz
Collector-base capacitance $V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	C_{cb}	-	-	3.5	pF
Emitter-base capacitance $V_{EB} = 0.5\text{ V}$, $f = 1\text{ MHz}$	C_{eb}	-	-	10	
Delay time $V_{CC} = 3\text{ V}$, $I_C = 10\text{ mA}$, $I_{B1} = 1\text{ mA}$, $V_{BE(\text{off})} = 0.5\text{ V}$	t_d	-	-	35	ns
Rise time $V_{CC} = 3\text{ V}$, $I_C = 10\text{ mA}$, $I_{B1} = 1\text{ mA}$, $V_{BE(\text{off})} = 0.5\text{ V}$	t_r	-	-	35	
Storage time $V_{CC} = 3\text{ V}$, $I_C = 10\text{ mA}$, $I_{B1} = I_{B2} = 1\text{ mA}$	t_{stg}	-	-	225	
Fall time $V_{CC} = 3\text{ V}$, $I_C = 10\text{ mA}$, $I_{B1} = I_{B2} = 1\text{ mA}$	t_f	-	-	75	
Noise figure $I_C = 100\text{ }\mu\text{A}$, $V_{CE} = 5\text{ V}$, $f = 1\text{ kHz}$, $\Delta f = 200\text{ Hz}$, $R_S = 1\text{ k}\Omega$	F	-	-	5	dB


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 10\text{ V}$, normalized

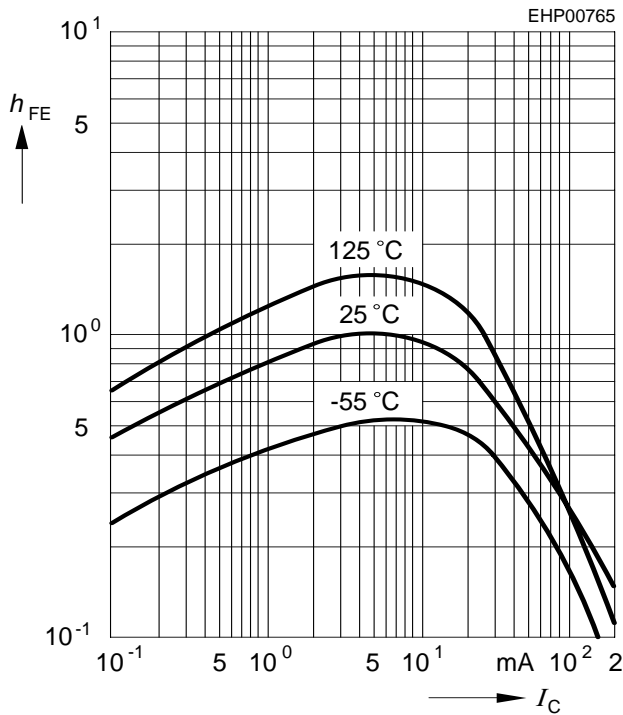


Saturation voltage $I_C = f(V_{BEsat}; V_{CEsat})$

$h_{FE} = 10$

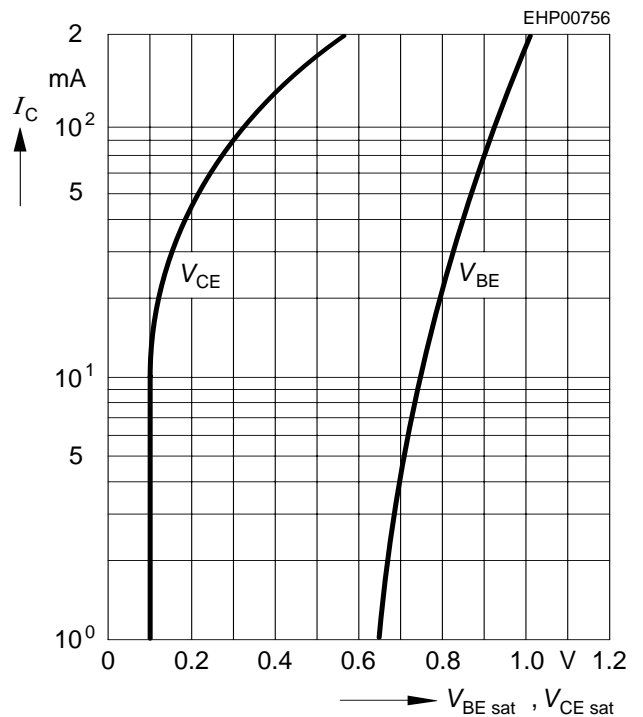


Total power dissipation $P_{tot} = f(T_S)$

SMBT3904PN

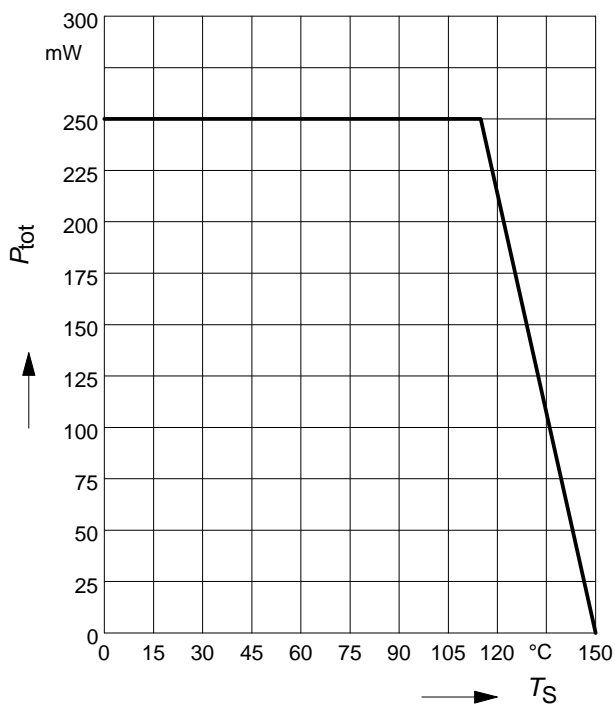


Total power dissipation $P_{tot} = f(T_S)$

SMBT3904UPN

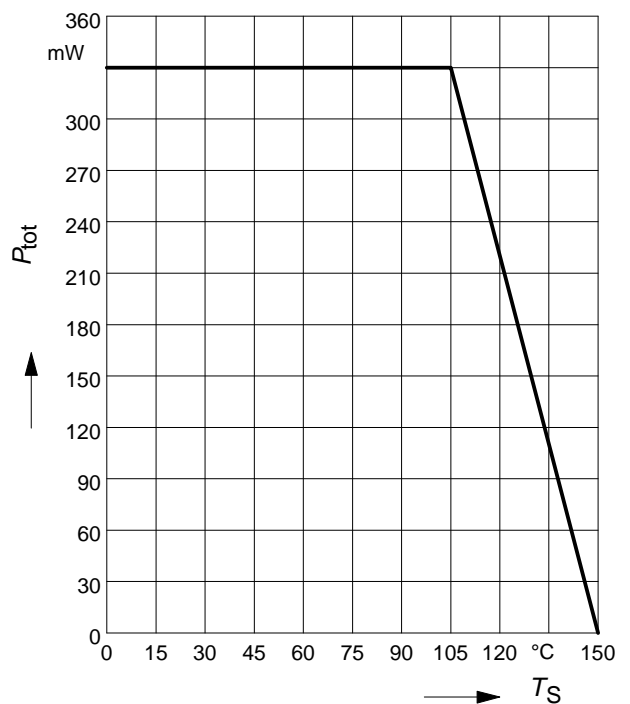

Permissible Pulse Load $R_{thJS} = f(t_p)$


SMBT3904PN

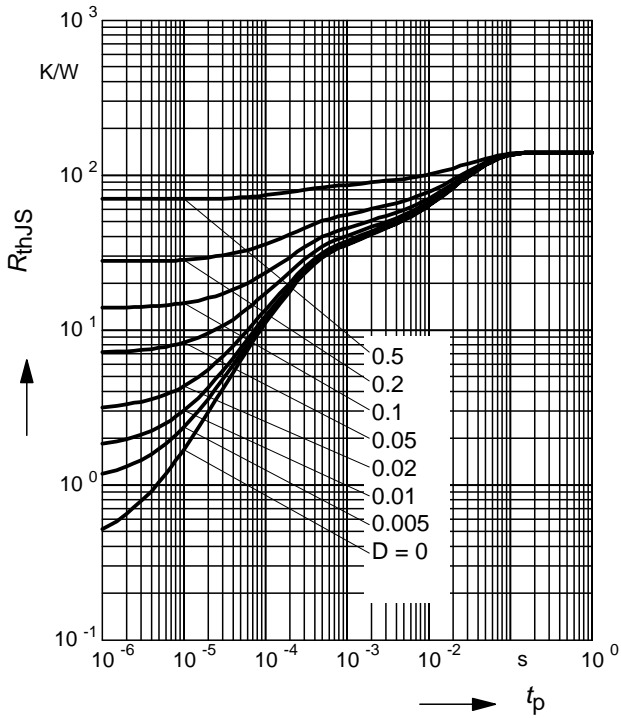

Permissible Pulse Load


$P_{totmax}/P_{totDC} = f(t_p)$

SMBT3904PN

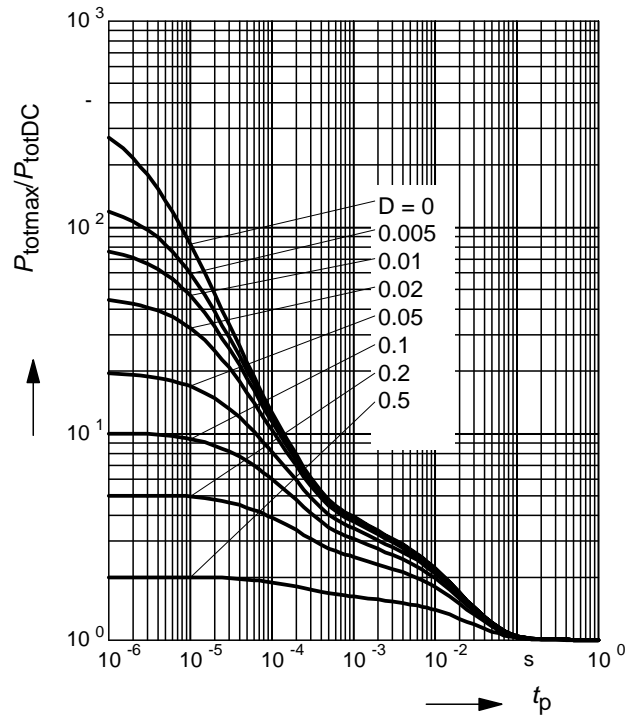

Permissible Puls Load $R_{thJS} = f(t_p)$


SMBT3904UPN

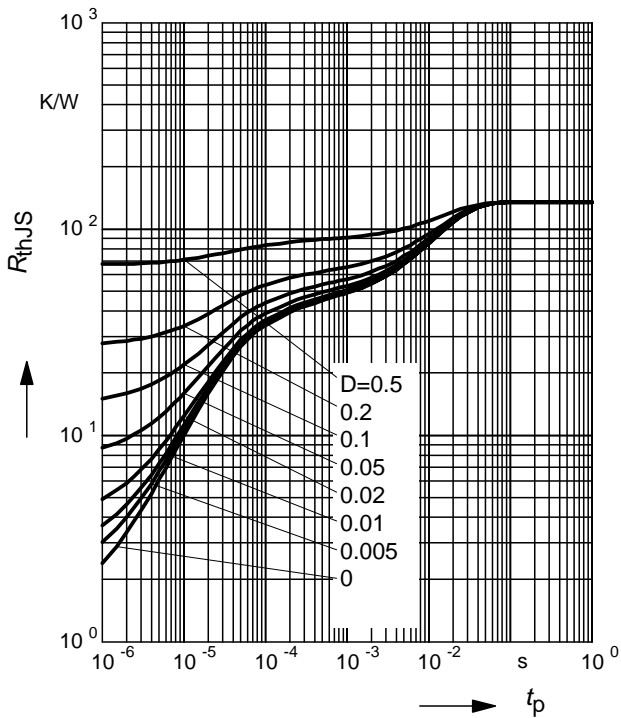

Permissible Pulse Load


$P_{totmax}/P_{totDC} = f(t_p)$

SMBT3904UPN

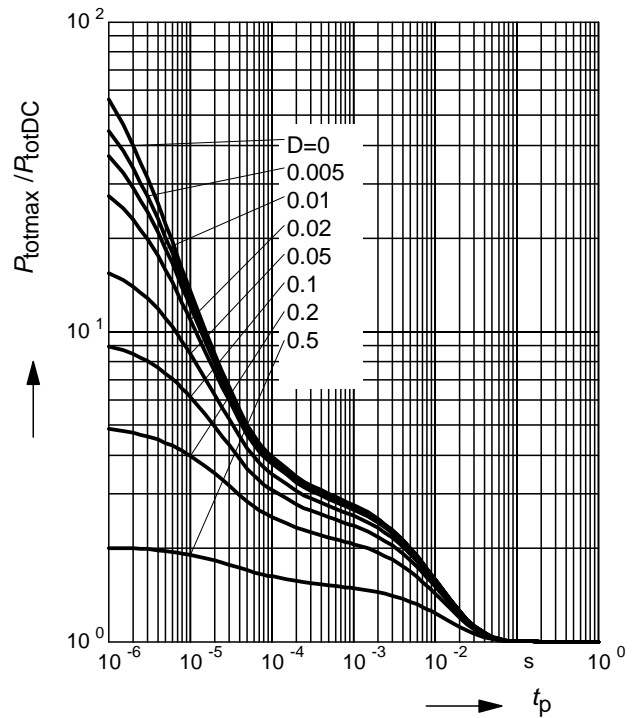


Delay time $t_d = f(I_C)$

Rise time $t_r = f(I_C)$


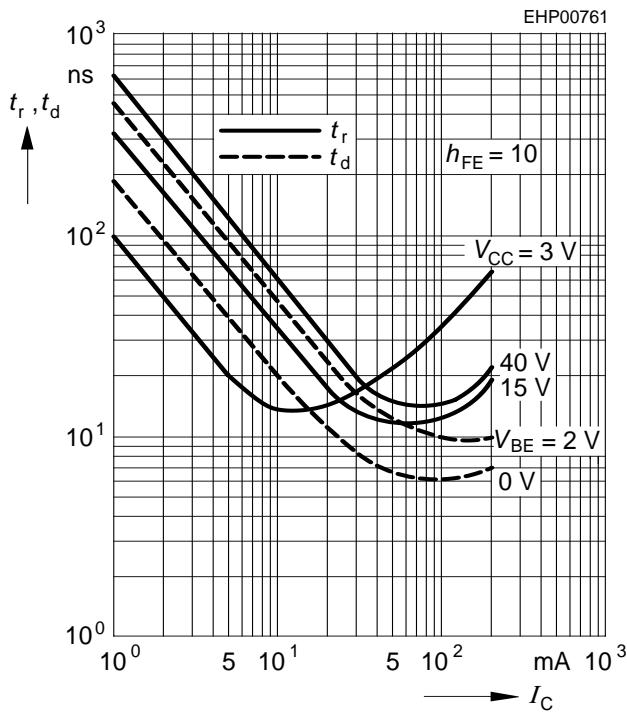


Storage time $t_{stg} = f(I_C)$

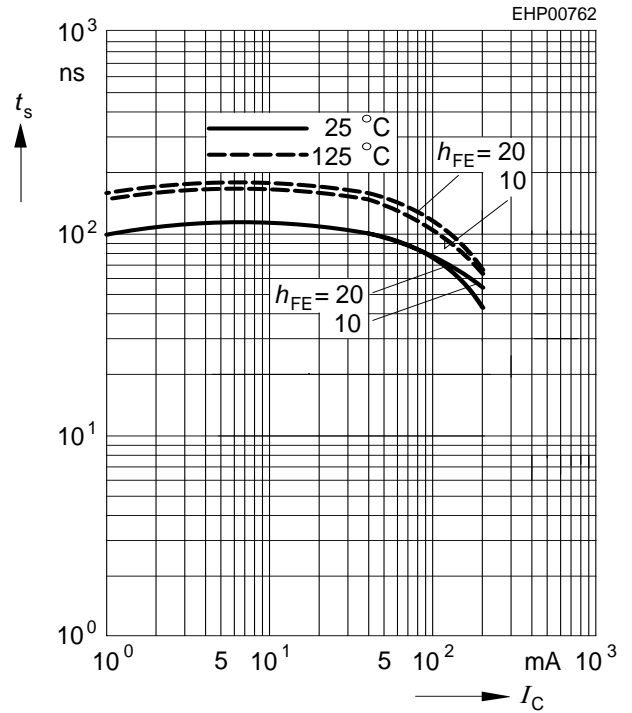


Fall time $t_f = f(I_C)$


Rise time $t_r = f(I_C)$

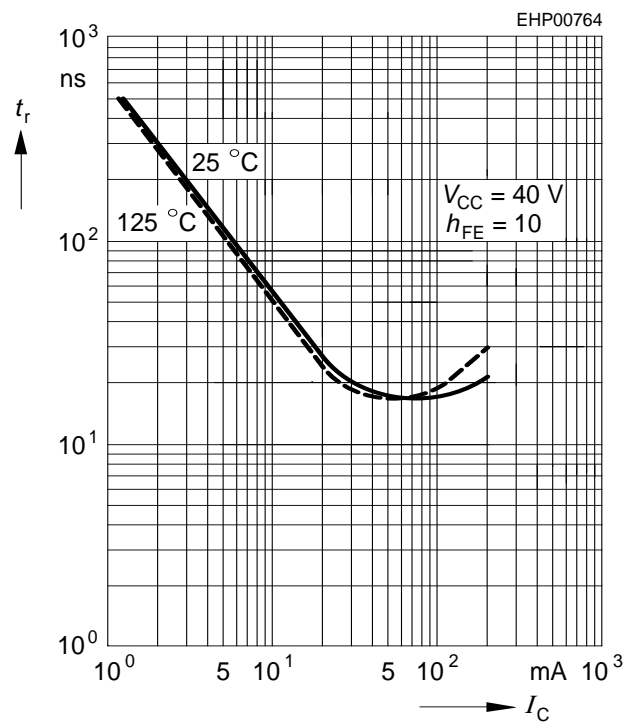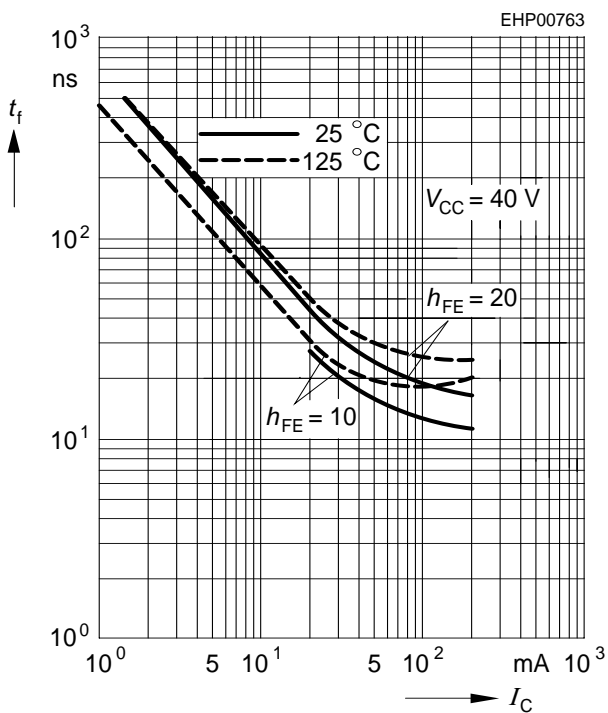

Package Outline

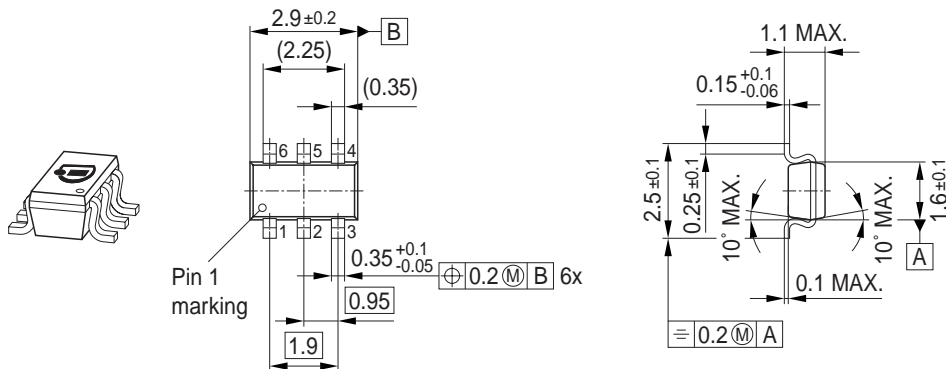


Foot Print



Marking Layout (Example)


Small variations in positioning of Date code, Type code and Manufacture are possible.

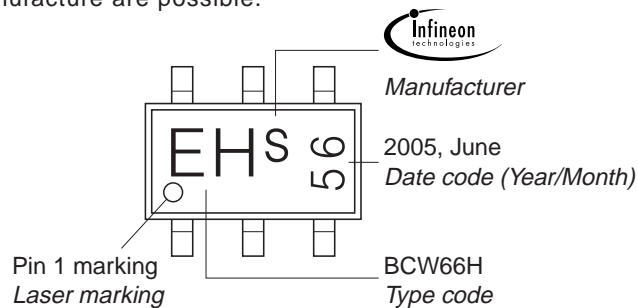


Standard Packing

Reel \varnothing 180 mm = 3.000 Pieces/Reel
 Reel \varnothing 330 mm = 10.000 Pieces/Reel


For symmetric types no defined Pin 1 orientation in reel.

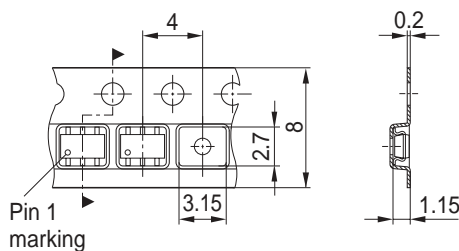

Package Outline

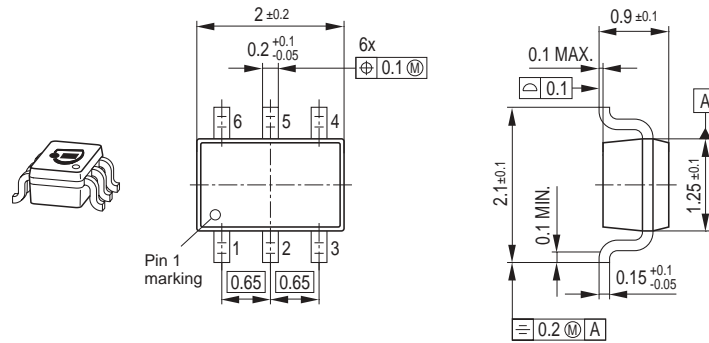


Foot Print

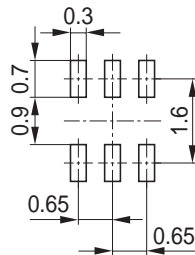

Marking Layout (Example)


Small variations in positioning of Date code, Type code and Manufacture are possible.

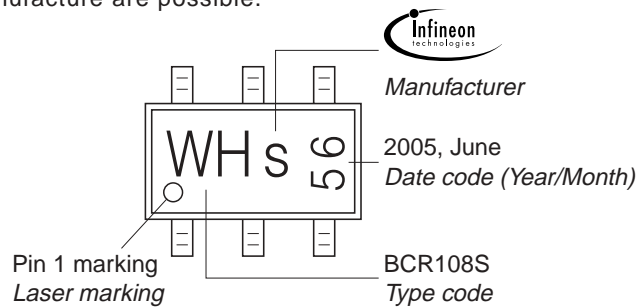

Standard Packing

Reel \varnothing 180 mm = 3.000 Pieces/Reel
 Reel \varnothing 330 mm = 10.000 Pieces/Reel

For symmetric types no defined Pin 1 orientation in reel.

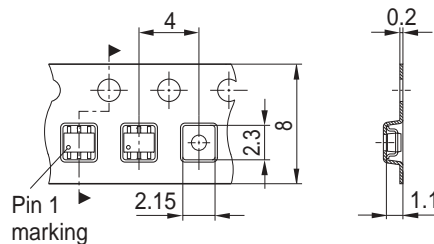

Edition 2006-02-01

Published by

Infineon Technologies AG

81726 München, Germany

© Infineon Technologies AG 2007.

All Rights Reserved.

Attention please!

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.