

To our customers,

---

## Old Company Name in Catalogs and Other Documents

---

On April 1<sup>st</sup>, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1<sup>st</sup>, 2010  
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

## Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
  - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
  - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
  - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

**THREE TERMINAL POSITIVE VOLTAGE REGULATORS**

**DESCRIPTION**

μPC7800A series are monolithic three terminal positive regulators which employ internally current limiting, thermal shut down, output transistor safe operating area protection make them essentially indestructible.

They are improved for ripple rejection ratio, line regulation, load regulation and quiescent current, as comparison of conventional μPC7800 series.

**FEATURES**


- Wide operation temperature range.
- High ripple rejection ratio.
- Good regulation (line, load).
- Low quiescent current.
- Built-in protection circuits.  
 (over current protection, SOA protection and thermal shut down)

**ORDER INFORMATION**


TYPE NUMBER	OUTPUT VOLTAGE	PACKAGE	QUALITY GRADE
μPC7805AHF	5 V	MP-45G (ISOLATED TO-220)	Standard
μPC7808AHF	8 V		
μPC7893AHF	9.3 V		
μPC7812AHF	12 V		
μPC7815AHF	15 V		
μPC7818AHF	18 V		
μPC7824AHF	24 V		

Please refer to "Quality grade on NEC Semiconductor Devices" (Document number IEI-1209) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.

**EQUIVALENT CIRCUIT**

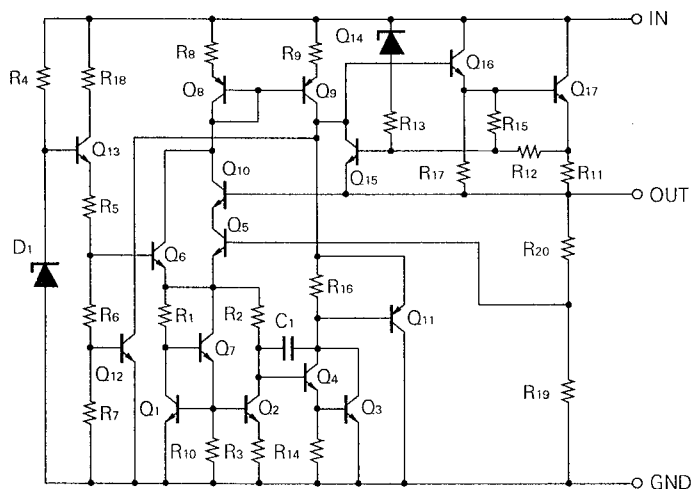

**CONNECTION DIAGRAM**




**ABSOLUTE MAXIMUM RATINGS (T<sub>a</sub> = 25 °C)**

CHARACTERISTIC	SYMBOL	RATING	UNIT
Input Voltage	V <sub>IN</sub>	35/40 (Note1)	V
Internal Power Dissipation	P <sub>T</sub>	15 (Note2)	W
Operating Ambient Temperature Range	T <sub>opt</sub>	- 30 to + 85	°C
Operating Junction Temperature Range	T <sub>opt(j)</sub>	- 30 to + 150	°C
Storage Temperature Range	T <sub>stg</sub>	- 55 to + 150	°C
Thermal Resistance (junction to case)	R <sub>th(j-c)</sub>	5	°C/W
Thermal Resistance (junction to ambient)	R <sub>th(j-a)</sub>	65	°C/W

(Note1) μPC7805A, 08A, 93A, 12A, 15A, 18A : 35 V, μPC7824A : 40 V

(Note2) Internally limited

**TYPICAL CONNECTION**

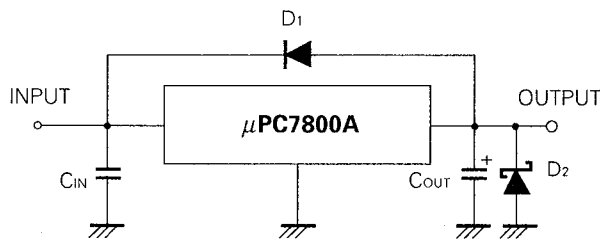

C<sub>1</sub>: Required if regulator is located an appreciable distance from power supply filter.

C<sub>2</sub>: More than 0.1 μF

D<sub>1</sub>: Needed for V<sub>IN</sub> < V<sub>o</sub>

D<sub>2</sub>: Needed for V<sub>o</sub> < GND

**RECOMMENDED OPERATING CONDITIONS**

CHARACTERISTIC	SYMBOL		MIN.	TYP.	MAX.	UNIT
Input Voltage	V <sub>IN</sub>	μPC7805AHF	7	10	25	V
		μPC7808AHF	10.5	14	25	
		μPC7893AHF	12	15	24.5	
		μPC7812AHF	14.5	19	30	
		μPC7815AHF	17.5	23	30	
		μPC7818AHF	21	27	33	
		μPC7824AHF	27	33	38	
Output Current	I <sub>o</sub>	All	0.005	0.5	1	A
Operating Junction Temperature Range	T <sub>opt(j)</sub>	All	- 30		+ 125	°C

**ELECTRICAL CHARACTERISTICS μPC7805A**

( $V_{IN} = 10\text{ V}$ ,  $I_o = 500\text{ mA}$ ,  $0\text{ °C} \leq T_j \leq +125\text{ °C}$ )

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_o$	$T_j = 25\text{ °C}$	4.8	5.0	5.2	V
		$7\text{ V} \leq V_{IN} \leq 20\text{ V}$ , $5\text{ mA} \leq I_o \leq 1\text{ A}$ , $P_T \leq 15\text{ W}$	4.75		5.25	
		$-30\text{ °C} \leq T_j \leq +125\text{ °C}$	4.75		5.25	
Line Regulation	REG <sub>IN</sub>	$T_j = 25\text{ °C}$ , $7\text{ V} \leq V_{IN} \leq 25\text{ V}$		7	30	mV
		$T_j = 25\text{ °C}$ , $8\text{ V} \leq V_{IN} \leq 12\text{ V}$		2	15	
Load Regulation	REG <sub>L</sub>	$T_j = 25\text{ °C}$ , $5\text{ mA} \leq I_o \leq 1.5\text{ A}$		4	30	mV
		$T_j = 25\text{ °C}$ , $250\text{ mA} \leq I_o \leq 750\text{ mA}$		2	10	
Quiescent Current	I <sub>BIAS</sub>	$T_j = 25\text{ °C}$		2.8	4.3	mA
Quiescent Current Change	$\Delta I_{BIAS}$	$7\text{ V} \leq V_{IN} \leq 25\text{ V}$			1.0	mA
		$5\text{ mA} \leq I_o \leq 1.0\text{ A}$			0.5	
Output Noize Voltage	$V_n$	$T_j = 25\text{ °C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$		40	200	μV <sub>r.m.s.</sub>
Ripple Rejection	R•R	$T_j = 25\text{ °C}$ , $f = 120\text{ Hz}$ , $8\text{ V} \leq V_{IN} \leq 18\text{ V}$	70	76		dB
Dropout Voltage	V <sub>DIF</sub>	$T_j = 25\text{ °C}$ , $I_o = 1.0\text{ A}$		1.8		V
Short Circuit Current	I <sub>Oshort</sub>	$T_j = 25\text{ °C}$ , $V_{IN} = 25\text{ V}$		1.6		A
Peak Output Current	I <sub>Opeak</sub>	$T_j = 25\text{ °C}$ , $V_{IN} = 10\text{ V}$	1.7	2.2	2.8	A
Temperature Coefficient of Output Voltage	$\Delta V_o/\Delta T$	$I_o = 5\text{ mA}$ , $0\text{ °C} \leq T_j \leq +125\text{ °C}$		-0.4		mV/°C

**ELECTRICAL CHARACTERISTICS μPC7808A**

( $V_{IN} = 14\text{ V}$ ,  $I_o = 500\text{ mA}$ ,  $0\text{ °C} \leq T_j \leq +125\text{ °C}$ )

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_o$	$T_j = 25\text{ °C}$	7.7	8.0	8.3	V
		$10.5\text{ V} \leq V_{IN} \leq 23\text{ V}$ , $5\text{ mA} \leq I_o \leq 1\text{ A}$ , $P_T \leq 15\text{ W}$	7.6		8.4	
		$-30\text{ °C} \leq T_j \leq +125\text{ °C}$	7.6		8.4	
Line Regulation	REG <sub>IN</sub>	$T_j = 25\text{ °C}$ , $10.5\text{ V} \leq V_{IN} \leq 25\text{ V}$		8	35	mV
		$T_j = 25\text{ °C}$ , $11\text{ V} \leq V_{IN} \leq 17\text{ V}$		3	25	
Load Regulation	REG <sub>L</sub>	$T_j = 25\text{ °C}$ , $5\text{ mA} \leq I_o \leq 1.5\text{ A}$		12	90	mV
		$T_j = 25\text{ °C}$ , $250\text{ mA} \leq I_o \leq 750\text{ mA}$		4	20	
Quiescent Current	I <sub>BIAS</sub>	$T_j = 25\text{ °C}$		3	4.4	mA
Quiescent Current Change	$\Delta I_{BIAS}$	$10.5\text{ V} \leq V_{IN} \leq 25\text{ V}$			1.0	mA
		$5\text{ mA} \leq I_o \leq 1.0\text{ A}$			0.5	
Output Noize Voltage	$V_n$	$T_j = 25\text{ °C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$		50	250	μV <sub>r.m.s.</sub>
Ripple Rejection	R•R	$T_j = 25\text{ °C}$ , $f = 120\text{ Hz}$ , $11.5\text{ V} \leq V_{IN} \leq 21.5\text{ V}$	66	72		dB
Dropout Voltage	V <sub>DIF</sub>	$T_j = 25\text{ °C}$ , $I_o = 1.0\text{ A}$		1.8		V
Short Circuit Current	I <sub>Oshort</sub>	$T_j = 25\text{ °C}$ , $V_{IN} = 25\text{ V}$		1.6		A
Peak Output Current	I <sub>Opeak</sub>	$T_j = 25\text{ °C}$ , $V_{IN} = 14\text{ V}$	1.7	2.2	2.8	A
Temperature Coefficient of Output Voltage	$\Delta V_o/\Delta T$	$I_o = 5\text{ mA}$ , $0\text{ °C} \leq T_j \leq +125\text{ °C}$		-0.6		mV/°C

**ELECTRICAL CHARACTERISTICS μPC7812A**  
 (V<sub>IN</sub> = 19 V, I<sub>o</sub> = 500 mA, 0 °C ≤ T<sub>j</sub> ≤ + 125 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>o</sub>	T <sub>j</sub> = 25 °C	11.5	12.0	12.5	V
		14.5 V ≤ V <sub>IN</sub> ≤ 27 V, 5 mA ≤ I <sub>o</sub> ≤ 1 A, P <sub>r</sub> ≤ 15 W	11.4		12.6	
		- 30 °C ≤ T <sub>j</sub> ≤ + 125 °C	11.4		12.6	
Line Regulation	REG <sub>IN</sub>	T <sub>j</sub> = 25 °C, 14.5 V ≤ V <sub>IN</sub> ≤ 30 V		10	45	mV
		T <sub>j</sub> = 25 °C, 16 V ≤ V <sub>IN</sub> ≤ 22 V		4	30	
Load Regulation	REG <sub>L</sub>	T <sub>j</sub> = 25 °C, 5 mA ≤ I <sub>o</sub> ≤ 1.5 A		17	130	mV
		T <sub>j</sub> = 25 °C, 250 mA ≤ I <sub>o</sub> ≤ 750 mA		6	30	
Quiescent Current	I <sub>BIAS</sub>	T <sub>j</sub> = 25 °C		3.1	4.6	mA
Quiescent Current Change	ΔI <sub>BIAS</sub>	14.5 V ≤ V <sub>IN</sub> ≤ 30 V			1.0	mA
		5 mA ≤ I <sub>o</sub> ≤ 1.0 A			0.5	
Output Noize Voltage	V <sub>n</sub>	T <sub>j</sub> = 25 °C, 10 Hz ≤ f ≤ 100 kHz		70	300	μV <sub>r.m.s.</sub>
Ripple Rejection	R•R	T <sub>j</sub> = 25 °C, f = 120 Hz, 15 V ≤ V <sub>IN</sub> ≤ 25 V	62	68		dB
Dropout Voltage	V <sub>DIF</sub>	T <sub>j</sub> = 25 °C, I <sub>o</sub> = 1.0 A		1.8		V
Short Circuit Current	I <sub>Oshort</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 30 V		1.3		A
Peak Output Current	I <sub>Opeak</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 19 V	1.7	2.2	2.8	A
Temperature Coefficient of Output Voltage	ΔV <sub>o</sub> /ΔT	I <sub>o</sub> = 5 mA, 0 °C ≤ T <sub>j</sub> ≤ + 125 °C		- 0.8		mV/°C

**ELECTRICAL CHARACTERISTICS μPC7815A**  
 (V<sub>IN</sub> = 23 V, I<sub>o</sub> = 500 mA, 0 °C ≤ T<sub>j</sub> ≤ + 125 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>o</sub>	T <sub>j</sub> = 25 °C	14.4	15.0	15.6	V
		17.5 V ≤ V <sub>IN</sub> ≤ 30 V, 5 mA ≤ I <sub>o</sub> ≤ 1 A, P <sub>r</sub> ≤ 15 W	14.25		15.75	
		- 30 °C ≤ T <sub>j</sub> ≤ + 125 °C	14.25		15.75	
Line Regulation	REG <sub>IN</sub>	T <sub>j</sub> = 25 °C, 17.5 V ≤ V <sub>IN</sub> ≤ 30 V		10	45	mV
		T <sub>j</sub> = 25 °C, 20 V ≤ V <sub>IN</sub> ≤ 26 V		5	35	
Load Regulation	REG <sub>L</sub>	T <sub>j</sub> = 25 °C, 5 mA ≤ I <sub>o</sub> ≤ 1.5 A		25	190	mV
		T <sub>j</sub> = 25 °C, 250 mA ≤ I <sub>o</sub> ≤ 750 mA		8	40	
Quiescent Current	I <sub>BIAS</sub>	T <sub>j</sub> = 25 °C		3.3	4.8	mA
Quiescent Current Change	ΔI <sub>BIAS</sub>	17.5 V ≤ V <sub>IN</sub> ≤ 30 V			1.0	mA
		5 mA ≤ I <sub>o</sub> ≤ 1.0 A			0.5	
Output Noize Voltage	V <sub>n</sub>	T <sub>j</sub> = 25 °C, 10 Hz ≤ f ≤ 100 kHz		85	400	μV <sub>r.m.s.</sub>
Ripple Rejection	R•R	T <sub>j</sub> = 25 °C, f = 120 Hz, 18.5 V ≤ V <sub>IN</sub> ≤ 28.5 V	60	66		dB
Dropout Voltage	V <sub>DIF</sub>	T <sub>j</sub> = 25 °C, I <sub>o</sub> = 1.0 A		1.8		V
Short Circuit Current	I <sub>Oshort</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 30 V		1.3		A
Peak Output Current	I <sub>Opeak</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 23 V	1.7	2.2	2.8	A
Temperature Coefficient of Output Voltage	ΔV <sub>o</sub> /ΔT	I <sub>o</sub> = 5 mA, 0 °C ≤ T <sub>j</sub> ≤ + 125 °C		- 1.1		mV/°C

**ELECTRICAL CHARACTERISTICS μPC7818A**

( $V_{IN} = 27\text{ V}$ ,  $I_o = 500\text{ mA}$ ,  $0\text{ °C} \leq T_j \leq +125\text{ °C}$ )

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_o$	$T_j = 25\text{ °C}$	17.3	18.0	18.7	V
		$21\text{ V} \leq V_{IN} \leq 33\text{ V}$ , $5\text{ mA} \leq I_o \leq 1\text{ A}$ , $P_r \leq 15\text{ W}$	17.1		18.9	
		$-30\text{ °C} \leq T_j \leq +125\text{ °C}$	17.1		18.9	
Line Regulation	$REG_{IN}$	$T_j = 25\text{ °C}$ , $21\text{ V} \leq V_{IN} \leq 33\text{ V}$		12	60	mV
		$T_j = 25\text{ °C}$ , $24\text{ V} \leq V_{IN} \leq 30\text{ V}$		6	45	
Load Regulation	$REG_L$	$T_j = 25\text{ °C}$ , $5\text{ mA} \leq I_o \leq 1.5\text{ A}$		32	110	mV
		$T_j = 25\text{ °C}$ , $250\text{ mA} \leq I_o \leq 750\text{ mA}$		10	40	
Quiescent Current	$I_{BIAS}$	$T_j = 25\text{ °C}$		3.4	5.0	mA
Quiescent Current Change	$\Delta I_{BIAS}$	$21\text{ V} \leq V_{IN} \leq 33\text{ V}$			1.0	mA
		$5\text{ mA} \leq I_o \leq 1.0\text{ A}$			0.5	
Output Noise Voltage	$V_n$	$T_j = 25\text{ °C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$		95	450	$\mu V_{r.m.s.}$
Ripple Rejection	$R \cdot R$	$T_j = 25\text{ °C}$ , $f = 120\text{ Hz}$ , $22\text{ V} \leq V_{IN} \leq 32\text{ V}$	59	65		dB
Dropout Voltage	$V_{DIF}$	$T_j = 25\text{ °C}$ , $I_o = 1.0\text{ A}$		1.8		V
Short Circuit Current	$I_{Oshort}$	$T_j = 25\text{ °C}$ , $V_{IN} = 33\text{ V}$		1.2		A
Peak Output Current	$I_{Opeak}$	$T_j = 25\text{ °C}$ , $V_{IN} = 27\text{ V}$	1.7	2.2	2.8	A
Temperature Coefficient of Output Voltage	$\Delta V_o / \Delta T$	$I_o = 5\text{ mA}$ , $0\text{ °C} \leq T_j \leq +125\text{ °C}$		-1.3		mV/°C

**ELECTRICAL CHARACTERISTICS μPC7824A**

( $V_{IN} = 33\text{ V}$ ,  $I_o = 500\text{ mA}$ ,  $0\text{ °C} \leq T_j \leq +125\text{ °C}$ )

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_o$	$T_j = 25\text{ °C}$	23.0	24.0	25.0	V
		$27\text{ V} \leq V_{IN} \leq 38\text{ V}$ , $5\text{ mA} \leq I_o \leq 1\text{ A}$ , $P_r \leq 15\text{ W}$	22.8		25.2	
		$-30\text{ °C} \leq T_j \leq +125\text{ °C}$	22.8		25.2	
Line Regulation	$REG_{IN}$	$T_j = 25\text{ °C}$ , $27\text{ V} \leq V_{IN} \leq 38\text{ V}$		15	80	mV
		$T_j = 25\text{ °C}$ , $30\text{ V} \leq V_{IN} \leq 36\text{ V}$		8	50	
Load Regulation	$REG_L$	$T_j = 25\text{ °C}$ , $5\text{ mA} \leq I_o \leq 1.5\text{ A}$		44	150	mV
		$T_j = 25\text{ °C}$ , $250\text{ mA} \leq I_o \leq 750\text{ mA}$		14	50	
Quiescent Current	$I_{BIAS}$	$T_j = 25\text{ °C}$		3.6	5.3	mA
Quiescent Current Change	$\Delta I_{BIAS}$	$27\text{ V} \leq V_{IN} \leq 38\text{ V}$			1.0	mA
		$5\text{ mA} \leq I_o \leq 1.0\text{ A}$			0.5	
Output Noise Voltage	$V_n$	$T_j = 25\text{ °C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$		120	500	$\mu V_{r.m.s.}$
Ripple Rejection	$R \cdot R$	$T_j = 25\text{ °C}$ , $f = 120\text{ Hz}$ , $28\text{ V} \leq V_{IN} \leq 38\text{ V}$	55	62		dB
Dropout Voltage	$V_{DIF}$	$T_j = 25\text{ °C}$ , $I_o = 1.0\text{ A}$		2.0		V
Short Circuit Current	$I_{Oshort}$	$T_j = 25\text{ °C}$ , $V_{IN} = 38\text{ V}$		1.0		A
Peak Output Current	$I_{Opeak}$	$T_j = 25\text{ °C}$ , $V_{IN} = 33\text{ V}$	1.7	2.2	2.8	A
Temperature Coefficient of Output Voltage	$\Delta V_o / \Delta T$	$I_o = 5\text{ mA}$ , $0\text{ °C} \leq T_j \leq +125\text{ °C}$		-1.7		mV/°C







**ELECTRICAL CHARACTERISTICS μPC7893A**

( $V_{IN} = 15\text{ V}$ ,  $I_o = 500\text{ mA}$ ,  $0\text{ °C} \leq T_j \leq +125\text{ °C}$ )


CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_o$	$T_j = 25\text{ °C}$	9.0	9.3	9.5	V
		$12\text{ V} \leq V_{IN} \leq 24.5\text{ V}$ , $5\text{ mA} \leq I_o \leq 1\text{ A}$ , $P_r \leq 15\text{ W}$	8.9		9.7	
		$-30\text{ °C} \leq T_j \leq +125\text{ °C}$	8.9		9.7	
Line Regulation	$REG_{IN}$	$T_j = 25\text{ °C}$ , $12\text{ V} \leq V_{IN} \leq 26.5\text{ V}$		9	40	mV
		$T_j = 25\text{ °C}$ , $12.5\text{ V} \leq V_{IN} \leq 18.5\text{ V}$		4	30	
Load Regulation	$REG_L$	$T_j = 25\text{ °C}$ , $5\text{ mA} \leq I_o \leq 1.5\text{ A}$		15	110	mV
		$T_j = 25\text{ °C}$ , $250\text{ mA} \leq I_o \leq 750\text{ mA}$		5	25	
Quiescent Current	$I_{BIAS}$	$T_j = 25\text{ °C}$		3.1	4.5	mA
Quiescent Current Change	$\Delta I_{BIAS}$	$12\text{ V} \leq V_{IN} \leq 26.5\text{ V}$			1.0	mA
		$5\text{ mA} \leq I_o \leq 1.0\text{ A}$			0.5	
Output Noise Voltage	$V_n$	$T_j = 25\text{ °C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$		55	230	μV <sub>r.m.s.</sub>
Ripple Rejection	$R \cdot R$	$T_j = 25\text{ °C}$ , $f = 120\text{ Hz}$ , $12.5\text{ V} \leq V_{IN} \leq 22.5\text{ V}$	64	70		dB
Dropout Voltage	$V_{DIF}$	$T_j = 25\text{ °C}$ , $I_o = 1.0\text{ A}$		1.8		V
Short Circuit Current	$I_{Oshort}$	$T_j = 25\text{ °C}$ , $V_{IN} = 26.5\text{ V}$		1.5		A
Peak Output Current	$I_{Opeak}$	$T_j = 25\text{ °C}$ , $V_{IN} = 15\text{ V}$	1.7	2.2	2.8	A
Temperature Coefficient of Output Voltage	$\Delta V_o / \Delta T$	$I_o = 5\text{ mA}$ , $0\text{ °C} \leq T_j \leq +125\text{ °C}$		-0.7		mV/°C




TYPICAL CHARACTERISTICS (T<sub>a</sub> = 25 °C)

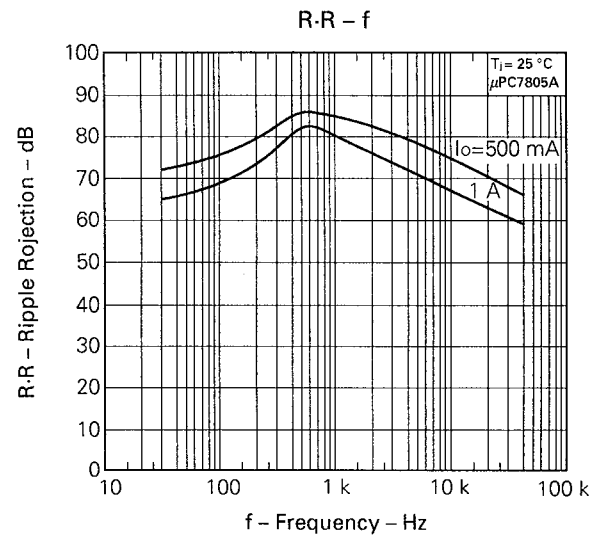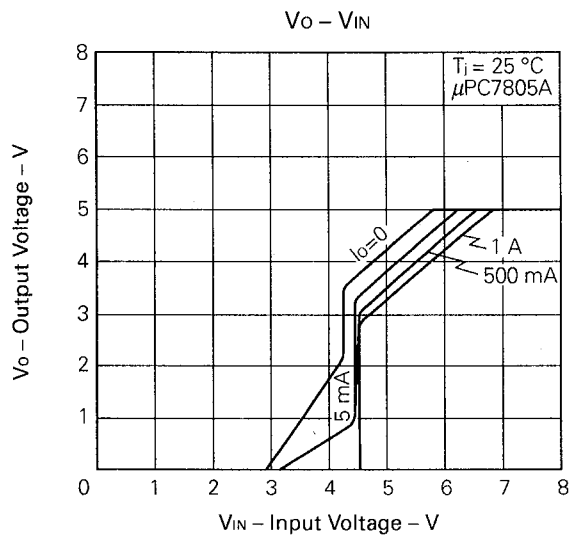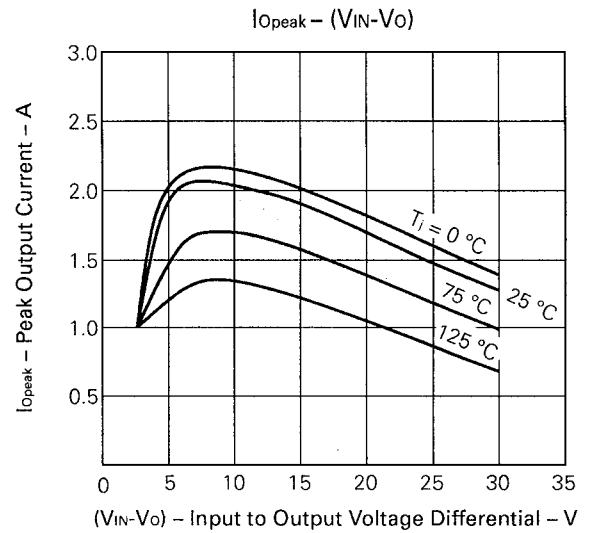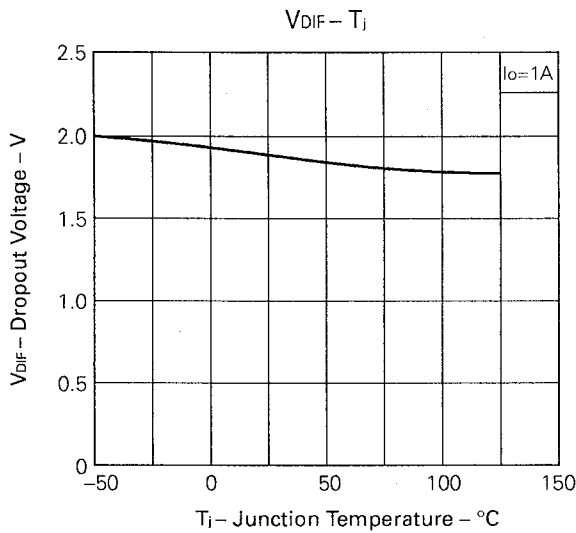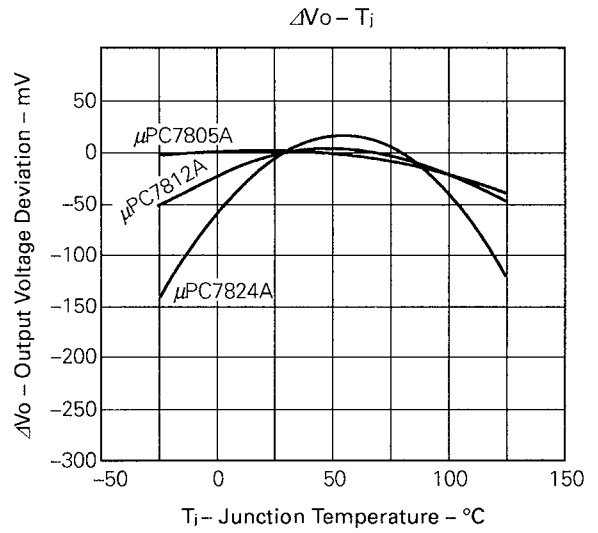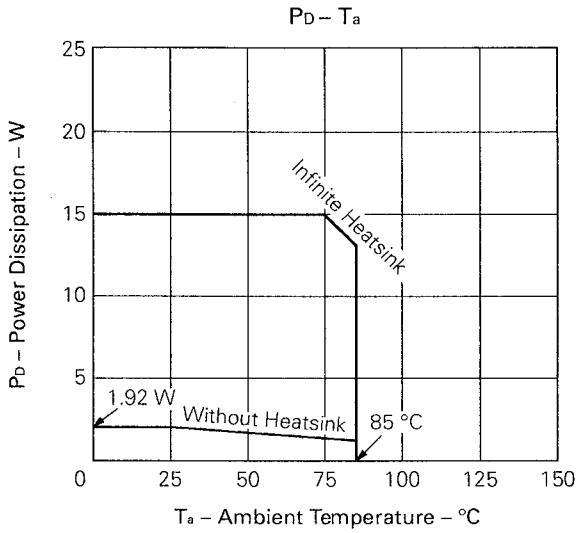


LINE TRANSIENT RESPONSE

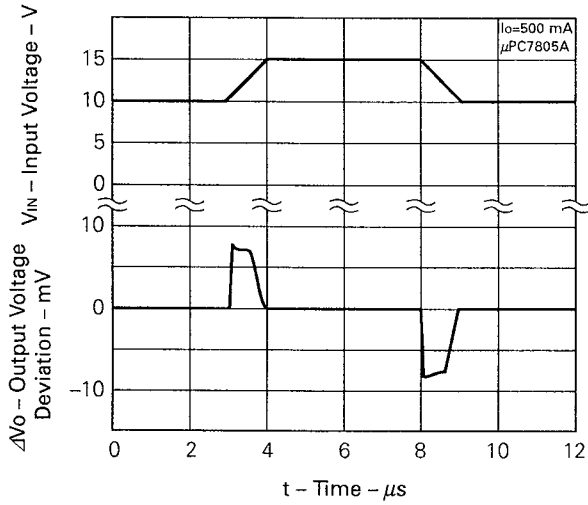

LOAD TRANSIENT RESPONSE

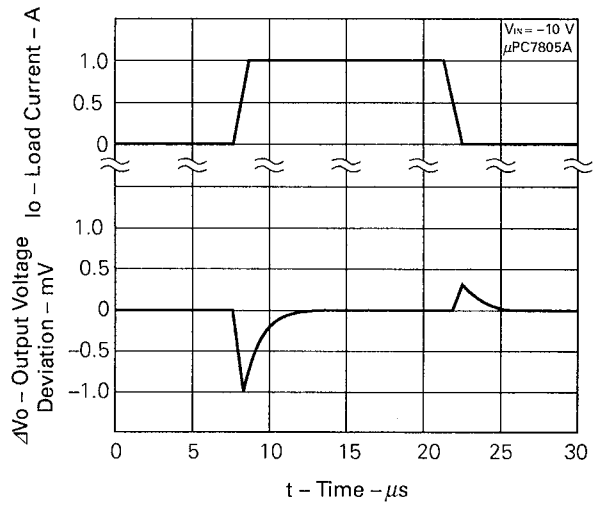


$R_o - f$

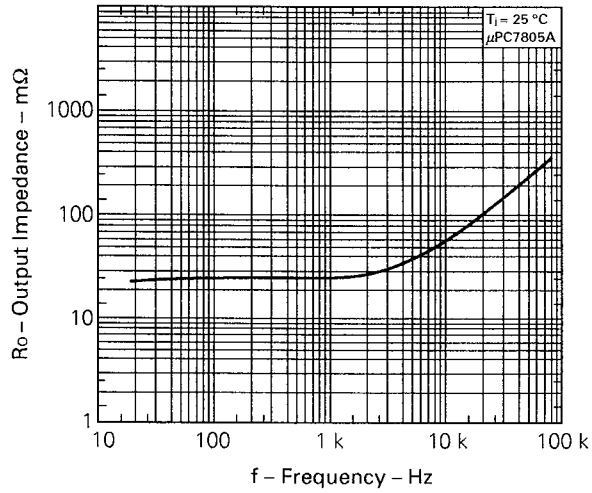

PACKAGE DIMENSIONS

3PIN PLASTIC SIP (MP-45G)

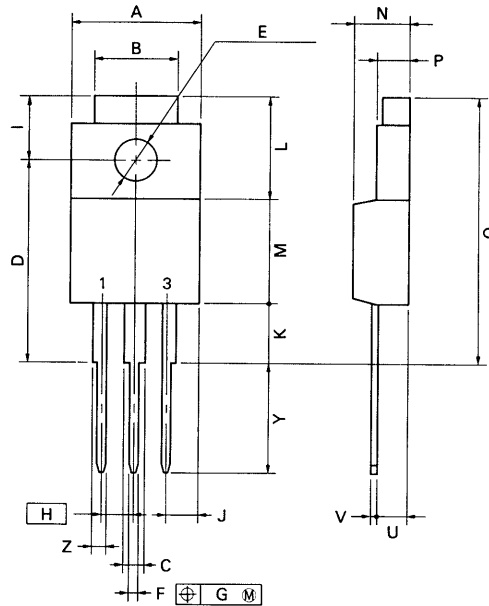

P3HF-254B-1

NOTE

Each lead centerline is located within 0.25 mm (0.01 inch) of its true position (T.P.) at maximum material condition.

ITEM	MILLIMETERS	INCHES
A	10.4 MAX.	0.410 MAX.
B	7.0	0.276
C	1.2 MIN.	0.047 MIN.
D	17.0 <sup>±0.3</sup>	0.669 <sup>+0.013</sup> <sub>-0.012</sub>
E	φ3.3 <sup>±0.2</sup>	φ0.130 <sup>±0.008</sup>
F	0.75 <sup>±0.10</sup>	0.030 <sup>+0.004</sup> <sub>-0.005</sub>
G	0.25	0.010
H	2.54 (T.P.)	0.100 (T.P.)
I	5.0 <sup>±0.3</sup>	0.197 <sup>±0.012</sup>
J	2.66 MAX.	0.105 MAX.
K	4.8 MIN.	0.188 MIN.
L	8.5	0.335
M	8.5	0.335
N	4.5 <sup>±0.2</sup>	0.177 <sup>±0.008</sup>
P	2.8 <sup>±0.2</sup>	0.110 <sup>+0.009</sup> <sub>-0.008</sub>
Q	22.4 MAX.	0.882 MAX.
U	2.4 <sup>±0.5</sup>	0.094 <sup>+0.021</sup> <sub>-0.020</sub>
V	0.65 <sup>±0.10</sup>	0.026 <sup>+0.004</sup> <sub>-0.005</sub>
Y	8.9 <sup>±0.7</sup>	0.350 <sup>±0.028</sup>
Z	1.0 MIN.	0.039 MIN.

**RECOMMENDED SOLDERING CONDITIONS**

The following conditions (see table below) must be met when soldering this product.  
 Please consult with our sales offices in case other soldering process is used, or in case soldering is done under different conditions.

**TYPES OF THROUGH HOLE MOUNT DEVICE**

μPC7800AHF Series

Soldering process	Soldering conditions	Symbol
Wave soldering	Solder temperature : 260 °C or below. Flow time : 10 seconds or below.	

[MEMO]

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

The devices listed in this document are not suitable for use in aerospace equipment, submarine cables, nuclear reactor control systems and life support systems. If customers intend to use NEC devices for above applications or they intend to use "Standard" quality grade NEC devices for applications not intended by NEC, please contact our sales people in advance.

Application examples recommended by NEC Corporation.

Standard: Computer, Office equipment, Communication equipment, Test and Measurement equipment, Machine tools, Industrial robots, Audio and Visual equipment, Other consumer products, etc.

Special: Automotive and Transportation equipment, Traffic control systems, Antidisaster systems, Anticrime systems, etc.