


### KSD2012

# Low Frequency Power Amplifier • Complement to KSB1366



## **NPN Epitaxial Silicon Transistor**

### Absolute Maximum Ratings T<sub>C</sub>=25°C unless otherwise noted

Symbol	Parameter	Value	Units
V <sub>CBO</sub>	Collector-Base Voltage	60	V
V <sub>CEO</sub>	Collector-Emitter Voltage	60	V
V <sub>EBO</sub>	Emitter-Base Voltage	7	V
I <sub>C</sub>	Collector Current	3	А
I <sub>B</sub>	Base Current	0.3	Α
P <sub>C</sub>	Collector Power Dissipation (T <sub>C</sub> =25°C)	25	W
T <sub>J</sub>	Junction Temperature	150	°C
T <sub>STG</sub>	Storage Temperature	- 55 ~ 150	°C

### Electrical Characteristics T<sub>C</sub>=25°C unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Units
BV <sub>CEO</sub>	Collector-Emitter Breakdown Voltage	$I_C = 50 \text{mA}, I_B = 0$	60			V
I <sub>CBO</sub>	Collector Cut-off Current	$V_{CB} = 60V, I_{E} = 0$			100	μΑ
I <sub>EBO</sub>	Emitter Cut-off Current	$V_{EB} = 7V, I_{C} = 0$			10	μΑ
h <sub>FE1</sub>	DC Current Gain	$V_{CE} = 5V, I_{C} = 0.5A$	100		320	
h <sub>FE2</sub>		$V_{CE} = 5V, I_{C} = 3A$	20			
V <sub>CE</sub> (sat)	Collector-Emitter Saturation Voltage	$I_C = 2A, I_B = 0.2A$		0.4	1	V
V <sub>BE</sub> (on)	Base-Emitter ON Voltage	$V_{CE} = 5V, I_{C} = 0.5A$		0.7	1	V
f <sub>T</sub>	Current Gain Bandwidth Product	$V_{CE} = 5V, I_{C} = 0.5A$		3		MHz

## $h_{\text{FE}}$ Classification

Classification	Y	G		
h <sub>FE1</sub>	100 ~ 200	150 ~ 320		

## **Typical Characteristics**

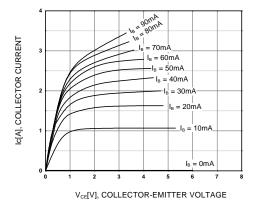


Figure 1. Static Characteristic

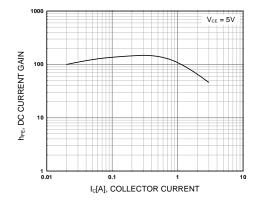


Figure 2. DC current Gain

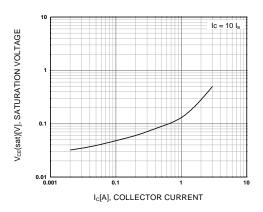


Figure 3. Collector-Emitter Saturation Voltage

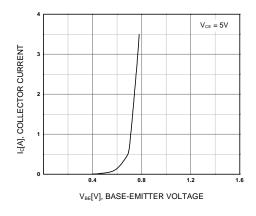


Figure 4. Base-Emitter On Voltage

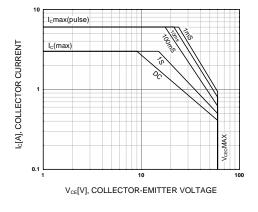


Figure 5. Safe Operating Area


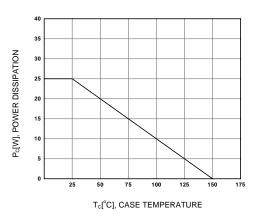


Figure 6. Power Derating

©2000 Fairchild Semiconductor International Rev. A, February 2000

## **Package Demensions**

## TO-220F

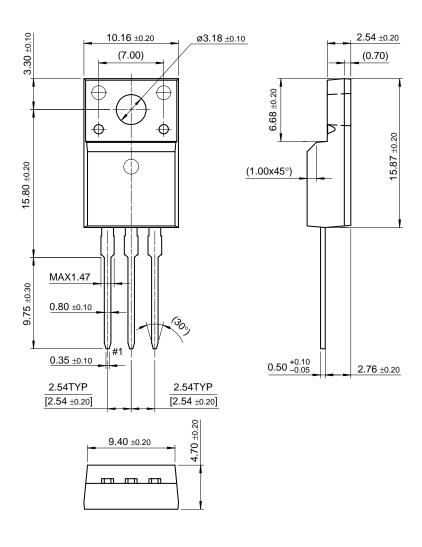

Dimensions in Millimeters

#### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

FACT™ QFET™ FACT Quiet Series™ QS™

FAST<sup>®</sup> Quiet Series<sup>™</sup> SuperSOT<sup>™</sup>-3 GTO<sup>™</sup> SuperSOT<sup>™</sup>-6

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR INTERNATIONAL.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### PRODUCT STATUS DEFINITIONS

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition		
Advance Information Formative or In Design		This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.		
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.		
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.		
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.		

©2000 Fairchild Semiconductor International Rev. E

Search:

Go

Home >> Find products >>

#### **KSD2012**

NPN Epitaxial Silicon Transistor

#### **Contents**

Features

Qualification Support

- Applications
- Product status/pricing/packaging
- Order Samples

#### **Features**

**Low Frequency Power Amplifier** 

Complement to KSB1366

back to top

**Applications** 

**Low Frequency Power Amplifier** 

back to top

Product status/pricing/packaging

BUY

BUY

Datasheet Download this datasheet



e-mail this datasheet



This page **Print version** 

#### **Related Links**

Request samples

How to order products

**Product Change Notices** (PCNs)

Support

Sales support

Quality and reliability

Design center

Product	Product status	Pb-free Status	Pricing*	Package type	Leads	Packing method	Package Marking Convention**	
KSD2012GTU	Full Production	Full Production	\$0.253	<u>TO-220F</u>	3	RAIL	<u>Line 1:</u> <b>\$Y</b> (Fairchild logo) <u>Line 2:</u> D2012-G <u>Line 3:</u> &3	
KSD2012YTU	Full Production	Full Production	\$0.255	TO-220F	3	RAIL	Line 1: <b>\$Y</b> (Fairchild logo) Line 2: D2012-Y Line 3: &3	

KSD2012YYDTU	Full Production	Full Production	\$0.275	<u>TO-220F</u>	3		<u>Line 1:</u> <b>\$Y</b> (Fairchild logo) <u>Line 2:</u> D2012-Y <u>Line 3:</u> &3
--------------	-----------------	--------------------	---------	----------------	---	--	--

<sup>\*</sup> Fairchild 1,000 piece Budgetary Pricing

\*\* A sample button will appear if the part is available through Fairchild's on-line samples program. If there is no sample button, please contact a Fairchild distributor to obtain samples



Indicates product with Pb-free second-level interconnect. For more information click here.

Package marking information for product KSD2012 is available. Click here for more information .

#### back to top

#### **Qualification Support**

Click on a product for detailed qualification data

Product
KSD2012GTU
KSD2012YTU
KSD2012YYDTU

#### back to top

© 2007 Fairchild Semiconductor



Products | Design Center | Support | Company News | Investors | My Fairchild | Contact Us | Site Index | Privacy Policy | Site Terms & Conditions | Standard Terms & Conditions |