SCCS020A - MARCH 1995 - REVISED OCTOBER 2001


- Function, Pinout, and Drive Compatible With FCT and F Logic
- Reduced V<sub>OH</sub> (Typically = 3.3 V) Versions of Equivalent FCT Functions
- Edge-Rate Control Circuitry for Significantly Improved Noise Characteristics
- I<sub>off</sub> Supports Partial-Power-Down Mode Operation
- Matched Rise and Fall Times
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)
- Fully Compatible With TTL Input and Output Logic Levels
- CY54FCT273T
  - 32-mA Output Sink Current
  - 12-mA Output Source Current
- CY74FCT273T
  - 64-mA Output Sink Current
  - 32-mA Output Source Current

#### description


The 'FCT273T devices consist of eight edge-triggered D-type flip-flops with individual D inputs and Q outputs. The common buffered-clock (CP) and master-reset (MR) inputs load and reset all flip-flops simultaneously. These devices are edge-triggered registers. The state of each D input (one setup time before the low-to-high clock transition) is transferred to the corresponding flip-flop's Q output. All outputs are forced low by a low logic level on the MR input.

This device is fully specified for partial-power-down applications using  $I_{\rm off}$ . The  $I_{\rm off}$  circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

CY54FCT273T...D PACKAGE CY74FCT273T...Q OR SO PACKAGE (TOP VIEW)



CY54FCT273T . . . L PACKAGE (TOP VIEW)





Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



#### **ORDERING INFORMATION**

TA	PACI	KAGE†	SPEED (ns)	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	QSOP – Q	Tape and reel	5.8	CY74FCT273CTQCT	FCT273C
	SOIC - SO	Tube	5.8	CY74FCT273CTSOC	FCT273C
	3010 - 30	Tape and reel	5.8	CY74FCT273CTSOCT	FC1273C
	QSOP – Q	Tape and reel	7.2	CY74FCT273ATQCT	FCT273A
–40°C to 85°C	SOIC - SO	Tube	7.2	CY74FCT273ATSOC	FCT273A
	3010 = 30	Tape and reel	7.2	CY74FCT273ATSOCT	FC1273A
	QSOP – Q	Tape and reel	13	CY74FCT273TQCT	FCT273
	SOIC - SO	Tube	13	CY74FCT273TSOC	FCT273
	3010 - 30	Tape and reel	13	CY74FCT273TSOCT	FC1273
–55°C to 125°C	LCC – L	Tube	8.3	CY54FCT273ATLMB	


<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

#### **FUNCTION TABLE**

	INPUTS		OUTPUT	OPERATING
MR	CP	D	Q	MODE
L	Х	Χ	L	Reset (clear)
Н	<b>↑</b>	h	Н	Load '1'
Н	$\uparrow$	I	L	Load '0'

H = High logic level steady state, h = High logic level one setup time prior to low-to-high clock transition, L = Low logic level steady state, I = Low logic level one setup time prior to the low-to-high transition, X = Don't care,  $\uparrow = Low-to-high$  clock transition

# logic diagram (positive logic)

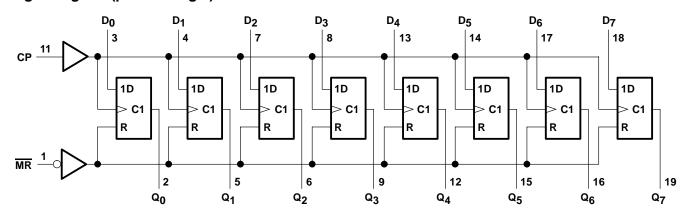

SCCS020A - MARCH 1995 - REVISED OCTOBER 2001

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range to ground potential	0.5 V to 7 V
DC input voltage range	0.5 V to 7 V
DC output voltage range	0.5 V to 7 V
DC output current (maximum sink current/pin)	120 mA
Package thermal impedance, θ <sub>JA</sub> (see Note 1): Q package	68°C/W
SO package	
Ambient temperature range with power applied, T <sub>A</sub>	–65°C to 135°C
Storage temperature range, T <sub>stg</sub>	–65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

## recommended operating conditions (see Note 2)

		CY	54FCT27	3T	CY7	74FCT27	3T	UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	ONIT
Vcc	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
VIH	High-level input voltage	2			2			V
VIL	Low-level input voltage			8.0			0.8	V
ІОН	High-level output current			-12			-32	mA
loL	Low-level output current			32			64	mA
T <sub>A</sub>	Operating free-air temperature	-55		125	-40		85	°C

NOTE 2: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation.



NOTE 1: The package thermal impedance is calculated in accordance with JESD 51-7.

SCCS020A - MARCH 1995 - REVISED OCTOBER 2001

# electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

DADAMETER		TEST SOMBITIO	NO.	CY	54FCT2	73T	CY	74FCT27	'3T	
PARAMETER		TEST CONDITIO	NS	MIN	TYP <sup>†</sup>	MAX	MIN	TYP <sup>†</sup>	MAX	UNIT
V	V <sub>C</sub> C = 4.5 V,	$I_{IN} = -18 \text{ mA}$			-0.7	-1.2				٧
VIK	$V_{CC} = 4.75 \text{ V},$	$I_{IN} = -18 \text{ mA}$						-0.7	-1.2	V
	$V_{CC} = 4.5 \text{ V},$	$I_{OH} = -12 \text{ mA}$		2.4	3.3					
Voн	V <sub>CC</sub> = 4.75 V	$I_{OH} = -32 \text{ mA}$					2			V
	VCC = 4.75 V	$I_{OH} = -15 \text{ mA}$					2.4	3.3		
Voi	$V_{CC} = 4.5 \text{ V},$	$I_{OL} = 32 \text{ mA}$			0.3	0.55				V
VOL	$V_{CC} = 4.75 \text{ V},$	$I_{OL} = 64 \text{ mA}$						0.3	0.55	V
$V_{hys}$	All inputs				0.2			0.2		V
	$V_{CC} = 5.5 V$ ,	VIN = VCC				5				μА
ΙΙ	$V_{CC} = 5.25 \text{ V},$	VIN = VCC							5	μΑ
	$V_{CC} = 5.5 \text{ V},$	$V_{1N} = 2.7 \text{ V}$				±1				μА
IН	$V_{CC} = 5.25 \text{ V},$	$V_{1N} = 2.7 \text{ V}$							±1	μΛ
1	$V_{CC} = 5.5 \text{ V},$	$V_{IN} = 0.5 V$				±1				μΑ
IIL	$V_{CC} = 5.25 \text{ V},$	$V_{IN} = 0.5 V$							±1	μΛ
l <sub>off</sub>	$V_{CC} = 0 V$	V <sub>OUT</sub> = 4.5 V				±1			±1	μΑ
los‡	$V_{CC} = 5.5 \text{ V},$	VOUT = 0 V		-60	-120	-225				mA
ios+	$V_{CC} = 5.25 \text{ V},$	VOUT = 0 V					-60	-120	-225	IIIA
loo	$V_{CC} = 5.5 V$ ,	$V_{IN} \le 0.2 V$	$V_{IN} \ge V_{CC} - 0.2 \text{ V}$		0.1	0.2				mA
Icc	$V_{CC} = 5.25 \text{ V},$	$V_{IN} \le 0.2 V$	$V_{IN} \ge V_{CC} - 0.2 \text{ V}$					0.1	0.2	IIIA
Aloo	$V_{CC} = 5.5 \text{ V}, \text{ V}_{IN}$	= 3.4 V\$, f <sub>1</sub> = 0, O	utputs open		0.5	2				mA
∆ICC	V <sub>CC</sub> = 5.25 V, V <sub>IN</sub>	$_{\text{N}} = 3.4 \text{ V}, f_{1} = 0, O$	utputs open					0.5	2	IIIA

<sup>†</sup> Typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .



<sup>\*</sup>Not more than one output should be shorted at a time. Duration of short should not exceed one second. The use of high-speed test apparatus and/or sample-and-hold techniques are preferable to minimize internal chip heating and more accurately reflect operational values. Otherwise, prolonged shorting of a high output can raise the chip temperature well above normal and cause invalid readings in other parametric tests. In any sequence of parameter tests, IOS tests should be performed last.

<sup>§</sup> Per TTL-driven input (V<sub>IN</sub> = 3.4 V); all other inputs at V<sub>CC</sub> or GND

### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted) (continued)

DADAMETER		TEST CONDITION	c	CY	54FCT27	73T	CY	74FCT27	73T	LINUT
PARAMETER	PARAMETER TEST CONDITIONS					MAX	MIN	TYP <sup>†</sup>	MAX	UNIT
loop¶		tputs open, g at 50% duty cycle, M IN ≥ VCC – 0.2 V	R = V <sub>CC</sub> ,		0.06	0.12				mA/
ICCD¶		utputs open, g at 50% duty cycle, $\overline{M}$ IN $\geq$ V <sub>CC</sub> $-$ 0.2 V	$\overline{R} = V_{CC}$ ,					0.06	0.12	MHz
	V <sub>CC</sub> = 5.5 V,	One bit switching at f <sub>1</sub> = 2.5 MHz	$V_{IN} \le 0.2 \text{ V or}$ $V_{IN} \ge V_{CC} - 0.2 \text{ V}$		0.7	1.4				
	$f_0 = 10 \text{ MHz},$	at 50% duty cycle	$V_{IN} = 3.4 \text{ V or GND}$		1.2	3.4				
	Outputs open, MR = VCC	Eight bits switching at f <sub>1</sub> = 2.5 MHz	$V_{IN} \le 0.2 \text{ V or}$ $V_{IN} \ge V_{CC} - 0.2 \text{ V}$		1.6	3.2				
IC#		at 50% duty cycle	$V_{IN} = 3.4 \text{ V or GND}$		3.9	12.2				mA
I IC"	V <sub>CC</sub> = 5.25 V,	One bit switching at f <sub>1</sub> = 5 MHz	$V_{IN} \le 0.2 \text{ V or}$ $V_{IN} \ge V_{CC} - 0.2 \text{ V}$					0.7	1.4	mA
	$f_0 = 10 \text{ MHz},$	at 50% duty cycle	$V_{IN} = 3.4 \text{ V or GND}$					1.2	3.4	
	Outputs open, MR = V <sub>CC</sub>	Eight bits switching at f <sub>1</sub> = 5 MHz	$V_{IN} \le 0.2 \text{ V or}$ $V_{IN} \ge V_{CC} - 0.2 \text{ V}$					1.6	3.2	
		at 50% duty cycle	V <sub>IN</sub> = 3.4 V or GND					3.9	12.2	
C <sub>i</sub>					5	10		5	10	pF
Co					9	12		9	12	pF

<sup>†</sup> Typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

Where:

 $\begin{array}{ll} I_C & = \mbox{Total supply current} \\ I_{CC} & = \mbox{Power-supply current with CMOS input levels} \end{array}$ 

 $\Delta I_{CC}$  = Power-supply current for a TTL high input ( $V_{IN} = 3.4 \text{ V}$ )

D<sub>H</sub> = Duty cycle for TTL inputs high N<sub>T</sub> = Number of TTL inputs at D<sub>H</sub>

ICCD = Dynamic current caused by an input transition pair (HLH or LHL)

= Clock frequency for registered devices, otherwise zero

= Input signal frequency

= Number of inputs changing at f<sub>1</sub>

All currents are in milliamperes and all frequencies are in megahertz.

|| Values for these conditions are examples of the I<sub>CC</sub> formula.

This parameter is derived for use in total power-supply calculations.

 $<sup>^{\#}</sup>$ IC = ICC +  $\triangle$ ICC  $\times$  D<sub>H</sub>  $\times$  N<sub>T</sub> + ICCD ( $f_0/2 + f_1 \times N_1$ )

# CY54FCT273T, CY74FCT273T 8-BIT REGISTERS

SCCS020A - MARCH 1995 - REVISED OCTOBER 2001

# timing requirements over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)


			CY74FC	T273T	CY54FCT	273AT	CY74FCT	273AT	CY74FCT	273CT	UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	UNIT
	Dulco duration, high or low	СР	6		6		6		6		no
t <sub>W</sub>	Pulse duration, high or low	MR	6		6		6		6		ns
t <sub>su</sub>	Setup time, high or low	D before CP↑	2		2		2		2		ns
th	Hold time, high or low	D after CP↑	1.5		1.5		1.5		1.5		ns
t <sub>rec</sub>	Recovery time	MR after CP↑	2		2.5		2		2		ns

# switching characteristics over operating free-air temperature range (see Figure 1)

PARAMETER	FROM	то	CY74FC	T273T	CY54FC	Г273АТ	CY74FC	7273AT	CY74FCT273CT		UNIT
PARAMETER	(INPUT)	(OUTPUT)	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	ONIT
<sup>t</sup> PLH	СР	Q	2	13	2	8.3	2	7.2	2	5.8	no
t <sub>PHL</sub>		Q	2	13	2	8.3	2	7.2	2	5.8	ns
t <sub>PLH</sub>	MR	Q	2	13	2	8.3	2	7.2	2	6.1	no
t <sub>PHL</sub>	IVIK	Q	2	13	2	8.3	2	7.2	2	6.1	ns



#### PARAMETER MEASUREMENT INFORMATION

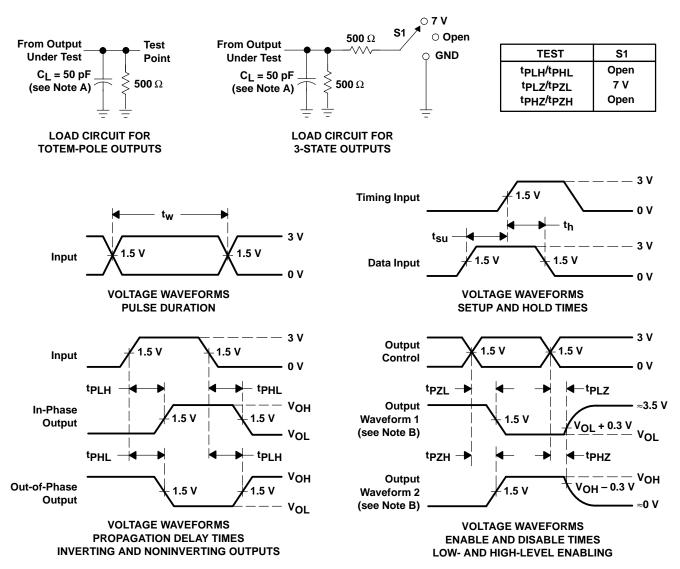

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. The outputs are measured one at a time with one input transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms





6-Feb-2020

#### **PACKAGING INFORMATION**

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
5962-9221503M2A	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type	-55 to 125	5962- 9221503M2A CY54FCT 273ATLMB	Samples
5962-9221503MRA	ACTIVE	CDIP	J	20	1	TBD	Call TI	N / A for Pkg Type	-55 to 125	5962-9221503MR A	Samples
CY54FCT273ATLMB	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type	-55 to 125	5962- 9221503M2A CY54FCT 273ATLMB	Samples
CY74FCT273ATQCT	ACTIVE	SSOP	DBQ	20	2500	Green (RoHS & no Sb/Br)	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	FCT273A	Samples
CY74FCT273ATSOC	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	FCT273A	Samples
CY74FCT273ATSOCT	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	FCT273A	Samples
CY74FCT273CTQCT	ACTIVE	SSOP	DBQ	20	2500	Green (RoHS & no Sb/Br)	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	FCT273C	Samples
CY74FCT273CTSOC	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	FCT273C	Samples
CY74FCT273TQCT	ACTIVE	SSOP	DBQ	20	2500	Green (RoHS & no Sb/Br)	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	FCT273	Samples
CY74FCT273TSOC	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	FCT273	Samples
CY74FCT273TSOCT	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	FCT273	Samples

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.



### PACKAGE OPTION ADDENDUM

6-Feb-2020

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead/Ball Finish Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

# PACKAGE MATERIALS INFORMATION

www.ti.com 16-Aug-2012

## TAPE AND REEL INFORMATION

#### **REEL DIMENSIONS**

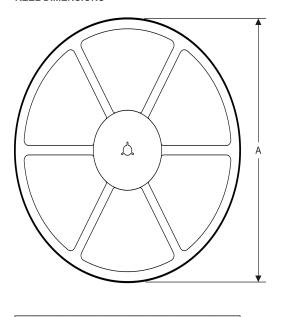

#### **TAPE DIMENSIONS**



A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### TAPE AND REEL INFORMATION

#### \*All dimensions are nominal

All dimensions are nominal												
Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CY74FCT273ATQCT	SSOP	DBQ	20	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
CY74FCT273ATSOCT	SOIC	DW	20	2000	330.0	24.4	10.8	13.0	2.7	12.0	24.0	Q1
CY74FCT273CTQCT	SSOP	DBQ	20	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
CY74FCT273TQCT	SSOP	DBQ	20	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
CY74FCT273TSOCT	SOIC	DW	20	2000	330.0	24.4	10.8	13.0	2.7	12.0	24.0	Q1

www.ti.com 16-Aug-2012



\*All dimensions are nominal

7 til diffictiolorio are florilifiai							
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
CY74FCT273ATQCT	SSOP	DBQ	20	2500	367.0	367.0	38.0
CY74FCT273ATSOCT	SOIC	DW	20	2000	367.0	367.0	45.0
CY74FCT273CTQCT	SSOP	DBQ	20	2500	367.0	367.0	38.0
CY74FCT273TQCT	SSOP	DBQ	20	2500	367.0	367.0	38.0
CY74FCT273TSOCT	SOIC	DW	20	2000	367.0	367.0	45.0

#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

Tl's products are provided subject to Tl's Terms of Sale (<a href="www.ti.com/legal/termsofsale.html">www.ti.com/legal/termsofsale.html</a>) or other applicable terms available either on ti.com or provided in conjunction with such Tl products. Tl's provision of these resources does not expand or otherwise alter Tl's applicable warranties or warranty disclaimers for Tl products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2020, Texas Instruments Incorporated