

## **KSC2335**

### High Speed, High Voltage Switching

Industrial Use



## **NPN Epitaxial Silicon Transistor**

1.Base 2.Collector 3.Emitter

## Absolute Maximum Ratings $\rm T_{C}\text{=}25^{\circ}C$ unless otherwise noted

| Symbol           | Parameter                                    | Value      | Units |
|------------------|--|------------|-------|
| V <sub>CBO</sub> | Collector-Base Voltage                       | 500        | V     |
| V <sub>CEO</sub> | Collector-Emitter Voltage                    | 400        | V     |
| V <sub>EBO</sub> | Emitter-Base Voltage                         | 7          | V     |
| I <sub>C</sub>   | Collector Current (DC)                       | 7          | Α     |
| I <sub>CP</sub>  | *Collector Current (Pulse)                   | 15         | Α     |
| I <sub>B</sub>   | Base Current (DC)                            | 3.5        | Α     |
| P <sub>C</sub>   | Collector Dissipation (T <sub>a</sub> =25°C) | 1.5        | W     |
| P <sub>C</sub>   | Collector Dissipation (T <sub>C</sub> =25°C) | 40         | W     |
| T <sub>J</sub>   | Junction Temperature                         | 150        | °C    |
| T <sub>STG</sub> | Storage Temperature                          | - 55 ~ 150 | °C    |

<sup>\*</sup> PW≤300μs, Duty Cycle≤10%

## Electrical Characteristics $T_C=25^{\circ}C$ unless otherwise noted

| Symbol   | Parameter                              | Test Condition   | Min.           | Max.     | Units |
|--|--|--|----------------|----------|-------|
| V <sub>CEO</sub> (sus)                                   | Collector-Emitter Sustaining Voltage   | $I_C = 3A$ , $I_{B1} = 0.6A$ , $L = 1mH$   | 400            |          | V     |
| V <sub>CEX</sub> (sus)1                                  | Collector-Emitter Sustaining Voltage   | $I_C = 3A$ , $I_{B1} = -I_{B2} = 0.6A$<br>$V_{BE}(off) = -5V$ , $L = 180\mu H$ , Clamped | 450            |          | V     |
| V <sub>CEX</sub> (sus)2                                  | Collector-Emitter Sustaining Voltage   | $I_C = 6A, I_{B1} = 2A, I_{B2} = -0.6A$<br>$V_{BE}(off) = -5V, L = 180\mu H, Clamped$    | 400            |          | V     |
| I <sub>CBO</sub>   | Collector Cut-off Current              | $V_{CB} = 400V, I_{E} = 0$   |                | 10       | μΑ    |
| I <sub>CER</sub>   | Collector Cut-off Current              | $V_{CE} = 400V, R_{BE} = 51\Omega @ T_{C} = 125^{\circ}C$                                |                | 1        | mA    |
| I <sub>CEX1</sub>  | Collector Cut-off Current              | $V_{CE} = 400V, V_{BE}(off) = -1.5V$   |                | 10       | μΑ    |
| I <sub>CEX2</sub>  | Collector Cut-off Current              | $V_{CE} = 400V, V_{BE}(off) = -1.5V @ T_{C} = 125^{\circ}C$                              |                | 1        | mA    |
| I <sub>EBO</sub>   | Emitter Cut-off Current                | $V_{EB} = 5V, I_{C} = 0$   |                | 10       | μΑ    |
| h <sub>FE1</sub><br>h <sub>FE2</sub><br>h <sub>FE3</sub> | * DC Current Gain                      | $V_{CE} = 5V, I_{C} = 0.1A$<br>$V_{CE} = 5V, I_{C} = 1A$<br>$V_{CE} = 5V, I_{C} = 3A$    | 20<br>20<br>10 | 80<br>80 |       |
| V <sub>CE</sub> (sat)                                    | * Collector-Emitter Saturation Voltage | $I_C = 3A, I_B = 0.6A$   |                | 1        | V     |
| V <sub>BE</sub> (sat)                                    | * Base-Emitter Saturation Voltage      | $I_C = 3A, I_B = 0.6A$   |                | 1.2      | V     |
| t <sub>ON</sub>  | Turn ON Time                           | V <sub>CC</sub> =150V, I <sub>C</sub> = 3A   |                | 1        | μs    |
| t <sub>STG</sub>   | Storage Time                           | $I_{B1} = -I_{B2} = 0.6A$  |                | 2.5      | μs    |
| t <sub>F</sub>   | Fall Time                              | $R_L = 50\Omega$   |                | 1        | μs    |

<sup>\*</sup> Pulse Test: PW≤350μs, Duty Cycle≤2% Pulsed

### **h**<sub>FF</sub> Classification

| Classification   | R       | 0       | Υ       |
|------------------|---------|---------|---------|
| h <sub>FE2</sub> | 20 ~ 40 | 30 ~ 60 | 40 ~ 80 |

# **Typical Characteristics**

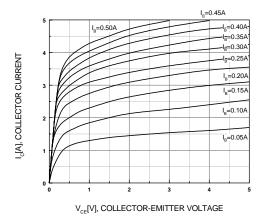


Figure 1. Static Characteristic

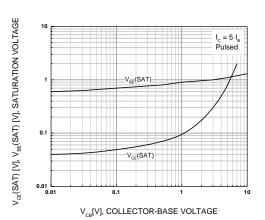


Figure 3. Base-Emitter Saturation Voltage Collector-Emitter Saturation Voltage

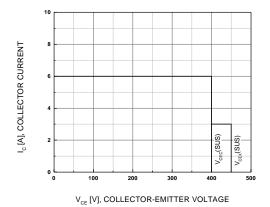


Figure 5. Reverse Bias Safe Operating Area

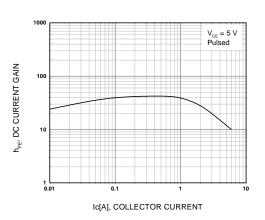


Figure 2. DC current Gain

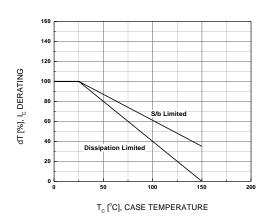


Figure 4. Derating Curve of Safe Operating Areas


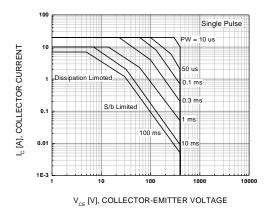



Figure 6. Forward Bias Safe Operating Area

©2001 Fairchild Semiconductor Corporation

# **Package Demensions**

# TO-220

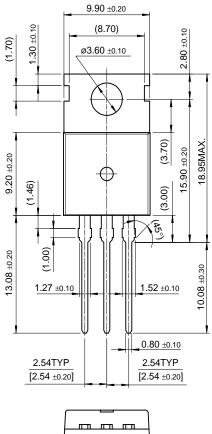

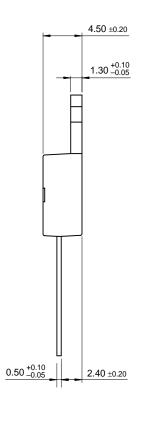

10.00 ±0.20

Dimensions in Millimeters

#### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

| ACEx™                | FAST <sup>®</sup>   | OPTOPLANAR™              | STAR*POWER™           |
|----------------------|---------------------|--------------------------|-----------------------|
| Bottomless™          | FASTr™              | PACMAN™                  | Stealth™              |
| CoolFET™             | FRFET™              | POP™                     | SuperSOT™-3           |
| $CROSSVOLT^{rM}$     | GlobalOptoisolator™ | Power247™                | SuperSOT™-6           |
| DenseTrench™         | GTO™                | PowerTrench <sup>®</sup> | SuperSOT™-8           |
| DOME™                | HiSeC™              | QFET™                    | SyncFET™              |
| EcoSPARK™            | ISOPLANAR™          | QS™                      | TruTranslation™       |
| E <sup>2</sup> CMOS™ | LittleFET™          | QT Optoelectronics™      | TinyLogic™            |
| EnSigna™             | MicroFET™           | Quiet Series™            | UHC™                  |
| FACT™                | MICROWIRE™          | SLIENT SWITCHER®         | UltraFET <sup>®</sup> |
| FACT Quiet Series™   | OPTOLOGIC™          | SMART START™             | VCX™                  |

STAR\*POWER is used under license

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### **LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:


- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### PRODUCT STATUS DEFINITIONS

#### **Definition of Terms**

| Datasheet Identification | Product Status            | Definition  |
|--------------------------|---------------------------|---|
| Advance Information      | Formative or In<br>Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.  |
| Preliminary              | First Production          | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production           | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.   |
| Obsolete                 | Not In Production         | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.   |

©2001 Fairchild Semiconductor Corporation Rev. H

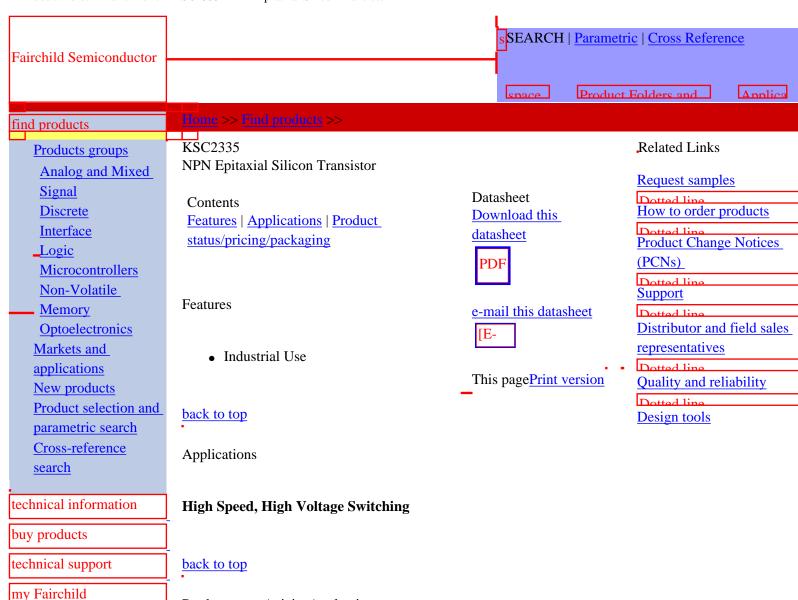

Product status/pricing/packaging

company

| Product    | Product status  | Pricing* | Package type | Leads | Packing method |
|------------|-----------------|----------|--------------|-------|----------------|
| KSC2335YTU | Full Production | \$0.495  | TO-220       | 3     | RAIL           |
| KSC2335R   | Full Production | \$0.495  | TO-220       | 3     | BULK           |
| KSC2335O   | Full Production | \$0.495  | TO-220       | 3     | BULK           |
| KSC2335RTU | Full Production | \$0.495  | TO-220       | 3     | RAIL           |
| KSC2335OTU | Full Production | \$0.495  | TO-220       | 3     | RAIL           |
| KSC2335Y   | Full Production | \$0.495  | TO-220       | 3     | BULK           |

<sup>\* 1,000</sup> piece Budgetary Pricing

back to top

<u>Home</u> | <u>Find products</u> | <u>Technical information</u> | <u>Buy products</u> | <u>Support</u> | <u>Company</u> | <u>Contact us</u> | <u>Site index</u> | <u>Privacy policy</u>

© Copyright 2002 Fairchild Semiconductor

