

DM74AS00 Quad 2-Input NAND Gate

Features


- Switching specifications at 50pF
- Switching specifications guaranteed over full temperature and V_{CC} range
- Advanced oxide-isolated, ion-implanted Schottky TTL process
- Functionally and pin for pin compatible with Schottky, low power Schottky, and advanced low power Schottky TTL counterpart
- Improved AC performance over Schottky, low power Schottky, and advanced low power Schottky counterparts

Ordering Information

Order Number	Package Number	Package Description
DM74AS00M	M14A	14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering number.

Connection Diagram



Function Table

General Description

which performs the logic NAND function.

 $\mathbf{Y} = \overline{\mathbf{AB}}$

This device contains four independent gates, each of

In	Output	
Α	В	Y
L	L	Н
L	н	Н
Н	L	Н
Н	н	L

H = HIGH Logic Level

L = LOW Logic Level

May 2007

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Rating
V _{CC}	Supply Voltage	7V
VI	Input Voltage	7V
T _A	Operating Free Air Temperature Range	0°C to +70°C
T _{STG}	Storage Temperature Range -65°C to +	
θ _{JA}	Typical Thermal Resistance	114.0°C/W

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Min.	Nom.	Max.	Units
V _{CC}	Supply Voltage	4.5	5	5.5	V
V _{IH}	HIGH Level Input Voltage	2			V
V _{IL}	LOW Level Input Voltage			0.8	V
I _{ОН}	HIGH Level Output Current			-2	mA
I _{OL}	LOW Level Output Current			20	mA
T _A	Free Air Operating Temperature	0		70	°C

Electrical Characteristics

Over recommended operating free air temperature range. All typical values are measured at $V_{CC} = 5V$, $T_A = 25^{\circ}C$.

Symbol	Parameter	Conditions		Min.	Тур.	Max.	Units
V _{IK}	Input Clamp Voltage	$V_{CC} = 4.5V, I_I = -18mA$				-1.2	V
V _{OH}	HIGH Level Output Voltage	$I_{OH} = -2mA$, $V_{CC} = 4.5V$ to 5.5V		$V_{CC} - 2$			V
V _{OL}	LOW Level Output Voltage	$V_{CC} = 4.5V, I_{OL} = 20mA$			0.35	0.5	V
I _I	Input Current at Max Input Voltage	$V_{CC} = 5.5V, V_{IH} = 7V$				0.1	mA
I _{IH}	HIGH Level Input Current	$V_{CC} = 5.5V, V_{IH} = 2.7V$				20	μA
I _{IL}	LOW Level Input Current	$V_{CC} = 5.5 V$, $V_{IL} = 0.4 V$				-0.5	mA
Ι _Ο	Output Drive Current	$V_{CC} = 5.5 V, V_{O} = 2.25 V$		-30		-112	mA
I _{CC}	Supply Current	$V_{CC} = 5.5V$	Outputs HIGH		2.2	3.2	mA
			Outputs LOW		10.8	17.4	


Switching Characteristics

Over recommended operating free air temperature range

Symbol	Parameter	Conditions	Min	Max	Units
t _{PLH}	Propagation Delay Time, LOW-to-HIGH Level Output	$V_{CC} = 4.5V$ to 5.5V, $R_L = 500\Omega$, $C_L = 50pF$	1	4.5	ns
t _{PHL}	Propagation Delay Time, HIGH-to-LOW Level Output		1	4	ns

Physical Dimensions

Dimensions are in millimeters unless otherwise noted.

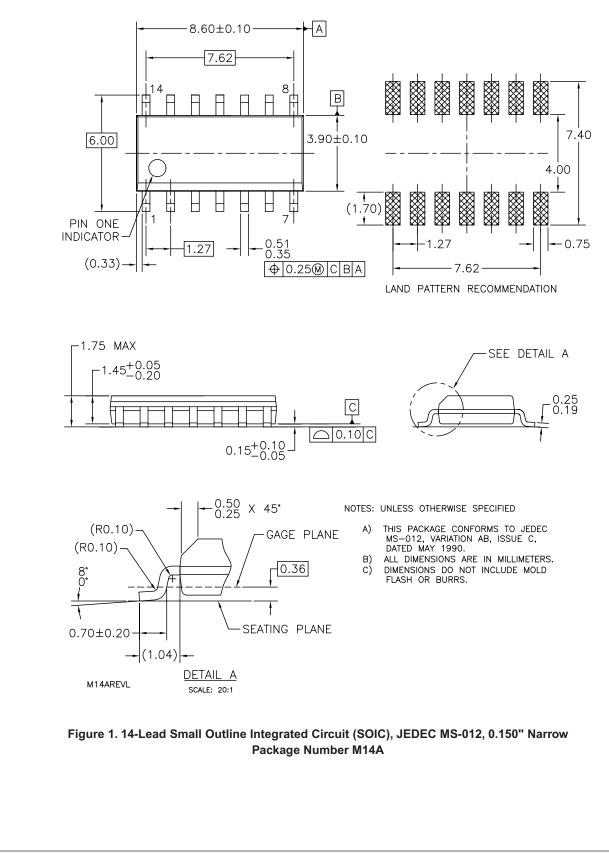



SEMICONDUCTOR

DM74AS00 Quad 2-Input NAND Gate

TRADEMARKS

The following are registered and unregistered trademarks and service marks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks

ACEx [®] Build it Now [™] CorePLUS [™] <i>CROSSVOLT</i> [™] CTL [™] Current Transfer Logic [™] EcoSPARK [®] FACT Quiet Series [™] FACT [®] FAST [®] FastvCore [™] FPS [™] FRFET [®] Global Power Resource SM Green FPS [™]	Green FPS [™] e-Series [™] GTO [™] <i>i-Lo</i> [™] IntelliMAX [™] ISOPLANAR [™] MegaBuck [™] MICROCOUPLER [™] MicroPak [™] Motion-SPM [™] OPTOLOGIC [®] OPTOPLANAR [®] PDP-SPM [™] Power220 [®] Power247 [®] POWEREDGE [®]	Power-SPM [™] PowerTrench [®] Programmable Active Droop [™] QFET [®] QS [™] QT Optoelectronics [™] Quiet Series [™] RapidConfigure [™] SMART START [™] SMART START [™] SPM [®] STEALTH [™] SuperFET [™] SuperSOT [™] -3 SuperSOT [™] -6 SuperSOT [™] -8	SyncFET TM The Power Franchise [®] ${}^{\text{TinyBoost}^{\text{TM}}}$ TinyBuck TM TinyBuck TM TinyLogic [®] TINYOPTO TM TinyPower TM TinyPWM TM TinyWire TM μ SerDes TM UHC [®] UniFET TM VCX TM
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

Rev. 128