

# DM74LS27N

Triple 3-Input NOR Gate

This device contains three independent gates each of which performs the logic NOR function.

### Rochester Electronics Manufactured Components

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All re-creations are done with the approval of the Original Component Manufacturer (OCM).

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceeds the OCM data sheet.

### **Quality Overview**

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-35835
  - Class Q Military
  - Class V Space Level
- Qualified Suppliers List of Distributors (QSLD)
  - Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OCM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.

### FOR REFERENCE ONLY

DM74LS27 Triple 3-Input NOR Gate

#### FAIRCHILD SEMICONDUCTOR

### **DM74LS27 Triple 3-Input NOR Gate**


#### **General Description**

This device contains three independent gates each of which performs the logic NOR function.

#### **Ordering Code:**

Order Number	Package Number	Package Description			
DM74LS27M	M14A	14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-120, 0.150 Narrow			
DM74LS27N	N14A	14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide			
Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.					

## **Connection Diagram**



#### **Function Table**

 $\mathbf{Y} = \overline{\mathbf{A} + \mathbf{B} + \mathbf{C}}$ 

Inputs			Output
A	В	С	Y
L	L	L	Н
х	х	н	L
х	Н	х	L
н	х	х	L

H = HIGH Logic Level L = LOW Logic Level X = Either LOW or HIGH Logic Level

www.fairchildsemi.com

#### Absolute Maximum Ratings(Note 1)

Supply Voltage	7V
Input Voltage	7V
Operating Free Air Temperature Range	$0^{\circ}C$ to $+70^{\circ}C$
Storage Temperature Range	$-65^{\circ}C$ to $+150^{\circ}C$

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

#### **Recommended Operating Conditions**

Symbol	Parameter	Min	Nom	Max	Units
V <sub>CC</sub>	Supply Voltage	4.75	5	5.25	V
VIH	HIGH Level Input Voltage	2			V
V <sub>IL</sub>	LOW Level Input Voltage			0.8	V
I <sub>OH</sub>	HIGH Level Output Current			-0.4	mA
I <sub>OL</sub>	LOW Level Output Current			8	mA
T <sub>A</sub>	Free Air Operating Temperature	0		70	°C

#### **Electrical Characteristics**

over recommended operating free air temperature range (unless otherwise noted)


Symbol	Parameter	Conditions	Min	Typ (Note 2)	Max	Units
VI	Input Clamp Voltage	$V_{CC} = Min, I_I = -18 \text{ mA}$			-1.5	V
V <sub>OH</sub>	HIGH Level Output Voltage	$V_{CC} = Min, I_{OH} = Max,$ $V_{IL} = Max$	2.7	3.4		v
V <sub>OL</sub>	LOW Level Output Voltage	$V_{CC} = Min, I_{OL} = Max,$ $V_{IH} = Min$		0.35	0.5	V
		$I_{OL} = 4 \text{ mA}, V_{CC} = Min$		0.25	0.4	
կ	Input Current @ Max Input Voltage	$V_{CC} = Max, V_I = 7V$			0.1	mA
I <sub>IH</sub>	HIGH Level Input Current	$V_{CC} = Max, V_I = 2.7V$			20	μΑ
IIL	LOW Level Input Current	$V_{CC} = Max, V_I = 0.4V$			-0.36	mA
l <sub>os</sub>	Short Circuit Output Current	V <sub>CC</sub> = Max (Note 3)	-20		-100	mA
I <sub>ССН</sub>	Supply Current with Outputs HIGH	V <sub>CC</sub> = Max	İ	2	4	mA
ICCL	Supply Current with Outputs LOW	V <sub>CC</sub> = Max		3.4	6.8	mA
Note 2: All	typicals are at $V_{CC} = 5V$ , $T_A = 25^{\circ}C$ .	•	•		•	


Note 3: Not more than one output should be shorted at a time, and the duration should not exceed one second.

#### **Switching Characteristics**

at  $V_{CC} = 5V$  and  $T_A = 25^{\circ}C$ 

	Parameter	$R_L = 2 k\Omega$				
Symbol		C <sub>L</sub> = 15 pF		C <sub>L</sub> = 50 pF		Units
		Min	Max	Min	Max	
t <sub>PLH</sub>	Propagation Delay Time LOW-to-HIGH Level Output	3	13	5	18	ns
t <sub>PHL</sub>	Propagation Delay Time HIGH-to-LOW Level Output	3	10	4	15	ns

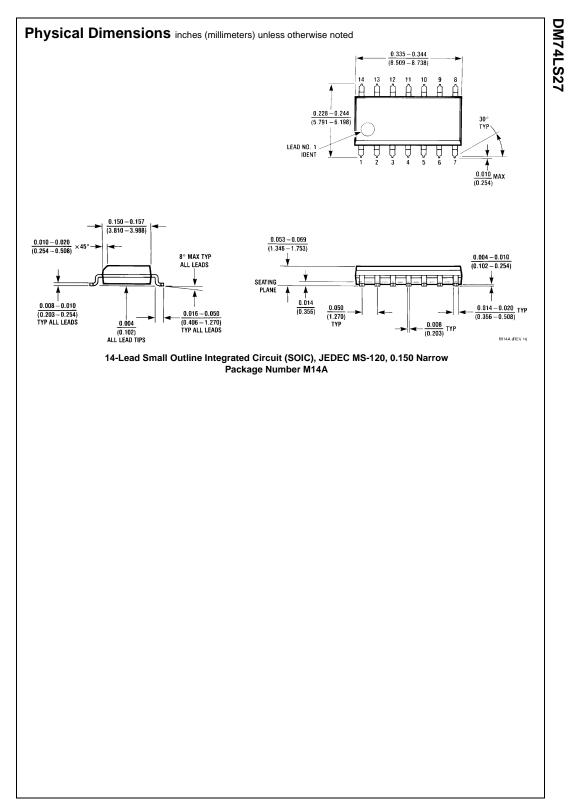

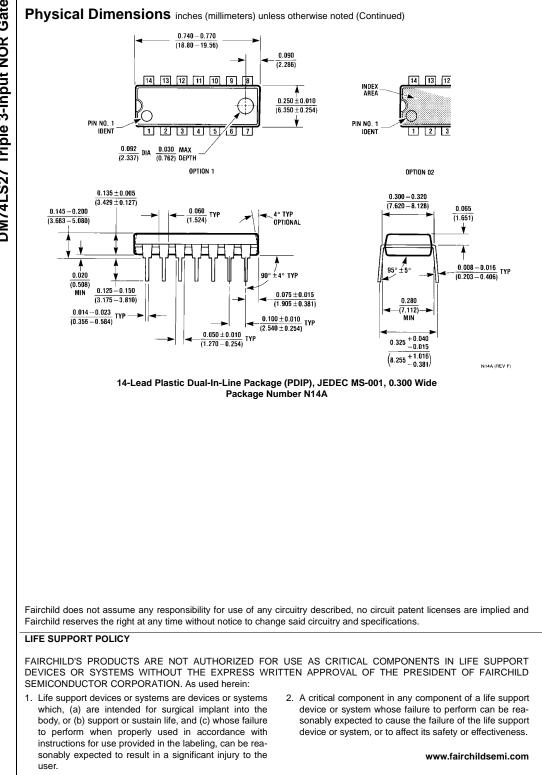

www.fairchildsemi.com