











SN74HC125

SN54HC125

SCLS104E -AUGUST 1984-REVISED DECEMBER 2015

SNx4HC125 Quadruple Bus Buffer Gates With 3-State Outputs

Features

- Wide Operating Voltage Range of 2 V to 6 V
- High-Current 3-State Outputs Interface Directly With System Bus or Can Drive Up to 15 LSTTL
- Low Power Consumption, 80-µA Maximum I_{CC}
- Typical $t_{pd} = 11 \text{ ns}$
- ±6-mA Output Drive at 5 V
- Low Input Current of 1 µA Maximum

Applications

- TV Set-Top Boxes and DVRs
- E-meters
- Smart Grids: Transmission Line Monitoring
- **Printers and Computer Peripherals**
- **Building Security: Control Panels**
- IP Phones
- Test and Measurement: Range Readers
- Smart Grids: Distribution Feeder Protection Relay

3 Description

The SNx4HC125 device is a quadruple set of bus buffer gates and features independent line drivers with 3-state outputs. The SNx4HC125 is designed for 2-V to 6-V V_{CC} operation. Each output is disabled when the associated output-enable (OE) input is high.


To ensure the high-impedance state during power up or power down, OE should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.


Device Information⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE (NOM)
SN74HC125N	PDIP (14)	18.30 mm × 6.35 mm
SN74HC125D	SOIC (14)	8.65 mm × 6.00 mm
SN74HC125W	SO (14)	10.20 mm × 5.30 mm
SN74HC125DB	SSOP (14)	6.20 mm × 5.30 mm
SN74HC125PW	TSSOP (14)	5.00 mm × 4.40 mm
SN54HC125J	CDIP (14)	19.90 mm × 6.90 mm
SN54HC125FK	LCCC (20)	8.90 mm × 8.44 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

Logic Diagram (Positive Logic)





Pin numbers shown are for the D, DB, J, N, NS, PW, and W packages.



Table of Contents

1	Features 1		6.15 Typical Characteristics	8
2	Applications 1	7	Parameter Measurement Information	9
3	Description 1	8	Detailed Description	10
4	Revision History2		8.1 Overview	10
5	Pin Configuration and Functions3		8.2 Functional Block Diagram	10
6	Specifications4		8.3 Feature Description	10
-	6.1 Absolute Maximum Ratings 4		8.4 Device Functional Modes	
	6.2 ESD Ratings 4	9	Application and Implementation	11
	6.3 Recommended Operating Conditions 4		9.1 Application Information	<mark>1</mark> 1
	6.4 Thermal Information4		9.2 Typical Application	<mark>1</mark> 1
	6.5 Electrical Characteristics, T _A = 25°C 5	10	Power Supply Recommendations	12
	6.6 Electrical Characteristics, SN54HC125 5	11	Layout	12
	6.7 Electrical Characteristics, SN74HC125 6		11.1 Layout Guidelines	12
	6.8 Switching Characteristics, T _A = 25°C, C _L = 50 pF 6		11.2 Layout Example	12
	6.9 Switching Characteristics, SN54HC125, C _L = 50 pF 6	12	Device and Documentation Support	13
	6.10 Switching Characteristics, SN74HC125, C _L = 50		12.1 Documentation Support	13
	pF7		12.2 Related Links	13
	6.11 Switching Characteristics, $T_A = 25^{\circ}C$, $C_L = 150$		12.3 Community Resources	13
	pF7		12.4 Trademarks	13
	6.12 Switching Characteristics, SN54HC125, C _L = 150 pF		12.5 Electrostatic Discharge Caution	13
	6.13 Switching Characteristics, SN74HC125, C _L = 150		12.6 Glossary	13
	pF	13	Mechanical, Packaging, and Orderable Information	13

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision D (August 2003) to Revision E


Page


- Added ESD Ratings table, Feature Description section, Device Functional Modes, Application and Implementation section, Power Supply Recommendations section, Layout section, Device and Documentation Support section, and
- Removed Ordering Information table.



5 Pin Configuration and Functions

D, DB, N, NS, J, or PW Package 14-Pin SOIC, SSOP, PDIP, SO, CDIP, or TSSOP Top View





Pin Functions⁽¹⁾

	PIN				
NAME	SOIC, SSOP, PDIP, SO, CDIP, or TSSOP	LCCC	I/O	DESCRIPTION	
1A	2	3	I	Input	
1 OE	1	2	1	Output Enable (Active Low)	
1Y	3	4	0	Output	
2A	5	8	I	Input	
2 OE	4	6	ı	Output Enable (Active Low)	
2Y	6	9	0	Output	
3A	9	13	I	Input	
3 OE	10	14	1	Output Enable (Active Low)	
3Y	8	12	0	Output	
4A	12	18	I	Input	
4 OE	13	19	I	Output Enable (Active Low)	
4Y	11	16	0	Output	
GND	7	10	_	Ground	
NC ⁽²⁾	_	1, 5, 7, 11, 15, 17	_	Not connected	
V _{CC}	14	20	_	Power	

- (1) See Mechanical, Packaging, and Orderable Information for dimensions
- (2) NC No internal connection



6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) (1)

			MIN	MAX	UNIT
V_{CC}	Supply voltage		-0.5	7	V
I _{IK}	Input clamp current ⁽²⁾	$V_I < 0$ or $V_I > V_{CC}$		±20	mA
I _{OK}	Output clamp current ⁽²⁾	$V_O < 0$ or $V_O > V_{CC}$		±20	mA
Io	Continuous output current	$V_O = 0$ to V_{CC}		±35	mA
	Continuous current through V _{CC} or GND			±70	mA
Tj	Junction temperature		-65	150	°C
T _{stg}	Storage temperature		-65	150	°C

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

			VALUE	UNIT
V	Electrostatic	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 (1)	2000	V
V _(ESD)	discharge	Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	500	V

⁽¹⁾ JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

See (1).

			MIN	NOM	MAX	UNIT
V _{CC}	Supply voltage		2	5	6	V
		V _{CC} = 2 V	1.5			
V_{IH}	/ _{IH} High-level input voltage	$V_{CC} = 4.5 \text{ V}$	3.15			V
		$V_{CC} = 6 V$	4.2			
		V _{CC} = 2 V			0.5	
V _{IL} Low-level input voltage	$V_{CC} = 4.5 \text{ V}$			1.35	V	
		$V_{CC} = 6 V$			1.8	
V_{I}	Input voltage		0		V_{CC}	V
Vo	Output voltage		0		V_{CC}	V
		V _{CC} = 2 V			1000	
Δt/Δν	Input transition rise and fall time	$V_{CC} = 4.5 \text{ V}$			500	ns
		$V_{CC} = 6 V$			400	
т	Operating free air temperature	SN54HC125	- 55	<u> </u>	125	°C
T_A	Operating free-air temperature	SN74HC125	-40		85	, C

⁽¹⁾ All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, SCBA004.

6.4 Thermal Information

			SN74LVC1G06					
THERMAL METRIC ⁽¹⁾		D (SOIC)	DB (SSOP)	N (PDIP)	NS (SOP)	PW (TSSOP)	UNIT	
		14 PINS	14 PINS	14 PINS	14 PINS	14 PINS		
$R_{\theta JA}$	Junction-to-ambient thermal resistance	86	96	80	76	113	°C/W	

For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report, SPRA953.

Submit Documentation Feedback

Copyright © 1984–2015, Texas Instruments Incorporated

⁽²⁾ The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

⁽²⁾ JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.



6.5 Electrical Characteristics, T_A = 25°C

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST	CONDITIONS	V _{cc}	MIN	TYP	MAX	UNIT
			2 V	1.9	1.998		
		$I_{OH} = -20 \mu A$	4.5 V	4.4	4.499		
V_{OH}	$V_I = V_{IH}$ or V_{IL}		6 V	5.9	5.999		V
		$I_{OH} = -6 \text{ mA}$	4.5 V	3.98	4.3		
		$I_{OH} = -7.8 \text{ mA}$	6 V	5.48	5.8		
			2 V		0.002	0.1	0.1
		$I_{OL} = 20 \mu A$	4.5 V		0.001	0.1	
V_{OL}	$V_I = V_{IH}$ or V_{IL}		6 V		0.001	0.1	V
		$I_{OL} = 6 \text{ mA}$	4.5 V		0.17	0.26	
		$I_{OL} = 7.8 \text{ mA}$	6 V		0.15	0.26	
I _I	$V_I = V_{CC}$ or 0		6 V		±0.1	±100	nA
I _{OZ}	$V_O = V_{CC}$ or 0		6 V		±0.01	±0.5	μΑ
I _{CC}	$V_I = V_{CC}$ or 0,	I _O = 0	6 V			8	μΑ
C _i			2 V to 6 V		3	10	pF

6.6 Electrical Characteristics, SN54HC125

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TES	T CONDITIONS	V _{CC}	MIN MA	X UNIT
			2 V	1.9	
		$I_{OH} = -20 \mu A$	4.5 V	4.4	
V _{OH}	$V_I = V_{IH}$ or V_{IL}		6 V	5.9	V
		$I_{OH} = -6 \text{ mA}$	4.5 V	3.7	
		$I_{OH} = -7.8 \text{ mA}$	6 V	5.2	
			2 V	0	.1
		$I_{OL} = 20 \mu A$	4.5 V	0	.1
V _{OL}	$V_I = V_{IH}$ or V_{IL}		6 V	0	.1 V
		$I_{OL} = 6 \text{ mA}$	4.5 V	0	.4
		$I_{OL} = 7.8 \text{ mA}$	6 V	0	.4
I _I	$V_I = V_{CC}$ or 0	·	6 V	±100	00 nA
I _{OZ}	$V_O = V_{CC}$ or 0		6 V	±	0 μΑ
Icc	$V_I = V_{CC}$ or 0,	I _O = 0	6 V	10	60 μΑ
C _i			2 V to 6 V		0 pF



6.7 Electrical Characteristics, SN74HC125

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST	CONDITIONS	V _{cc}	MIN	MAX	UNIT
				1.9		
		$I_{OH} = -20 \mu A$	4.5 V	4.4		
V _{OH}	$V_I = V_{IH}$ or V_{IL}		6 V	5.9		V
		$I_{OH} = -6 \text{ mA}$	4.5 V	3.84		
		$I_{OH} = -7.8 \text{ mA}$	6 V	5.34		
	I _{OL} = 20 μA		2 V		0.1	
		$I_{OL} = 20 \mu A$	4.5 V		0.1	
V _{OL}	$V_I = V_{IH}$ or V_{IL}		6 V		0.1	V
		I _{OL} = 6 mA	4.5 V		0.33	
		$I_{OL} = 7.8 \text{ mA}$	6 V		0.33	
I _I	$V_I = V_{CC}$ or 0		6 V	=	±1000	nA
l _{OZ}	$V_O = V_{CC}$ or 0		6 V		±5	μΑ
I _{CC}	$V_I = V_{CC}$ or 0,	I _O = 0	6 V		80	μA
C _i			2 V to 6 V		10	pF

6.8 Switching Characteristics, $T_A = 25$ °C, $C_L = 50$ pF

over recommended operating free-air temperature range, $C_L = 50 \text{ pF}$ (unless otherwise noted) (see Figure 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{cc}	MIN	TYP	MAX	UNIT
			2 V		48	150	
t _{pd}	Α	Y	4.5 V		14	30	ns
			6 V		11	26	
			2 V		53	150	
t _{en}	ŌĒ	Y	4.5 V		14	30	ns
			6 V		11	26	
			2 V		30	150	
t _{dis}	ŌĒ	Υ	4.5 V		15	30	ns
			6 V		14	26	
			2 V		28	75	
t _t		Any	4.5 V		8	15	ns
			6 V		6	13	

6.9 Switching Characteristics, SN54HC125, $C_L = 50 pF$

over recommended operating free-air temperature range, C_L = 50 pF (unless otherwise noted) (see Figure 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{cc}	MIN MAX	UNIT
			2 V	150	
t _{pd}	Α	Υ	4.5 V	36	ns
			6 V	25	
			2 V	180	
t _{en}	ŌĒ	Υ	4.5 V	36	ns
			6 V	31	
			2 V	180	
t _{dis}	ŌĒ	Υ	4.5 V	36	ns
			6 V	31	

Submit Documentation Feedback

Copyright © 1984–2015, Texas Instruments Incorporated



Switching Characteristics, SN54HC125, C_L = 50 pF (continued)

over recommended operating free-air temperature range, $C_L = 50 \text{ pF}$ (unless otherwise noted) (see Figure 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC}	MIN MAX	UNIT	
			2 V	90		
t _t		Any	4.5 V	18	ns	
			6 V	15		

6.10 Switching Characteristics, SN74HC125, $C_L = 50 pF$

over recommended operating free-air temperature range, C_L = 50 pF (unless otherwise noted) (see Figure 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{cc}	MIN MAX	UNIT	
			2 V	150		
t _{pd}	Α	Υ	4.5 V	30	ns	
			6 V	26		
t _{en}			2 V	150		
	ŌĒ	Υ	4.5 V	30	ns	
			6 V	26		
			2 V	150		
dis	ŌĒ	Υ	4.5 V	30	ns	
			6 V	26		
t _t			2 V	75		
		Any	4.5 V	15	ns	
			6 V	13		

6.11 Switching Characteristics, $T_A = 25^{\circ}C$, $C_L = 150 \text{ pF}$

over recommended operating free-air temperature range, C_L = 150 pF (unless otherwise noted) (see Figure 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{cc}	MIN	TYP	MAX	UNIT
			2 V		67	150	
t _{pd}	Α	Y	4.5 V		19	30	ns
			6 V		15	25	
t _{en}	ŌĒ	Y	2 V		100	135	ns
			4.5 V		20	27	
			6 V		17	23	
	· · · · · · · · · · · · · · · · · · ·		2 V		45	210	·
t _t		Any	4.5 V		17	42	ns
			6 V		13	36	

6.12 Switching Characteristics, SN54HC125, $C_L = 150 pF$

over recommended operating free-air temperature range, $C_L = 150 \text{ pF}$ (unless otherwise noted) (see Figure 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{cc}	MIN MAX	UNIT	
			2 V	225		
t _{pd}	Α	Υ	4.5 V	45	ns	
			6 V	39	1	
t _{en}			2 V	200		
	ŌĒ	Υ	4.5 V	40	ns	
			6 V	34		



Switching Characteristics, SN54HC125, C_L = 150 pF (continued)

over recommended operating free-air temperature range, $C_L = 150 \text{ pF}$ (unless otherwise noted) (see Figure 2)

PARAMETER	FROM (INPUT)			MIN MAX	UNIT
			2 V	315	
t _t		Any	4.5 V	63	ns
			6 V	53	

6.13 Switching Characteristics, SN74HC125, $C_L = 150 \text{ pF}$

over recommended operating free-air temperature range, $C_L = 150 \text{ pF}$ (unless otherwise noted) (see Figure 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{cc}	MIN MAX	UNIT
			2 V	190	
t_{pd}	Α	Υ	4.5 V	38	ns
			6 V	32	
			2 V	170	
t _{en}	ŌĒ	Υ	4.5 V	34	ns
			6 V	29	
			2 V	265	
t _t		Any	4.5 V	53	ns
			6 V	45	

6.14 Operating Characteristics

 $T_A = 25^{\circ}C$

	PARAMETER	TEST CONDITIONS	TYP	UNIT
C_{pd}	Power dissipation capacitance per gate	No load	45	pF

6.15 Typical Characteristics





Figure 1. TPD vs V_{CC} at 25°C


Submit Documentation Feedback




7 Parameter Measurement Information




PARAI	WETER	RL	CL	S1	S2
	tPZH	1 kΩ	50 pF or	Open	Closed
t _{en}	tPZL	1 K22	150 pF	Closed	Open
	tPHZ	1 kΩ	50 pF	Open	Closed
^t dis	tPLZ	1 K22	30 pr	Closed	Open
t _{pd} or	t _t		50 pF or 150 pF	Open	Open



VOLTAGE WAVEFORMS
PROPAGATION DELAY AND OUTPUT TRANSITION TIMES





VOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES FOR 3-STATE OUTPUTS

- NOTES: A. C_L includes probe and test-fixture capacitance.
 - B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
 - C. Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: PRR \leq 1 MHz, $Z_O = 50 \Omega$, $t_r = 6$ ns, $t_f = 6$ ns.
 - D. The outputs are measured one at a time with one input transition per measurement.
 - E. t_{PLZ} and t_{PHZ} are the same as t_{dis} .
 - F. tpzL and tpzH are the same as ten.
 - G. tpLH and tpHL are the same as tpd.

Figure 2. Load Circuit and Voltage Waveforms




8 Detailed Description

8.1 Overview

The SNx4HC125 offers 4 independent gate buffers capable of sinking or sourcing 6 mA at 5-V V_{CC} . Each buffer also integrates a 3-state output, or high impedance output. To enable the device's 3-state output, set the corresponding \overline{OE} input to a HIGH logic level.

Major benefits of using HC logic include both the technology's flexibility of input V_{CC} (2 V to 6 V) and high-speed capability (11 ns typical t_{pd}).

8.2 Functional Block Diagram

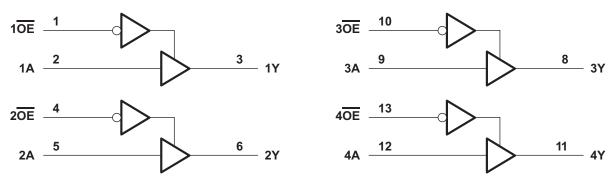

Pin numbers shown are for the D, DB, J, N, NS, PW, and W packages.

8.3 Feature Description

The 3-state outputs enable design choices such as connecting multiple outputs together, as long as the 3-state controls are used correctly. In a typical example, without 3-state outputs, if two outputs were connected to the same input on an adjacent system, and each output was trying to drive a different logic level (one HIGH, one LOW), the device could short-circuit and become damaged. With 3-state output functionality, the outputs can be configured so that when one output is driving an output signal, the others are set to high impedance and prevent any damage to the device.

8.4 Device Functional Modes

Table 1 lists the functional modes of the SNx4HC125.

Table 1. Function Table

INP	OUTPUT			
ŌĒ	Y			
L	Н	Н		
L	L	L		
Н	Х	Z		

Submit Documentation Feedback



9 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

The SNx4HC125 can be used to buffer noisy or weak input signals in order to clean up these signals and drive a strong logic level to a processor or other sampling system.

9.2 Typical Application

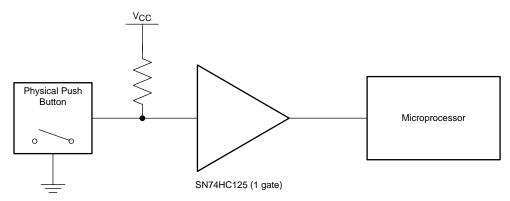


Figure 3. Typical Application Diagram

9.2.1 Design Requirements

This device uses CMOS technology and has balanced output drive. Take care to avoid bus contention because it can drive currents that would exceed maximum limits. The high drive will also create fast edges into light loads so routing and load conditions should be considered to prevent ringing.

9.2.2 Detailed Design Procedure

- 1. Recommended Input Conditions
 - Rise time and fall time specs. See $(\Delta t/\Delta V)$ in the *Recommended Operating Conditions* table.
 - Specified high and low levels. See (V_{IH} and V_{IL}) in the Recommended Operating Conditions table.
 - Inputs are overvoltage tolerant allowing them to go as high as (V_I maximum) in the Recommended
 Operating Conditions table at any valid V_{CC}.

2. Recommend Output Conditions

- Load currents should not exceed (I_O maximum) per output and should not exceed (continuous current through V_{CC} or GND) total current for the part. These limits are located in the *Absolute Maximum Ratings* table.
- Outputs should not be pulled above V_{CC}.

Typical Application (continued)

9.2.3 Application Curve

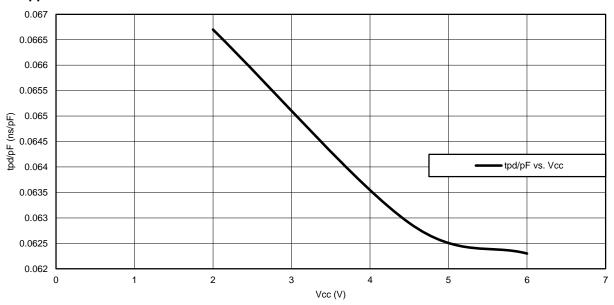


Figure 4. tpd/pF vs V_{CC} at 25°C

10 Power Supply Recommendations

The power supply can be any voltage between the minimum and maximum supply voltage rating located in the *Recommended Operating Conditions* table.

Each V_{CC} pin should have a good bypass capacitor to prevent power disturbance. For devices with a single supply, a 0.1- μ F capacitor is recommended and if there are multiple V_{CC} pins then a 0.01- μ F or 0.022- μ F capacitor is recommended for each power pin. It is ok to parallel multiple bypass caps to reject different frequencies of noise. 0.1- μ F and 1- μ F capacitors are commonly used in parallel. The bypass capacitor should be installed as close to the power pin as possible for best results.

11 Layout

11.1 Layout Guidelines

When using multiple bit logic devices inputs must not ever float. In many cases, functions or parts of functions of digital logic devices are unused; for example, when only two inputs of a triple-input AND gate are used or only 3 of the 4 buffer gates are used. Such input pins must not be left unconnected because the undefined voltages at the outside connections result in undefined operational states. Specified below are the rules that must be observed under all circumstances. All unused inputs of digital logic devices must be connected to a high or low bias to prevent them from floating. The logic level that should be applied to any particular unused input depends on the function of the device. Generally they will be tied to GND or V_{CC} whichever make more sense or is more convenient.

11.2 Layout Example



Figure 5. Layout Diagram

Submit Documentation Feedback



12 Device and Documentation Support

12.1 Documentation Support

12.1.1 Related Documentation

For related documentation, see the following:

- Implications of Slow or Floating CMOS Inputs, SCBA004.
- Introduction to Logic, SLVA700

12.2 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

Table 2. Related Links

PARTS	PRODUCT FOLDER	SAMPLE & BUY	TECHNICAL DOCUMENTS	TOOLS & SOFTWARE	SUPPORT & COMMUNITY
SN54HC125	Click here	Click here	Click here	Click here	Click here
SN74HC125	Click here	Click here	Click here	Click here	Click here

12.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community T's Engineer-to-Engineer (E2E) Community. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.4 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

12.5 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

12.6 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical packaging and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser based versions of this data sheet, refer to the left hand navigation.

Copyright © 1984–2015, Texas Instruments Incorporated





6-Feb-2020

PACKAGING INFORMATION

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
5962-87721012A	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type	-55 to 125	5962- 87721012A SNJ54HC 125FK	Samples
5962-8772101CA	ACTIVE	CDIP	J	14	1	TBD	Call TI	N / A for Pkg Type	-55 to 125	5962-8772101CA SNJ54HC125J	Samples
SN54HC125J	ACTIVE	CDIP	J	14	1	TBD	Call TI	N / A for Pkg Type	-55 to 125	SN54HC125J	Samples
SN74HC125D	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC125	Samples
SN74HC125DBR	ACTIVE	SSOP	DB	14	2000	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC125	Samples
SN74HC125DE4	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC125	Samples
SN74HC125DR	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	NIPDAU SN	Level-1-260C-UNLIM	-40 to 85	HC125	Samples
SN74HC125DRE4	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC125	Samples
SN74HC125DRG4	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC125	Samples
SN74HC125DT	ACTIVE	SOIC	D	14	250	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC125	Samples
SN74HC125N	ACTIVE	PDIP	N	14	25	Green (RoHS & no Sb/Br)	NIPDAU	N / A for Pkg Type	-40 to 85	SN74HC125N	Samples
SN74HC125NE4	ACTIVE	PDIP	N	14	25	Green (RoHS & no Sb/Br)	NIPDAU	N / A for Pkg Type	-40 to 85	SN74HC125N	Samples
SN74HC125NSR	ACTIVE	SO	NS	14	2000	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC125	Samples
SN74HC125NSRE4	ACTIVE	SO	NS	14	2000	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC125	Samples
SN74HC125NSRG4	ACTIVE	SO	NS	14	2000	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC125	Samples
SN74HC125PWR	ACTIVE	TSSOP	PW	14	2000	Green (RoHS & no Sb/Br)	NIPDAU SN	Level-1-260C-UNLIM	-40 to 85	HC125	Samples



PACKAGE OPTION ADDENDUM

6-Feb-2020

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead/Ball Finish (6)	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
SN74HC125PWRE4	ACTIVE	TSSOP	PW	14	2000	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC125	Samples
SN74HC125PWRG4	ACTIVE	TSSOP	PW	14	2000	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC125	Samples
SN74HC125PWT	ACTIVE	TSSOP	PW	14	250	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC125	Samples
SNJ54HC125FK	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type	-55 to 125	5962- 87721012A SNJ54HC 125FK	Samples
SNJ54HC125J	ACTIVE	CDIP	J	14	1	TBD	Call TI	N / A for Pkg Type	-55 to 125	5962-8772101CA SNJ54HC125J	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead/Ball Finish Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.



PACKAGE OPTION ADDENDUM

6-Feb-2020

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF SN54HC125, SN74HC125:

Automotive: SN74HC125-Q1, SN74HC125-Q1

Military: SN54HC125


NOTE: Qualified Version Definitions:

- Catalog TI's standard catalog product
- Automotive Q100 devices qualified for high-reliability automotive applications targeting zero defects
- Military QML certified for Military and Defense Applications

PACKAGE MATERIALS INFORMATION

www.ti.com 16-Oct-2019

TAPE AND REEL INFORMATION

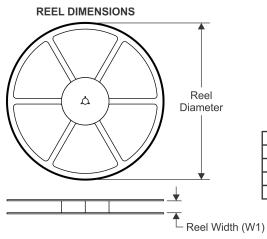



	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74HC125DR	SOIC	D	14	2500	330.0	16.8	6.5	9.5	2.1	8.0	16.0	Q1
SN74HC125DR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74HC125DRG4	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74HC125DT	SOIC	D	14	250	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74HC125NSR	SO	NS	14	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1
SN74HC125PWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74HC125PWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74HC125PWRG4	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74HC125PWT	TSSOP	PW	14	250	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

www.ti.com 16-Oct-2019



*All dimensions are nominal

7 III di non di controlla di co									
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)		
SN74HC125DR	SOIC	D	14	2500	364.0	364.0	27.0		
SN74HC125DR	SOIC	D	14	2500	367.0	367.0	38.0		
SN74HC125DRG4	SOIC	D	14	2500	367.0	367.0	38.0		
SN74HC125DT	SOIC	D	14	250	210.0	185.0	35.0		
SN74HC125NSR	SO	NS	14	2000	367.0	367.0	38.0		
SN74HC125PWR	TSSOP	PW	14	2000	364.0	364.0	27.0		
SN74HC125PWR	TSSOP	PW	14	2000	367.0	367.0	35.0		
SN74HC125PWRG4	TSSOP	PW	14	2000	367.0	367.0	35.0		
SN74HC125PWT	TSSOP	PW	14	250	367.0	367.0	35.0		

FK (S-CQCC-N**)

LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a metal lid.
- D. Falls within JEDEC MS-004



MECHANICAL DATA

NS (R-PDSO-G**)

14-PINS SHOWN

PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



N (R-PDIP-T**)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



DB (R-PDSO-G**)

PLASTIC SMALL-OUTLINE

28 PINS SHOWN



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-150

CERAMIC DUAL IN LINE PACKAGE



Images above are just a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

4040083-5/G





CERAMIC DUAL IN LINE PACKAGE



- 1. All controlling linear dimensions are in inches. Dimensions in brackets are in millimeters. Any dimension in brackets or parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This package is hermitically sealed with a ceramic lid using glass frit.
- His package is remitted by sealed with a ceramic its using glass mit.
 Index point is provided on cap for terminal identification only and on press ceramic glass frit seal only.
 Falls within MIL-STD-1835 and GDIP1-T14.



CERAMIC DUAL IN LINE PACKAGE



D (R-PDSO-G14)

PLASTIC SMALL OUTLINE



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.



D (R-PDSO-G14)

PLASTIC SMALL OUTLINE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE



- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M—1994.
- B. This drawing is subject to change without notice.
 - Sody length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
- E. Falls within JEDEC MO-153



PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

Tl's products are provided subject to Tl's Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such Tl products. Tl's provision of these resources does not expand or otherwise alter Tl's applicable warranties or warranty disclaimers for Tl products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2020, Texas Instruments Incorporated