

# 256K (32K x 8) Static RAM

### Features


- Temperature Ranges
  - □ Commercial: 0°C to 70°C
- □ Industrial: –40°C to 85°C
- □ Automotive-A: -40°C to 85°C
- □ Automotive-E: –40°C to 125°C
- Speed: 70 ns
- Low Voltage Range: 2.7V to 3.6V
- Low Active Power and Standby Power
- Easy Memory Expansion with CE and OE Features
- TTL Compatible Inputs and Outputs
- Automatic Power Down when Deselected
- CMOS for Optimum Speed and Power
- Available in Standard Pb-free and non Pb-free 28-Pin (300-mil) Narrow SOIC, 28-Pin TSOP-I, and 28-Pin Reverse TSOP-I Packages

### **Functional Description**

The CY62256VN<sup>[1]</sup> family is composed of two high performance CMOS static RAM's organized as 32K words by 8 bits. Easy memory expansion is provided by an <u>active LOW</u> chip enable  $(\overline{CE})$  and active LOW output enable  $(\overline{OE})$  and tristate drivers. These devices have an automatic power down feature, reducing the power consumption by over 99% when deselected.

An active LOW write enable signal ( $\overline{\text{WE}}$ ) controls the writing/reading operation of the memory. When  $\overline{\text{CE}}$  and  $\overline{\text{WE}}$  inputs are both LOW, data on the eight data input/output pins ( $I/O_0$  through  $I/O_7$ ) is written into the memory location addressed by the address present on the address pins ( $A_0$  through  $A_{14}$ ). Reading the device is accomplished by selecting the device and enabling the outputs,  $\overline{\text{CE}}$  and  $\overline{\text{OE}}$  active LOW, while  $\overline{\text{WE}}$  remains inactive or HIGH. Under these conditions, the contents of the location addressed by the information on address pins are present on the eight data input/output pins.

The input/output pins remain in a high impedance state un<u>less</u> the chip is selected, outputs are enabled, and write enable (WE) is HIGH.

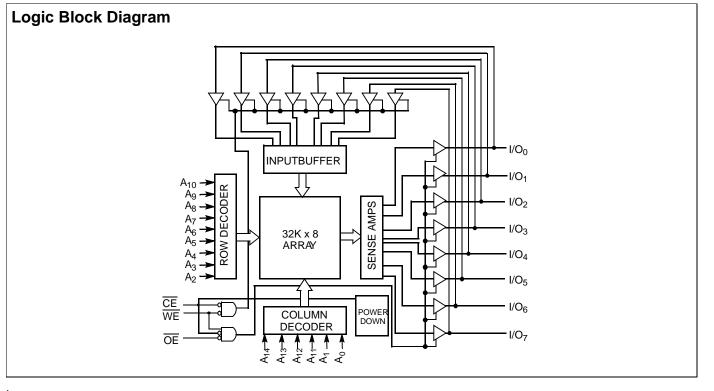

1. For best practice recommendations, refer to the Cypress application note "System Design Guidelines" on http://www.cypress.com.

**Cypress Semiconductor Corporation** Document Number : 001-06512 Rev. \*C

Note

198 Champion Court

San Jose, CA 95134-1709 • 408-943-2600 Revised March 24, 2010




## **Product Portfolio**

		V <sub>CC</sub> Range (V)		Power Dissipation					
Product	uct Range V <sub>CC</sub> Ra		C Kange (			Operating, I <sub>CC</sub> (mA)		Standby, I <sub>SB2</sub> (μA)	
		Min	<b>Typ</b> <sup>[2]</sup>	Max	<b>Typ</b> <sup>[2]</sup>	Max	<b>Typ</b> <sup>[2]</sup>	Max	
CY62256VNLL	Com'l	2.7	3.0	3.6	11	30	0.1	5	
CY62256VNLL	Ind'I	2.7	3.0	3.6	11	30	0.1	10	
CY62256VNLL	Automotive-A	2.7	3.0	3.6	11	30	0.1	10	
CY62256VNLL	Automotive-E	2.7	3.0	3.6	11	30	0.1	130	

### **Pin Configurations**

Narrow SOIC

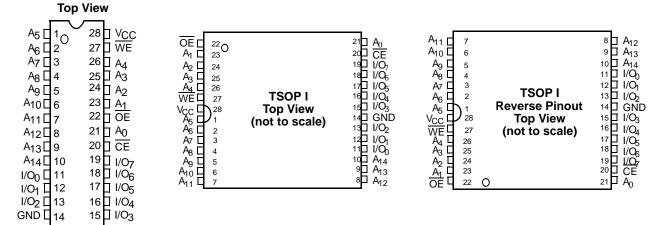

### **Pin Definitions**

Pin Number	Туре	Description		
1–10, 21, 23–26	Input	A <sub>0</sub> -A <sub>14</sub> . Address Inputs		
11–13, 15–19	Input/Output	<b>O<sub>0</sub>–I/O<sub>7</sub></b> . Data lines. Used as input or output lines depending on operation		
27	Input/Control	WE. When selected LOW, a WRITE is conducted. When selected HIGH, a READ is conducted		
20	Input/Control	CE. When LOW, selects the chip. When HIGH, deselects the chip		
22	Input/Control	<b>OE</b> . Output Enable. Controls the direction of the I/O pins. When LOW, the I/O pins behave as outputs. When deasserted HIGH, I/O pins are tristated, and act as input data pins		
14	Ground	GND. Ground for the device		
28	Power Supply	V <sub>CC</sub> . Power supply for the device		

#### Note

2. Typical values are included for reference only and are not guaranteed or tested. Typical values are measured at V<sub>CC</sub> = V<sub>CC</sub> Typ, T<sub>A</sub> = 25°C, and t<sub>AA</sub> = 70 ns.



# **Maximum Ratings**

Exceeding maximum ratings may impair the useful life of the device. These user guidelines are not tested.

Storage Temperature	–65°C to + 150°C
Ambient Temperature with Power Applied	–55°C to + 125°C
Supply Voltage to Ground Potential (Pin 28 to Pin 14)	–0.5V to + 4.6V
DC Voltage Applied to Outputs in High-Z State <sup>[3]</sup>	–0.5V to V <sub>CC</sub> + 0.5V
DC Input Voltage <sup>[3]</sup>	
Output Current into Outputs (LOW)	

Static Discharge Voltage	> 2001V
(per MIL-STD-883, Method 3015)	

Latch-up Current...... > 200 mA

# **Operating Range**

Device	Range	Ambient Temperature (T <sub>A</sub> ) <sup>[4]</sup>	v <sub>cc</sub>
CY62256VN	Commercial	0°C to +70°C	2.7V to 3.6V
	Industrial	-40°C to +85°C	
	Automotive-A	-40°C to +85°C	
	Automotive-E	–40°C to +125°C	

## Electrical Characteristics Over the Operating Range

Deremeter	Description	Test Conditions –			Unit		
Parameter	Description			Min	<b>Typ</b> <sup>[2]</sup>	Max	Unit
V <sub>OH</sub>	Output HIGH Voltage	I <sub>OH</sub> = -1.0 mA	$V_{CC} = 2.7V$	2.4			V
V <sub>OL</sub>	Output LOW Voltage	I <sub>OL</sub> = 2.1 mA	$V_{CC} = 2.7V$			0.4	V
V <sub>IH</sub>	Input HIGH Voltage			2.2		$V_{CC}$ + 0.3V	V
V <sub>IL</sub>	Input LOW Voltage			-0.5		0.8	V
I <sub>IX</sub>	Input Leakage Current	$GND \le V_{IN} \le V_{CC}$	Com'l/Ind'l/Auto-A	-1		+1	μA
			Auto-E	-10		+10	μA
I <sub>OZ</sub>	Output Leakage Current	GND <u>&lt;</u> V <sub>IN</sub> <u>&lt;</u> V <sub>CC</sub> , Output	Com'l/Ind'l/Auto-A	-1		+1	μA
		Disabled	Auto-E	-10		+10	μA
I <sub>CC</sub>	V <sub>CC</sub> Operating Supply Current	$V_{CC} = 3.6V, I_{OUT} = 0 \text{ mA},$ f = f <sub>MAX</sub> = 1/t <sub>RC</sub>	All Ranges		11	30	mA
I <sub>SB1</sub>	Automatic CE Power Down Current - TTL Inputs		All Ranges		100	300	μA
I <sub>SB2</sub>	Automatic CE Power	$V_{CC} = 3.6V, \overline{CE} \ge V_{CC} - 0.3V$	Com'l		0.1	5	μA
	Down Current- CMOS Inputs	$V_{IN} \ge V_{CC} - 0.3V \text{ or } V_{IN} \le 0.3V,$ f = 0	Ind'l/Auto-A			10	
			Auto-E			130	

Notes

3.  $V_{IL}$  (min) = -2.0V for pulse durations of less than 20 ns. 4.  $T_A$  is the "Instant-On" case temperature.




# Capacitance<sup>[5]</sup>

Parameter	Description	Description Test Conditions		Unit
C <sub>IN</sub>	Input Capacitance	$T_{A} = 25^{\circ}C, f = 1 \text{ MHz},$	6	pF
C <sub>OUT</sub>	Output Capacitance	$V_{\rm CC} = 3.0V$	8	pF

### Thermal Resistance<sup>[5]</sup>

Parameter	Description	Test Conditions	SOIC	TSOPI	RTSOPI	Unit
$\Theta_{JA}$	Thermal Resistance (Junction to Ambient)	Still Air, soldered on a 3 × 4.5 inch, two-layer printed circuit board	68.45	87.62	87.62	°C/W
Θ <sub>JC</sub>	Thermal Resistance (Junction to Case)		26.94	23.73	23.73	°C/W



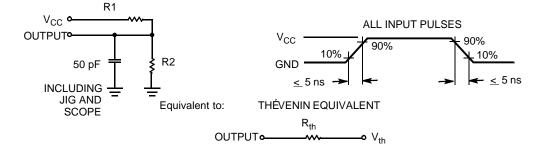


Parameter	Value	Units
R1	1100	Ohms
R2	1500	Ohms
RTH	645	Ohms
VTH	1.750	Volts

### Data Retention Characteristics (Over the Operating Range)

Parameter	Description	Conditions <sup>[6]</sup>		Min	<b>Typ</b> <sup>[2]</sup>	Max	Unit
V <sub>DR</sub>	V <sub>CC</sub> for Data Retention			1.4			V
I <sub>CCDR</sub>	Data Retention Current	$\underline{V}_{CC} = 1.4V,$	Com'l		0.1	3	μA
			Ind'l/Auto-A			6	
		or $V_{IN} \le 0.3V$	Auto-E			50	
t <sub>CDR</sub> <sup>[6]</sup>	Chip Deselect to Data Retention Time		·	0			ns
t <sub>R</sub> <sup>[5]</sup>	Operation Recovery Time			t <sub>RC</sub>			ns

#### Figure 2. Data Retention Waveform



#### Notes

5. Tested initially and after any design or process changes that may affect these parameters. 6. No input may exceed  $V_{CC}$  + 0.3V.



### Switching Characteristics Over the Operating Range<sup>[7]</sup>


Devenueter	Description	CY6225	56VN-70	Unit
Parameter	Description	Min	Max	Unit
Read Cycle		·		
t <sub>RC</sub>	Read Cycle Time	70		ns
t <sub>AA</sub>	Address to Data Valid		70	ns
t <sub>OHA</sub>	Data Hold from Address Change	10		ns
t <sub>ACE</sub>	CE LOW to Data Valid		70	ns
t <sub>DOE</sub>	OE LOW to Data Valid		35	ns
t <sub>LZOE</sub>	OE LOW to Low-Z <sup>[8]</sup>	5		ns
t <sub>HZOE</sub>	OE HIGH to High-Z <sup>[8, 9]</sup>		25	ns
t <sub>LZCE</sub>	CE LOW to Low-Z <sup>[8]</sup>	10		ns
t <sub>HZCE</sub>	CE HIGH to High-Z <sup>[8, 9]</sup>		25	ns
t <sub>PU</sub>	CE LOW to Power Up	0		ns
t <sub>PD</sub>	CE HIGH to Power Down		70	ns
Write Cycle <sup>[10, 11]</sup>		·		
t <sub>WC</sub>	Write Cycle Time	70		ns
t <sub>SCE</sub>	CE LOW to Write End	60		ns
t <sub>AW</sub>	Address Setup to Write End	60		ns
t <sub>HA</sub>	Address Hold from Write End	0		ns
t <sub>SA</sub>	Address Setup to Write Start	0		ns
t <sub>PWE</sub>	WE Pulse Width	50		ns
t <sub>SD</sub>	Data Setup to Write End	30		ns
t <sub>HD</sub>	Data Hold from Write End	0		ns
t <sub>HZWE</sub>	WE LOW to High-Z <sup>[8, 9]</sup>		25	ns
t <sub>LZWE</sub>	WE HIGH to Low-Z <sup>[8]</sup>	10		ns

Notes


Notes
7. Test conditions assume signal transition time of 5 ns or less timing reference levels of V<sub>CC</sub>/2, input pulse levels of 0 to V<sub>CC</sub>, and output loading of the specified I<sub>OL</sub>/I<sub>OH</sub> and 100-pF load capacitance.
8. At any given temperature and voltage condition, t<sub>HZCE</sub> is less than t<sub>LZCE</sub>, t<sub>HZOE</sub> is less than t<sub>LZOE</sub>, and t<sub>HZWE</sub> is less than t<sub>LZWE</sub> for any given device.
9. t<sub>HZOE</sub>, t<sub>HZCE</sub>, and t<sub>HZWE</sub> are specified with C<sub>L</sub> = 5 pF as in (b) of <u>AC</u> Test Loads. Transition is measured ± 200 mV from steady-state voltage.
10. The internal write time of the memory is defined by the overlap of <u>CE</u> LOW and <u>WE</u> LOW. Both signals must be LOW to initiate a write and either signal can terminate a write by going HIGH. The data input set-up and hold timing should be referenced to the rising edge of the signal that terminates the write.
11. The minimum write cycle time for write cycle #3 (WE controlled, OE LOW) is the sum of t<sub>HZWE</sub> and t<sub>SD</sub>.





### Switching Waveforms

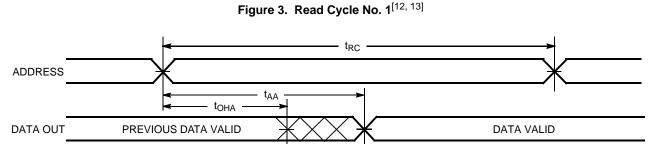



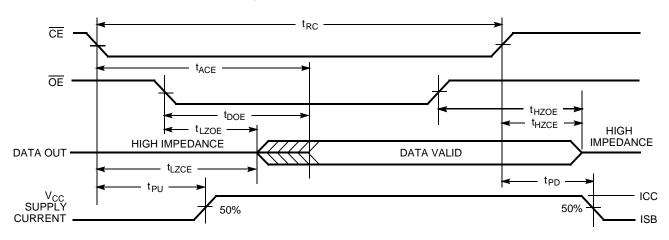



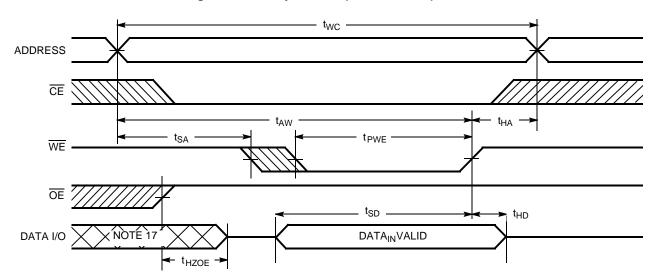

#### Notes

- 12. Device is continuously selected.  $\overline{OE}$ ,  $\overline{CE} = V_{IL}$ .
- 13. WE is HIGH for read cycle.
- 14. Address valid prior to or coincident with CE transition LOW.
- 15. Data I/O is high impedance if  $\overline{OE} = V_{IH}$ . 16. If  $\overline{OE}$  goes HIGH simultaneously with WE HIGH, the output remains in a high impedance state.
- 17. During this period, the I/Os are in output state and input signals should not be applied.



### Switching Waveforms (continued)



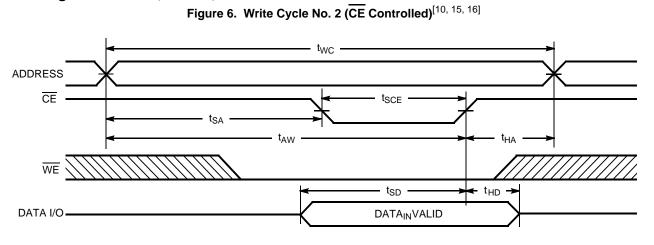


Figure 7. Write Cycle No. 3 ( $\overline{\text{WE}}$  Controlled,  $\overline{\text{OE}}$  LOW)<sup>[11, 16]</sup>



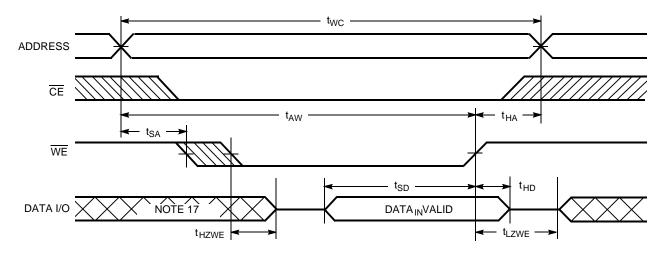



# **Typical DC and AC Characteristics**

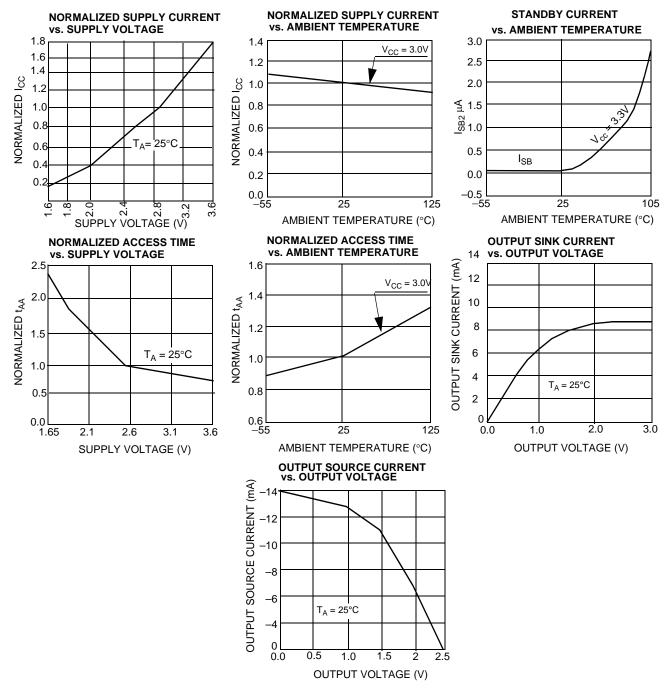



# Typical DC and AC Characteristics (continued)





### Truth Table

CE	WE	OE	Inputs/Outputs	Mode	Power
Н	Х	Х	High-Z	Deselect/Power Down	Standby (I <sub>SB</sub> )
L	Н	L	Data Out	Read	Active (I <sub>CC</sub> )
L	L	Х	Data In	Write	Active (I <sub>CC</sub> )
L	Н	Н	High-Z	Deselect, Output Disabled	Active (I <sub>CC</sub> )

## **Ordering Information**

Speed (ns)	Ordering Code	Package Diagram	Package Type	Operating Range
70	CY62256VNLL-70SNC	51-85092	28-Pin (300-mil) Narrow SOIC	Commercial
	CY62256VNLL-70SNXC		28-Pin (300-mil) Narrow SOIC (Pb-Free)	
	CY62256VNLL-70ZC	51-85071	28-Pin TSOP I	
	CY62256VNLL-70ZXC		28-Pin TSOP I (Pb-Free)	
	CY62256VNLL-70SNXI	51-85092	28-Pin (300-mil) Narrow SOIC (Pb-Free)	Industrial
	CY62256VNLL-70ZI	51-85071	28-Pin TSOP I	
	CY62256VNLL-70ZXI		28-Pin TSOP I (Pb-Free)	
	CY62256VNLL-70ZRI	51-85074	28-Pin Reverse TSOP I	
	CY62256VNLL-70ZRXI		28-Pin Reverse TSOP I (Pb-Free)	
	CY62256VNLL-70SNXE	51-85092	28-Pin (300-mil) Narrow SOIC (Pb-Free)	Automotive-E
	CY62256VNLL-70ZXE	51-85071	28-Pin TSOP I (Pb-Free)	

Contact your local Cypress sales representative for availability of other parts



### **Package Diagrams**



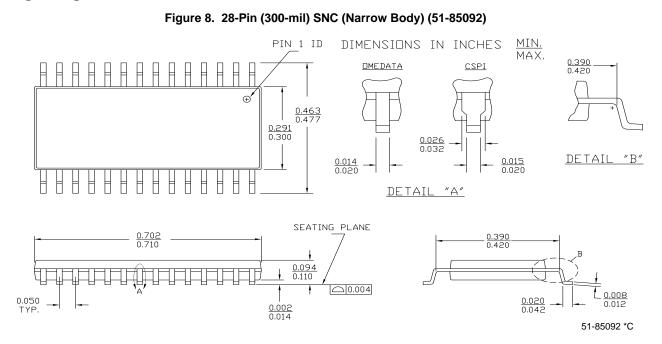


Figure 9. 28-Pin TSOP 1 (8 × 13.4 mm) (51-85071)

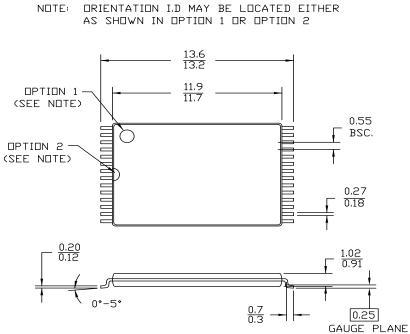




DIMENSION IN MM MAX. MIN.

51-85071 \*H



#### Figure 10. 28-Pin Reverse TSOP 1 (8 × 13.4 mm) (51-85074)

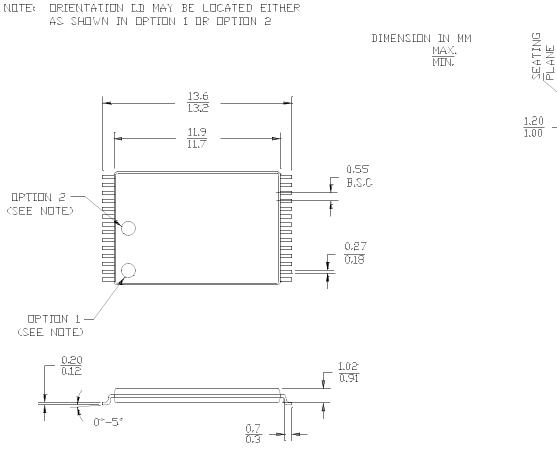

0,10

(]

 $\frac{0.20}{0.05}$ 

51-85074-\*F



### **Document History Page**

Document Title: CY62256VN 256K (32K x 8) Static RAM Document Number: 001-06512							
Rev.	ECN No.	Submission Date	Orig. of Change	Description of Change			
**	426504	See ECN	NXR	New Data Sheet			
*A	488954	See ECN		Added Automotive product Updated ordering Information table			
*В	2769239	09/25/09	VKN/AESA	Corrected V <sub>IL</sub> description in the Electrical Characteristics table			
*C	2901521	03/30/2010		Removed inactive parts from Ordering Information. Updated Package Diagram			

### Sales, Solutions, and Legal Information

#### Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturers representatives, and distributors. To find the office closest to you, visit us at cypress.com/sales.

#### Products

PSoC	psoc.cypress.com
Clocks & Buffers	clocks.cypress.com
Wireless	wireless.cypress.com
Memories	memory.cypress.com
Image Sensors	image.cypress.com

© Cypress Semiconductor Corporation, 2006-2010. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.

Document Number : 001-06512 Rev. \*C

#### Revised March 24, 2010

Page 12 of 12

All products and company names mentioned in this document may be the trademarks of their respective holders.