
Quad Line Receiver


The MC10115 is a quad differential amplifier designed for use in sensing differential signals over long lines. The base bias supply (V_{BB}) is made available at pin 9 to make the device useful as a Schmitt trigger, or in other applications where a stable reference voltage is necessary.

Active current sources provide the MC10115 with excellent common mode noise rejection. If any amplifier in a package is not used, one input of that amplifier must be connected to V_{BB} (pin 9) to prevent upsetting the current source bias network.

- $P_D = 110 \text{ mW typ/pkg}$ (No Load)
- $t_{pd} = 2.0$ ns typ
- t_r , $t_f = 2.0$ ns typ (20%-80%)




 $^{*}V_{BB}$ to be used to supply bias to the MC10115 only and bypassed (when used) with 0.01 μF to 0.1 μF capacitor to ground (0 V). V_{BB} can source < 1.0 mA. When the input pin with the bubble goes positive, the output goes negative.





ON Semiconductor

http://onsemi.com



WL = Wafer Lot YY = Year

WW = Work Week

ORDERING INFORMATION

Device	Package	Shipping			
MC10115L	CDIP-16	25 Units / Rail			
MC10115P	PDIP-16	25 Units / Rail			
MC10115FN	PLCC-20	46 Units / Rail			


ELECTRICAL CHARACTERISTICS

			Test Limits							
		Pin Under	-30	–30°C		+25°C		+85	+85°C	
Characteristic	Symbol	Test	Min	Max	Min	Тур	Max	Min	Max	Unit
Power Supply Drain Current	Ι _Ε	8		29			26		29	mAdc
Input Current	I _{inH}	4		150			95		95	μAdc
	I _{CBO}	4		1.5			1.0		1.0	μAdc
Output Voltage Logic 1	V _{OH}	2	-1.060	-0.890	-0.960		-0.810	-0.890	-0.700	Vdc
Output Voltage Logic 0	V _{OL}	2	-1.890	-1.675	-1.850		-1.650	-1.825	-1.615	Vdc
Threshold Voltage Logic 1	V _{OHA}	2	-1.080		-0.980			-0.910		Vdc
Threshold Voltage Logic 0	V _{OLA}	2		-1.655			-1.630		-1.595	Vdc
Reference Voltage	V _{BB}	9	1.420	1.280	-1.350		-1.230	1.295	-1.150	Vdc
Switching Times (50 Ω Load)										ns
Propagation Delay	t ₄₋₂₊ t ₄₊₂₋	2 2	1.0 1.0	3.1 3.1	1.0 1.0		2.9 2.9	1.0 1.0	3.3 3.3	
Rise Time (20 to 80%)	t ₂₊	2	1.1	3.6	1.1		3.3	1.1	3.7	
Fall Time (20 to 80%)	t ₂₋	2	1.1	3.6	1.1		3.3	1.1	3.7	
ELECTRICAL CHARACTERISTICS (continued)										

ELECTRICAL CHARACTERISTICS (continued)


			TEST VOLTAGE VALUES (Volts)							
	@ Test Temperature		V _{IHmax}	VILmin	V _{IHAmin}	VILAmax	V _{BB}	V _{EE}		
–30°C +25°C +85°C			-0.890	-1.890	-1.205	-1.500	From	-5.2		
			-0.810	-1.850	-1.105	-1.475	Pin 9	-5.2		
			-0.700	-1.825	-1.035	-1.440		-5.2		
		Pin TEST VOLTAGE APPLIED TO PINS LISTE					STED BELC	DBELOW		
Characteristic	Symbol	Under Test	V _{IHmax}	V _{ILmin}	V _{IHAmin}	V _{ILAmax}	V _{BB}	V _{EE}	(V _{CC}) Gnd	
Power Supply Drain Current	Ι _Ε	8		4,7,10,13			5,6,11,12	8	1, 16	
Input Current	l _{inH}	4	4	7,10,13			5,6,11,12	8	1, 16	
	I _{CBO}	4		7,10,13			5,6,11,12	8,4	1, 16	
Output Voltage Logic 1	V _{OH}	2	7,10,13	4			5,6,11,12	8	1, 16	
Output Voltage Logic 0	V _{OL}	2	4	7,10,13			5,6,11,12	8	1, 16	
Threshold Voltage Logic 1	V _{OHA}	2		7,10,13		4	5,6,11,12	8	1, 16	
Threshold Voltage Logic 0	V _{OLA}	2		7,10,13	4		5,6,11,12	8	1, 16	
Reference Voltage	V _{BB}	9					5,6,11,12	8	1, 16	
Switching Times (50Ω Load)			Pulse In		Pulse Out			–3.2 V	+2.0 V	
Propagation Delay	t ₄₋₂₊	2	4		2		5,6,11,12	8	1, 16	
	t ₄₊₂₋	2	4		2		5,6,11,12	8	1, 16	
Rise Time (20 to 80%)	t ₂₊	2	4		2		5,6,11,12	8	1, 16	
Fall Time (20 to 80%)	t ₂₋	2	4		2		5,6,11,12	8	1, 16	

Each MECL 10,000 series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50-ohm resistor to -2.0 volts. Test procedures are shown for only one gate. The other gates are tested in the same manner.




MC10115

PACKAGE DIMENSIONS

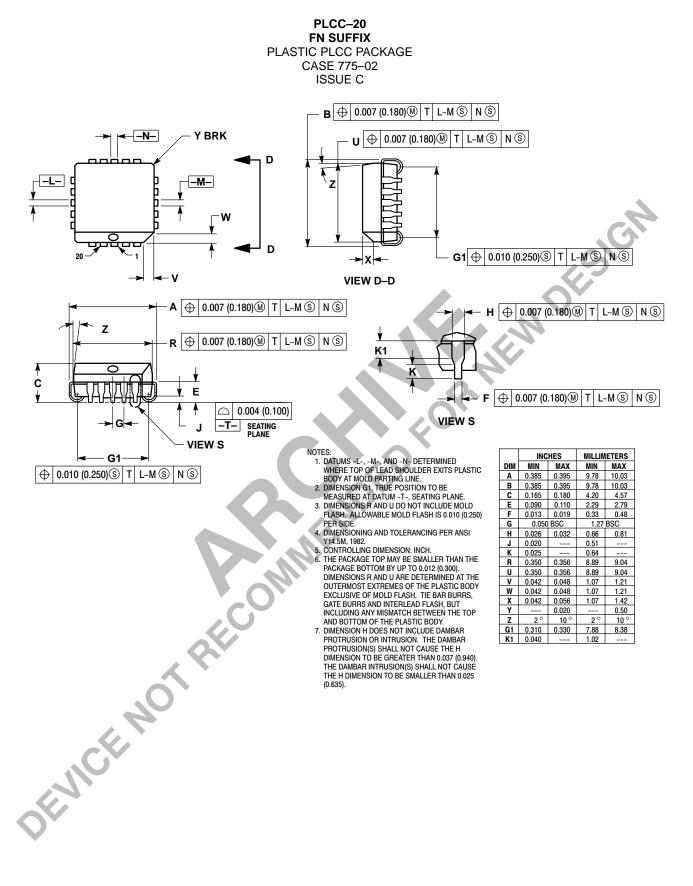

MC10115

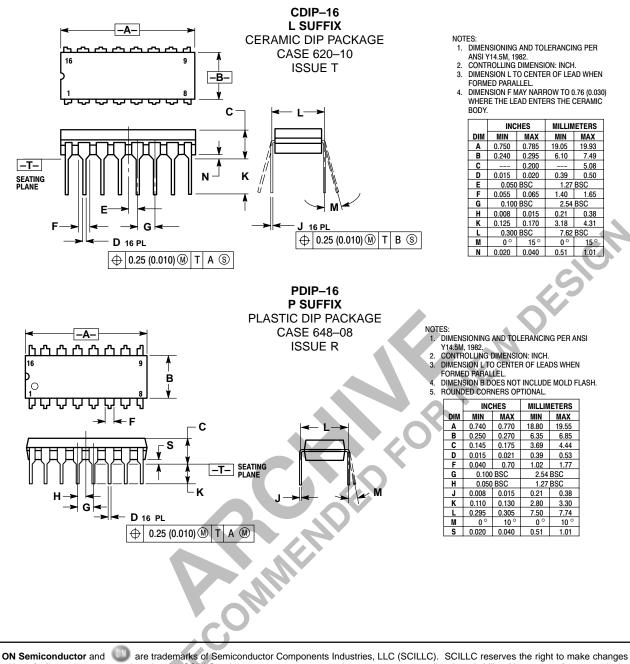

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

PUBLICATION ORDERING INFORMATION

Literature Fulfillment:

Literature Distribution Center for ON Semiconductor

P.O. Box 5163, Denver, Colorado 80217 USA

Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada Fax: 303–675–2176 or 800–344–3867 Toll Free USA/Canada Email: ONlit@hibbertco.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

JAPAN: ON Semiconductor, Japan Customer Focus Center 4–32–1 Nishi–Gotanda, Shinagawa–ku, Tokyo, Japan 141–0031 Phone: 81–3–5740–2700 Email: r14525@onsemi.com

ON Semiconductor Website: http://onsemi.com

For additional information, please contact your local Sales Representative.