**SDLS006** 

D2634, JANUARY 1981 REVISED MARCH 1988


- 8-Bit Serial-In, Parallel-Out Shift Registers with Storage
- Choice of 3-State ('LS595) or Open-Collector ('LS596) Parallel Outputs
- Shift Register Has Direct Clear
- Accurate Shift Frequency: DC to 20 MHz

#### description


These devices each contain an 8-bit serial-in, parallel-out shift register that feeds an 8-bit D-type storage register. The storage register has parallel 3-state ('LS595) or open-collector ('LS596) outputs. Separate clocks are provided for both the shift register and the storage register. The shift register has a direct-overriding clear, serial input, and serial output pins for cascading.

Both the shift register and storage register clocks are positive-edge triggered. If the user wishes to connect both clocks together, the shift register state will always be one clock pulse ahead of the storage register.

#### SN54LS595, SN54LS596...J OR W PACKAGE SN74LS595, SN74LS596...N PACKAGE (TOP VIEW)




# SN54LS595, SN54LS596 . . . FK PACKAGE (TOP VIEW)




NC - No internal connection


#### schematics of inputs and outputs

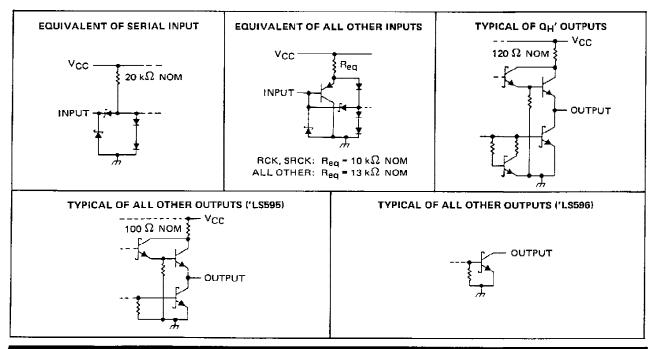

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



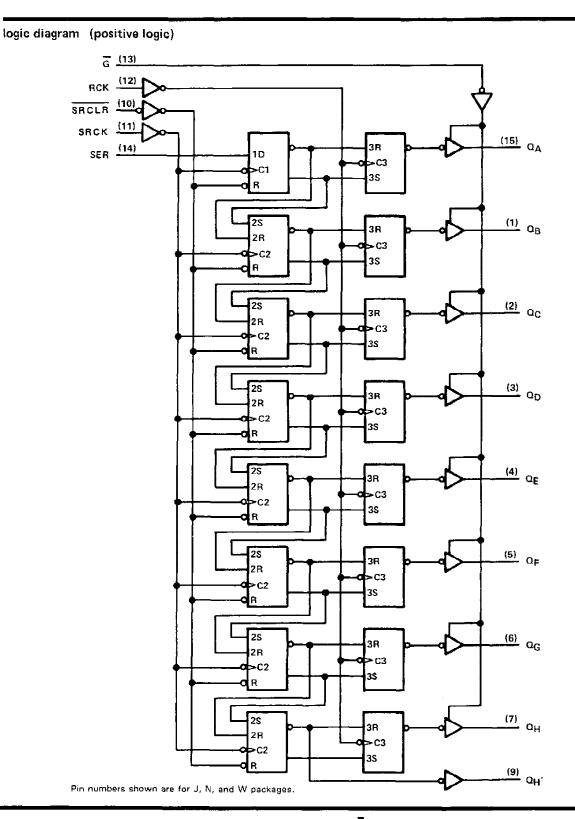

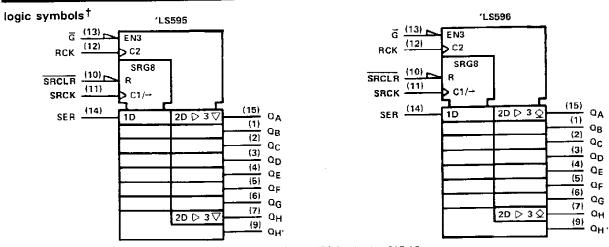

 $<sup>^{\</sup>dagger}$ These symbols are in accordance with ANSI/IEEE Std. 91-1984 and IEC Publication 617-12. Pin numbers shown are for J, N, and W packages.

# absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, Vcc (see Note 1)		
Input voltage		
Offictate output voltage		5.5 V
Operation free-air temperature range:	: SN54LS595.SN54LS596	55 C to 125 C
	SN741 S595, SN74LS596	0°C to /0°C
Storage temperature range		– 65°C to 150°C

NOTE 1: Voltage values are with respect to the network ground terminal.

#### recommended operating conditions

				SN54LS	3'		SN74LS	s'	UNIT	
			MIN	NOM	MAX	MIN	NOM	MAX	UNI	
V <sub>CC</sub>	Supply voltage		4.5	5	5.5	4.75	5	5.25		
ViH	High-level input voltage		2			2			V	
VIL	Low-level input voltage			0.7			0.8	V		
VOH	High-level output voltage	QA thru QH, 'LS596 only			5.5			5.5	٧	
		QH,			-1			- 1	mA	
10H	High-level output current	Q <sub>A</sub> thru Q <sub>H</sub> , 'L\$595 only			- 1			- 2.6		
<sup>1</sup> OL	Low-level output current	OH'			8			16	mA	
		Q		_	12			24		
fSRCK	Shift clock frequency	1	0		20	0		20	МН	
tw(SRCK)	Duration of shift clock pulse		25			25			ns	
tw(RCK)	Duration of register clock pul	SE	20			20			ns	
tw(SRCLR)	Duration of shift clear pulse,	low level	20			20			ns	
77,0110 = 111		SRCLR inactive before SRCK 1	20			20			_	
		SER before SRCK t	20			20			ns	
t <sub>Sti</sub>	Setup time	SRCK † before RCK † (see Note 2)	40			40				
		SRCLR low before RCK t	40			40				
th	Hold time	SER after SRCK †	0			0			ns	
TA	Operating free-air temperatur	e	- 55		125	0		70	°C	

NOTE 2: This setup time ensures the register will see stable data from the shift-register outputs. The clocks may be connected together, in which case the storage register state will be one clock pulse behind the shift register.



### SN54LS595, SN54LS596, SN74LS595, SN74LS596 8-BIT SHIFT REGISTERS WITH OUTPUT LATCHES

#### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST COND	NEIGNIC †		SN54LS	;;		SN74LS	ş'	UNIT
FARA	TAICIEN	I EST CONL	THOMS '	MIN	TYP#	MAX	MIN	TYP\$	MAX	OIGIT
Vik		V <sub>CC</sub> = MIN, I <sub>1</sub> = - 18 mA				- 1.5			<b>– 1.5</b>	V
	'LS595 Q	V <sub>CC</sub> = MIN, V <sub>IH</sub> = 2 V,	lOH = - 1 mA	2.4	3.2					
∨он		V)[ = MAX	I <sub>OH</sub> 2.6 mA	-			2.4	3.1		٧
	QH'		1 <sub>OH</sub> = -1 mA	2.4	3.2		2.4	3.2		
IОН	'L\$596 Q	$V_{CC} = MIN, V_{IH} = 2 V, V_{I}$	L = MAX, V <sub>OH</sub> = 5.5 V			0.1			0.1	mΑ
	α		I <sub>OL</sub> = 12 mA		0.25	0.4		0.25	0.4	
VOL		V <sub>CC</sub> = MIN, V <sub>IH</sub> = 2 V,	I <sub>OL</sub> = 24 mA					0.35	0.5	v
-UL	QH'	VIL = MAX	10L = 8 mA		0.25	0.4		0,25	0.4	•
	L GH		I <sub>QL</sub> ≈ 16 mA					0.35	0,5	
lozh	'LS595 Q	VCC = MAX, VIH = 2 V, VI	L = MAX, V <sub>OH</sub> = 2.7 V			20			20	μA
IOZL	'LS595 Q	VCC = MAX, VIH = 2 V, VI	L = MAX, VOH = 0.4 V			- 20			- 20	μА
l <sub>1</sub>		VCC = MAX, VI = 7 V				0.1			0.1	mA
ЧН		V <sub>CC</sub> - MAX, V <sub>1</sub> = 2.7 V				20			20	μА
1	SER	Vcc = MAX, V1 = 0.4 V				- 0.4			- 0.4	mΑ
1 L	All others	VCC MAX, V) "GA V				- 0.2			- 0.2	,117
les X	'LS595 Q	V <sub>CC</sub> = MAX, V <sub>C</sub> = 0 V		- 30		130	- 30		<b>- 130</b>	mA
los §	Q <sub>H</sub> ′	VCC - WAX, VO - 0 V		- 20		- 100	- 20		- 100	mA
lance	'LS595	-			33	50		33	50	
ICCH	'LS596	V <sub>CC</sub> = MAX,			30	45		30	45	mA
loo	'LS595	All possible inputs grounded,		_	42	65		42	65	
CCL	'LS596	All outputs open		36	55		36	55	mA	
¹ccz	'L <b>S</b> 595				44	65		44	65	mΑ

<sup>†</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions,

<sup>‡</sup> All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .
§ Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

# SN54LS595, SN54LS596, SN74LS595, SN74LS596 8-BIT SHIFT REGISTERS WITH OUTPUT LATCHES

# switching characteristics, VCC = 5 V, TA = $25^{\circ}$ C (see note 3)

DADAMETER	FROM	то	TEST ODA		'LS595	;		'LS596		UNIT	
PARAMETER	(INPUT)	(OUTPUT)	TEST CON	DITIONS	MIN	TYP	MAX	MIN	TYP	MAX	UNII
tPLH	SRCK1		5 46	0 = 20 = 5		12	18		14	21	ns
<sup>t</sup> PHL	SHUKT	ΦH'	R <sub>L</sub> = 1kΩ,	C <sub>L</sub> = 30 pF		17	25		20	30	ns
<sup>t</sup> PLH	RCK 1	Q <sub>A</sub> thru Q <sub>H</sub>			1	12	18		28	42	ns
<sup>t</sup> PHL	, nck '	ад ши ан	R <sub>1</sub> = 667 Ω,	CL = 45 pF		24	35		24	35	ns
tPZH	Ğ↓	QA thru QH	111 - 007 12,	CL - 40 pi		20	30				ns
tPZL	G1					25	38				ns
<sup>t</sup> PHZ	<u>G</u> ↑	O a show O	$R_1 = 667 \Omega$ .	CL = 5 pF		20	30				ns
tPLZ	1 3 '	Q <sub>A</sub> thru Q <sub>H</sub>	UL - 601 71,			25	38				ns
tPLH .	Ğ١	Qд thru Qн	$R_1 = 667 \Omega_s$	C. = 45 oF			·		40	60	ns
tPHL	Ğ∔	Q <sub>A</sub> thru Q <sub>H</sub>	11 - 007 12,	C <sub>L</sub> = 45 pF					25	38	ns
<sup>t</sup> PHL	SRCLR +	QH'	$R_{L} = 1 k\Omega$ ,	CL = 30 pF		24	35		24	35	ns

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.





6-Feb-2020

#### **PACKAGING INFORMATION**

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
5962-8671701EA	ACTIVE	CDIP	J	16	1	TBD	Call TI	N / A for Pkg Type	-55 to 125	5962-8671701EA SNJ54LS595J	Samples
5962-8671701FA	ACTIVE	CFP	W	16	1	TBD	Call TI	N / A for Pkg Type	-55 to 125	5962-8671701FA SNJ54LS595W	Samples
5962-8671701FA	ACTIVE	CFP	W	16	1	TBD	Call TI	N / A for Pkg Type	-55 to 125	5962-8671701FA SNJ54LS595W	Samples
SN54LS595J	ACTIVE	CDIP	J	16	1	TBD	Call TI	N / A for Pkg Type	-55 to 125	SN54LS595J	Samples
SN54LS595J	ACTIVE	CDIP	J	16	1	TBD	Call TI	N / A for Pkg Type	-55 to 125	SN54LS595J	Samples
SN74LS595D	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	0 to 70	LS595	Samples
SN74LS595D	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	0 to 70	LS595	Samples
SN74LS595DG4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	0 to 70	LS595	Samples
SN74LS595DG4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	0 to 70	LS595	Samples
SN74LS595DR	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	0 to 70	LS595	Samples
SN74LS595DR	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	0 to 70	LS595	Samples
SN74LS595N	ACTIVE	PDIP	N	16	25	Green (RoHS & no Sb/Br)	NIPDAU	N / A for Pkg Type	0 to 70	SN74LS595N	Samples
SN74LS595N	ACTIVE	PDIP	N	16	25	Green (RoHS & no Sb/Br)	NIPDAU	N / A for Pkg Type	0 to 70	SN74LS595N	Samples
SN74LS596N	ACTIVE	PDIP	N	16	25	Green (RoHS & no Sb/Br)	NIPDAU	N / A for Pkg Type	0 to 70	SN74LS596N	Samples
SN74LS596N	ACTIVE	PDIP	N	16	25	Green (RoHS & no Sb/Br)	NIPDAU	N / A for Pkg Type	0 to 70	SN74LS596N	Samples
SNJ54LS595J	ACTIVE	CDIP	J	16	1	TBD	Call TI	N / A for Pkg Type	-55 to 125	5962-8671701EA SNJ54LS595J	Samples
SNJ54LS595J	ACTIVE	CDIP	J	16	1	TBD	Call TI	N / A for Pkg Type	-55 to 125	5962-8671701EA SNJ54LS595J	Samples



#### PACKAGE OPTION ADDENDUM

6-Feb-2020

Orderable Device	Status	Package Type	_	Pins	_	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
	(1)		Drawing		Qty	(2)	(6)	(3)		(4/5)	
SNJ54LS595W	ACTIVE	CFP	W	16	1	TBD	Call TI	N / A for Pkg Type	-55 to 125	5962-8671701FA SNJ54LS595W	Samples
SNJ54LS595W	ACTIVE	CFP	W	16	1	TBD	Call TI	N / A for Pkg Type	-55 to 125	5962-8671701FA SNJ54LS595W	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead/Ball Finish Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN54LS595, SN74LS595:



### **PACKAGE OPTION ADDENDUM**

6-Feb-2020

Military: SN54LS595

NOTE: Qualified Version Definitions:

• Catalog - TI's standard catalog product


• Military - QML certified for Military and Defense Applications

# PACKAGE MATERIALS INFORMATION

www.ti.com 29-Jul-2009

#### TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing			Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LS595DR	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1

**PACKAGE MATERIALS INFORMATION** 

www.ti.com 29-Jul-2009



#### \*All dimensions are nominal

Ī	Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
	SN74LS595DR	SOIC	D	16	2500	333.2	345.9	28.6

# D (R-PDS0-G16)

#### PLASTIC SMALL OUTLINE



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AC.



# D (R-PDSO-G16)

# PLASTIC SMALL OUTLINE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



# W (R-GDFP-F16)

# CERAMIC DUAL FLATPACK



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only.
- E. Falls within MIL STD 1835 GDFP2-F16



## 14 LEADS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

# N (R-PDIP-T\*\*)

# PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

Tl's products are provided subject to Tl's Terms of Sale (<a href="www.ti.com/legal/termsofsale.html">www.ti.com/legal/termsofsale.html</a>) or other applicable terms available either on ti.com or provided in conjunction with such Tl products. Tl's provision of these resources does not expand or otherwise alter Tl's applicable warranties or warranty disclaimers for Tl products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2020, Texas Instruments Incorporated