

General Description

The MAX4521/MAX4522/MAX4523 are guad, low-voltage, single-pole/single-throw (SPST) analog switches. On-resistance (100 Ω max) is matched between switches to 4Ω max, and is flat (12Ω max) over the specified signal range. Each switch can handle rail-to-rail analog signals. The off-leakage current is only 1nA at +25°C and 10nA at +85°C.

The MAX4521 has four normally closed (NC) switches, and the MAX4522 has four normally open (NO) switches. The MAX4523 has two NC switches and two NO switches.

These CMOS switches can operate with dual power supplies ranging from ±2V to ±6V or a single supply between +2V and +12V. They are fully specified for single +2.7V operation.

All digital inputs have +0.8V and +2.4V logic thresholds, ensuring TTL/CMOS-logic compatibility when using ±5V or a single +5V supply.

Applications

Battery-Operated Equipment

Data Acquisition

Test Equipment

Avionics

Audio Signal Routing

Networking

Features


- ♦ +2V to +12V Single Supply ±2V to ±6V Dual Supplies
- ♦ 100Ω Signal Paths with ±5V Supplies
- ♦ Low Power Consumption, <1µW
- **♦ 4 Separately Controlled SPST Switches**
- ♦ Rail-to-Rail Signal Handling
- ♦ Pin Compatible with Industry-Standard DG211/DG212/DG213
- ♦ >2kV ESD Protection per Method 3015.7
- ♦ TTL/CMOS-Compatible Inputs with ±5V or Single +5V Supply

Ordering Information

PART	TEMP RANGE	PIN- PACKAGE	PKG CODE
MAX4521CPE	0°C to +70°C	16 Plastic DIP	P16-1
MAX4521CSE	0°C to +70°C	16 Narrow SO	S16-2
MAX4521CEE	0°C to +70°C	16 QSOP	E16-4
MAX4521CUE	0°C to +70°C	16 TSSOP	U16-2
MAX4521CGE	0°C to +70°C	16 QFN-EP**	G1644-1
MAX4521C/D	0°C to +70°C	Dice*	_

Ordering Information continued at end of data sheet.

Pin Configurations/Functional Diagrams/Truth Tables

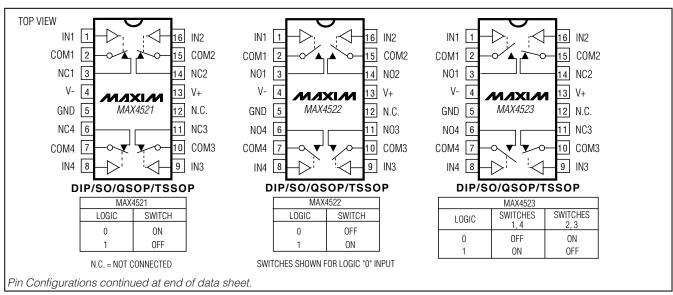

Maxim Integrated Products 1

^{*}Contact factory for dice specifications.

^{**}EP = Exposed pad.

ABSOLUTE MAXIMUM RATINGS

Voltages Referenced to GND	
V+	0.3V to +13.0V
V	13.0V to +0.3V
V+ to V	0.3V to +13.0V
All Other Pins (Note 1)	(V 0.3V) to $(V+ + 0.3V)$
Continuous Current into Any Terminal.	±10mA
Peak Current into Any Terminal	
(pulsed at 1ms, 10% duty cycle)	±20mA
ESD per Method 3015.7	>2000V

Continuous Power Dissipation (T _A = +70°C) (Note 2)
Plastic DIP (derate 10.53mW/°C above +70°C)842mW
Narrow SO (derate 8.70mW/°C above +70°C)696mW
QSOP (derate 9.52mW/°C above +70°C)762mW
CERDIP (derate 10.00mW/°C above +70°C)800mW
TSSOP (derate 6.7mW/°C above +70°C)457mW
QFN (derate 16.9mW/°C above +70°C)1349mW
Operating Temperature Ranges
MAX452_C_E0°C to +70°C
MAX452_E_E40°C to +85°C
MAX452_MJE55°C to +125°C
Storage Temperature Range65°C to +150°C
Lead Temperature (soldering, 10s)+300°C

Note 1: Signals on NC_, NO_, COM_, or IN_ exceeding V+ or V- are clamped by internal diodes. Limit forward-diode current to maximum current rating.

Note 2: All leads are soldered or welded to PC boards.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—Dual Supplies

 $(V+ = +4.5V \text{ to } +5.5V, V- = -4.5V \text{ to } -5.5V, T_A = T_{MIN} \text{ to } T_{MAX}, \text{ unless otherwise noted.}$ Typical values are at $T_A = +25^{\circ}C.)$

PARAMETER	SYMBOL	CONDITIONS	TA	MIN	TYP (Note 3)	MAX	UNITS
ANALOG SWITCH			•				•
Analog Signal Range	V _{COM} _, V _{NO} _, V _{NC} _	(Note 4)	C, E, M	V-		V+	V
COM_ to NO_, COM_ to NC_	Pou	V+ = 5V, V- = -5V,	+25°C		65	100	Ω
On-Resistance	Ron	$V_{COM} = \pm 3V$, $I_{COM} = 1mA$	C, E, M			125	1 52
COM_ to NO_, COM_ to NC_		V+ = 5V. V- = -5V.	+25°C		1	4	
On-Resistance Match Between Channels (Note 5)	ΔR _{ON}	V + = 5V, V - = -5V, $V_{COM} = \pm 3V, I_{COM} = 1mA$	C, E, M			6	Ω
COM_ to NO_, COM_ to NC_		., ., ., .,	+25°C		7	12	
On-Resistance Flatness (Note 6)	R _{FLAT} (ON)	V+ = 5V, V- = -5V, $V_{COM} = \pm 3V, I_{COM} = 1mA$	C, E, M			15	Ω
			+25°C	-1	0.01	1	
NO_, NC_ Off-Leakage Current (Note 7)	NO_(OFF),	V+ = 5.5V, V- = -5.5V, $V_{COM} = \mp 4.5V, V_{N} = \pm 4.5V$	C, E	-10		10	nA
(Note 1)	INC_(OFF)	VCOM_ = +4.5V, VN_ = ±4.5V	М	-100		100	1
0014 0"1 1 0		V 5 5V V 5 5V	+25°C	-1	0.01	1	
COM_ Off-Leakage Current (Note 7)	ICOM_(OFF)	V + = 5.5V, V - = -5.5V, $V_{COM} = \pm 4.5V, V_{N} = \mp 4.5V$	C, E	-10		10	nA
(14010 1)		VCOIVI ±4.5V, VIN+ 4.5V		-100		100]
COM On London Current		V. 55V.V. 55V	+25°C	-2	0.01	2	
COM_ On-Leakage Current (Note 7)	ICOM_(ON)	V + = 5.5V, V - = -5.5V, $V_{COM} = \pm 4.5V$	C, E	-20		20	nA
(1.0.0.7)		- COIVI	М	-200		200	

ELECTRICAL CHARACTERISTICS—Dual Supplies (continued)

 $(V+ = +4.5V \text{ to } +5.5V, V- = -4.5V \text{ to } -5.5V, T_A = T_{MIN} \text{ to } T_{MAX}, \text{ unless otherwise noted.}$ Typical values are at $T_A = +25^{\circ}C.)$

PARAMETER	SYMBOL	CONDITIONS	TA	MIN	TYP (Note 3)	MAX	UNITS
LOGIC INPUT		1					
IN_ Input Logic Threshold High	V _{IN_H}		C, E, M		1.6	2.4	V
IN_ Input Logic Threshold Low	V _{IN_L}		C, E, M	0.8	1.6		V
IN_ Input Current Logic High or Low	I _{INH_} , I _{INL_}	V _{IN} _ = 0.8V or 2.4V	C, E, M	-1	0.03	1	μA
SWITCH DYNAMIC CHARACTE	RISTICS	-					
Turn On Times	+	$V_{COM} = \pm 3V, V_{+} = 4.5V,$	+25°C		45	80	
Turn-On Time	ton	V = -4.5V, Figure 1	C, E, M			100	ns
Turn-Off Time	+	$V_{COM} = \pm 3V, V_{+} = 4.5V,$	+25°C		15	30	no
rum-on time	toff	V- = -4.5V, Figure 1	C, E, M			40	ns
Break-Before-Make Time Delay (MAX4523 only)	[†] BBM	V _{COM} _ = ±3V, V+ = 5.5V, V- = -5.5V, Figure 2	+25°C	5	20		ns
Charge Injection (Note 4)	Q	$C_L = 1nF$, $V_{NO} = 0$, $R_S = 0\Omega$, Figure 3	+25°C		1	5	рС
NO_, NC_ Off-Capacitance	C _{N_(OFF)}	V _{NO} _ = GND, f = 1MHz, Figure 6	+25°C		2		pF
COM_ Off-Capacitance	CCOM_(OFF)	V _{COM} _ = GND, f = 1MHz, Figure 6	+25°C		2		рF
COM_ On-Capacitance	C _{COM} (ON)	V _{COM} = V _{NO} = GND, f = 1MHz, Figure 7	+25°C		5		pF
Off-Isolation (Note 8)	V _{ISO}	$R_L = 50\Omega$, $C_L = 15pF$, $V_{N} = 1V_{RMS}$, $f = 100kHz$, Figure 4	+25°C		< -90		dB
Channel-to-Channel Crosstalk (Note 9)	V _{CT}	$R_L = 50\Omega$, $C_L = 15pF$, $V_{N_} = 1V_{RMS}$, $f = 100kHz$, Figure 5	+25°C		< -90		dB
POWER SUPPLY		T					
Power-Supply Range	V+, V-		C, E, M	-6		6	V
V+ Supply Current	l+	$V+ = 5.5V$, all $V_{IN} = 0$ or $V+$	+25°C	-1 -1	0.05	1	μΑ
V- Supply Current	I-	V- = -5.5V	C, E, M +25°C C, E, M	-1 -1 -1	0.05	1 1	μΑ
	l		, _, .v.	•		<u> </u>	

ELECTRICAL CHARACTERISTICS—Single +5V Supply

 $(V+ = +4.5V \text{ to } +5.5V, V- = 0V, T_A = T_{MIN} \text{ to } T_{MAX}, \text{ unless otherwise noted.}$ Typical values are at $T_A = +25^{\circ}C.)$

PARAMETER	SYMBOL	CONDITIONS	TA	MIN	TYP (Note 3)	MAX	UNITS
ANALOG SWITCH							
Analog Signal Range	V _{COM_} , V _{NO_} , V _{NC_}	(Note 4)	C, E, M	0		V+	V
COM_ to NO_, COM_ to NC_	RON	$V + = 4.5V, V_{COM} = 3.5V,$	+25°C		125	200	Ω
On-Resistance	TION	I _{COM} _ = 1mA	C, E, M			250	52
COM_ to NO_, COM_ to NC_ On-Resistance Match Between Channels (Note 5)	ΔR _{ON}	V+ = 5V, V _{COM} _ = 3.5V, I _{COM} _ = 1mA	+25°C C, E, M		2	10	Ω
			+25°C	-1	0.01	1	
NO_, NC_ Off-Leakage Current	INO_(OFF),	$V+ = 5.5V; V_{COM} = 1V, 4.5V;$ $V_{N} = 4.5V, 1V$	C, E	-10		10	nA
(Notes 7, 10)	INC_(OFF)	VN_ = 4.5V, 1V	М	-100		100	1
0011 0011 1 0			+25°C	-1	0.01	1	
COM_ Off-Leakage Current (Notes 7, 10)	I _{COM_(OFF)}	$V+ = 5.5V; V_{COM} = 1V, 4.5V;$ $V_{N} = 4.5V, 1V$	C, E	-10		10	nA
(Notes 1, 10)			М	-100		100	
COM On London Comment	ICOM_(ON)	V+ = 5.5V; V _{COM} _ = 4.5V, 1V	+25°C	-2	0.01	2	
COM_ On-Leakage Current (Notes 7, 10)			C, E,	-20		20	nA
(140:00 7, 10)			М	-200		200	
LOGIC INPUT							
IN_ Input Logic Threshold High	V _{IN} _H		C, E		1.6	2.4	V
IN_ Input Logic Threshold Low	V _{IN_L}		C, E	8.0	1.6		V
IN_ Input Current Logic High or Low	I _{INH_} , I _{INL_}	V _{IN} _ = 0.8V or 2.4V	C, E	-1	0.03	1	μΑ
SWITCH DYNAMIC CHARACTE	RISTICS		'				'
Turn-On Time	tou	$V_{COM} = 3V, V = 4.5V,$	+25°C		60	100	no
Turri-Ori Tilrie	ton	Figure 1	C, E, M			150	ns
Turn-Off Time	torr	$V_{COM_{-}} = 3V, V_{+} = 4.5V,$	+25°C		20	50	ne
Turri-Oir Time	toff	Figure 1	C, E, M			75	ns
Break-Before-Make Time Delay (MAX4523 only)	†BBM	V _{COM} _ = 3V, V+ = 5.5V, Figure 2	+25°C	10	30		ns
Charge Injection (Note 4)	Q	$C_L = 1nF$, $V_{NO} = 0$, $R_S = 0\Omega$, Figure 3	+25°C		1	5	рС
POWER SUPPLY	•		•				
V+ Supply Current	1.	V 5 5V 2ll VIII - 0 cr V	+25°C	-1	0.05	1	
v + Supply Current	I+	$V+ = 5.5V$, all $V_{IN} = 0$ or $V+$	C, E, M	-1		1	μA
V- Supply Current	I-	V- = 0	+25°C	-1	0.05	1	
v- Supply Currett	I-	V- = U	C, E, M	-1		1	- μΑ

ELECTRICAL CHARACTERISTICS—Single +3V Supply


 $(V+ = +2.7V \text{ to } +3.6V, V- = 0V, T_A = T_{MIN} \text{ to } T_{MAX}, \text{ unless otherwise noted.}$ Typical values are at $T_A = +25^{\circ}C.)$

PARAMETER	SYMBOL	CONDITIONS	TA	MIN	TYP (Note 3)	MAX	UNITS
ANALOG SWITCH							
Analog Signal Range	V _{COM_} , V _{NO_} , V _{NC_}	(Note 4)	C, E, M	0		V+	V
COM_ to NO_, COM_ to NC_ On-Resistance	RON	$V+ = 2.7V, V_{COM} = 1.0V, I_{COM} = 0.1mA$	+25°C C, E, M		260	500 600	Ω
LOGIC INPUT	ı						
IN_ Input Logic Threshold High	V _{IN_H}		C, E		1.6	2.4	V
IN_ Input Logic Threshold Low	V _{IN_L}		C, E	0.8	1.6		V
IN_ Input Current Logic High or Low	I _{INH_} , I _{INL_}	V _{IN} _ = 0.8V or 2.4V	C, E	-1	0.03	1	μΑ
SWITCH DYNAMIC CHARACTE	RISTICS (Note 4)						•
Turn-On Time	ton	$V_{COM} = 1.5V, V + = 2.7V,$	+25°C		120	250	ns
Turri eri filme	TON	Figure 1	C, E, M			300	110
Turn-Off Time	toff	$V_{COM} = 1.5V, V + = 2.7V,$	+25°C		40	80	ns
	5011	Figure 1	C, E, M			100	
Break-Before-Make Time Delay (MAX4523 only)	t _{BBM}	V _{COM} _ = 1.5V, V+ = 3.6V, Figure 2	+25°C	15	50		ns
Charge Injection	Q	$C_L = 1nF$, $V_{NO} = 0$, $R_S = 0\Omega$, Figure 3	+25°C		0.5	5	рС
POWER SUPPLY	ı	1					1
V+ Supply Current	+	$V+ = 3.6V$, all $V_{IN} = 0$ or $V+$	+25°C	-1	0.05	1	μA
v + Supply Suitent	IT.	V + - 0.0V, all V \(\bar{\q} \) - 0 01 V +	C, E, M	-1		1	μΛ
V- Supply Current	 -	V- = 0	+25°C	-1	0.05	1	μΑ
. Cappiy Carroin	I-	v = 0	C, E, M	-1		1	μ, .

- Note 3: The algebraic convention is used in this data sheet; the most negative value is shown in the minimum column.
- Note 4: Guaranteed by design.
- **Note 5:** $\Delta R_{ON} = \Delta R_{ON(MAX)} \Delta R_{ON(MIN)}$.
- **Note 6:** Resistance flatness is defined as the difference between the maximum and minimum on-resistance values, as measured over the specified analog signal range.
- Note 7: Leakage parameters are 100% tested at maximum rated temperature, and guaranteed by correlation at TA = +25°C.
- Note 8: Off-Isolation = 20log₁₀ [V_{COM_} / (V_{NC_} or V_{NO_})], V_{COM_} = output, V_{NC_} or V_{NO_} = input to off switch.
- Note 9: Between any two switches.
- Note 10: Leakage testing for single-supply operation is guaranteed by testing with dual supplies.


Typical Operating Characteristics


 $(V+ = +5V, V- = -5V, GND = 0, T_A = +25^{\circ}C, unless otherwise noted.)$

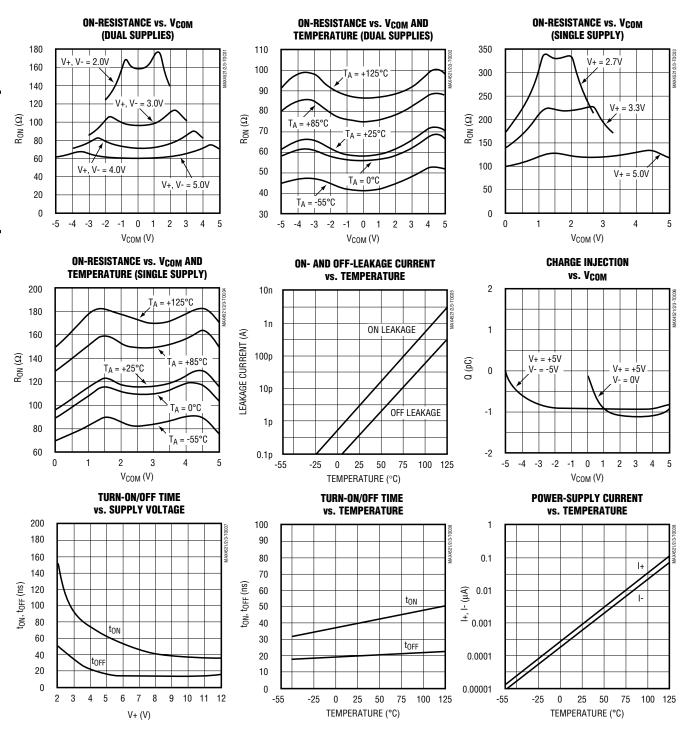

Typical Operating Characteristics (continued)

 $(V+ = +5V, V- = -5V, GND = 0, T_A = +25^{\circ}C, unless otherwise noted.)$





Pin Description

		PI	IN				
MAX	4521	MAX	4522	MAX	MAX4523		FUNCTION
TSSOP/SO	QFN	TSSOP/SO	QFN	TSSOP/SO	QFN		
1, 16, 9, 8	15, 14, 7, 6	1, 16, 9, 8	15, 14, 7, 6	1, 16, 9, 8	15, 14, 7, 6	IN1-1N4	Logic-Control Digital Input
2, 15, 10, 7	16, 13, 8, 5	2, 15, 10, 7	16, 13, 8, 5	2, 15, 10, 7	16, 13, 8, 5	COM1-COM4	Analog Switch Common* Terminals
3, 14, 11, 6	1, 12, 9, 4	_	_	_	_	NC1-NC4	Analog Switch Normally Closed Terminals
_	_	3, 14, 11, 6	1, 12, 9, 4	_	_	NO1-NO4	Analog Switch Normally Open Terminals
_	_			3, 6	1, 4	NO1, NO4	Analog Switch Normally Open Terminals
_				14, 11	12, 9	NC2, NC3	Analog Switch Normally Closed Terminals
4	2	4	2	4	2	V-	Negative Analog Supply-Voltage Input. Connect to GND for single supply operation.
5	3	5	3	5	3	GND	Ground. Connect to digital ground. (Analog signals have no ground reference; they are limited to V+ and V)
12	10	12	10	12	10	N.C.	No Connection. Not internally connected.
13	11	13	11	13	11	V+	Positive Analog and Digital Supply- Voltage Input. Internally connected to substrate.
_	EP	_	EP	_	EP	EP	Exposed Pad. Connect EP to V+.

^{*}NO_ (or NC_) and COM_ pins are identical and interchangeable. Either may be considered as an input or output; signals pass equally well in either direction.

Applications Information Power-Supply Considerations

Overview

The MAX4521/MAX4522/MAX4523 construction is typical of most CMOS analog switches. They have three supply pins: V+, V-, and GND. V+ and V- are used to drive the internal CMOS switches, and they set the limits of the analog voltage on any switch. Reverse ESD-protection diodes are internally connected between each analog-signal pin and both V+ and V-. If any analog signal exceeds V+ or V-, one of these diodes conducts. During normal operation these reverse-biased ESD diodes leak, forming the only current drawn from V+ or V-.

Virtually all the analog leakage current is through the ESD diodes. Although the ESD diodes on a given signal pin are identical and therefore fairly well balanced, they are reverse biased differently. Each is biased by either V+ or V- and the analog signal. This means their leakages vary as the signal varies. The difference in the two diode leakages from the signal path to the V+ and V- pins constitutes the analog-signal-path leakage current. All analog leakage current flows to the supply terminals, not to the other switch terminal. This explains how both sides of a given switch can show leakage currents of the same or opposite polarity.

There is no connection between the analog-signal paths and GND. The analog-signal paths consist of an N-channel and P-channel MOSFET with their sources and drains paralleled, and their gates driven out of phase to V+ and V- by the logic-level translators.

V+ and GND power the internal logic and logic-level translators, and set the input logic thresholds. The logic-level translators convert the logic levels to switched V+ and V- signals to drive the gates of the analog switches. This drive signal is the only connection between the logic supplies and the analog supplies. V+ and V- have ESD-protection diodes to GND. The logic-level inputs and output have ESD protection to V+ and to GND.

Increasing V- has no effect on the logic-level thresholds, but it does increase the drive to the P-channel switches, reducing their on-resistance. V- also sets the negative limit of the analog-signal voltage.

The logic-level thresholds are CMOS/TTL compatible when V+=+5V. The threshold increases slightly as V+ is raised, and when V+ reaches +12V, the level threshold is about 3.1V. This is above the TTL output high-level minimum of 2.8V, but still compatible with CMOS outputs.

Bipolar Supplies

The MAX4521/MAX4522/MAX4523 operate with bipolar supplies between ±2V and ±6V. The V+ and V- supplies need not be symmetrical, but their sum cannot exceed the absolute maximum rating of 13.0V. **Do not connect the MAX4521/MAX4522/MAX4523 V+ to +3V, and then connect the logic-level-input pins to TTL logic-level signals. TTL logic-level outputs in excess of the absolute maximum ratings can damage the part and/or external circuits.**

Caution: The absolute maximum V+ to V- differential voltage is 13.0V. Typical ±6V or 12V supplies with ±10% tolerances can be as high as 13.2V. This voltage can damage the MAX4521/MAX4522/MAX4523. Even ±5% tolerance supplies may have overshoot or noise spikes that exceed 13.0V.

Single Supply

The MAX4521/MAX4522/MAX4523 operate from a single supply between +2V and +12V when V- is connected to GND. All of the bipolar precautions must be observed.

High-Frequency Performance

In 50Ω systems, signal response is reasonably flat up to 50MHz (see *Typical Operating Characteristics*). Above 20MHz, the on-response has several minor peaks that are highly layout dependent. The problem with high-frequency operation is not turning the switch on, but turning it off. The off-state switch acts like a capacitor and passes higher frequencies with less attenuation. At 10MHz, off-isolation is about -52dB in 50Ω systems, becoming worse (approximately 20dB per decade) as frequency increases. Higher circuit impedances also make off-isolation worse. Adjacent channel attenuation is about 3dB above that of a bare IC socket, and is due entirely to capacitive coupling.

Test Circuits/Timing Diagrams

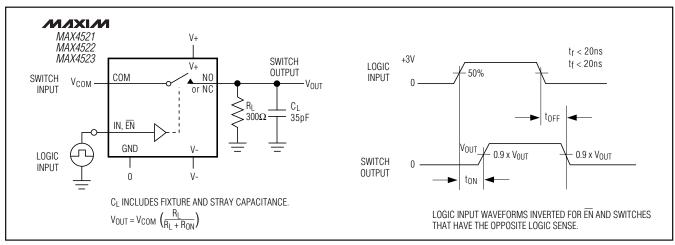


Figure 1. Switching Time

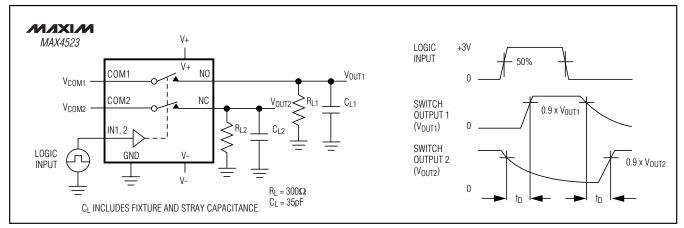


Figure 2. Break-Before-Make Interval (MAX4523 only)

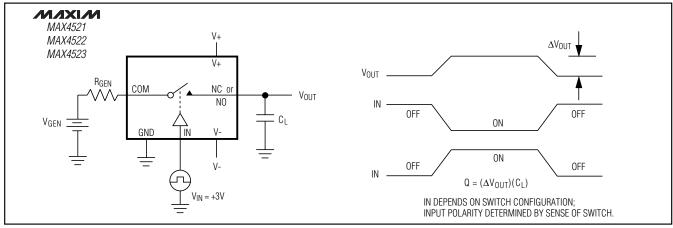


Figure 3. Charge Injection

Test Circuits/Timing Diagrams (continued)




Figure 4. Off-Isolation




Figure 6. Channel Off-Capacitance




Figure 5. Crosstalk





Figure 7. Channel On-Capacitance

_Ordering Information (continued)

	_	_	=
PART	TEMP RANGE	PIN- PACKAGE	PKG CODE
MAX4521EPE	-40°C to +85°C	16 Plastic DIP	P16-1
MAX4521ESE	-40°C to +85°C	16 Narrow SO	S16-2
MAX4521EEE	-40°C to +85°C	16 QSOP	E16-4
MAX4521EUE	-40°C to +85°C	16 TSSOP	U16-2
MAX4521EGE	-40°C to +85°C	16 QFN-EP**	G1644-1
MAX4521MJE	-55°C to +125°C	16 CERDIP***	J16-3
MAX4522CPE	0°C to +70°C	16 Plastic DIP	P16-1
MAX4522CSE	0°C to +70°C	16 Narrow SO	S16-2
MAX4522CEE	0°C to +70°C	16 QSOP	E16-4
MAX4522CUE	0°C to +70°C	16 TSSOP	U16-2
MAX4522CGE	0°C to +70°C	16 QFN-EP**	G1644-1
MAX4522C/D	0°C to +70°C	Dice*	_
MAX4522EPE	-40°C to +85°C	16 Plastic DIP	P16-1
MAX4522ESE	-40°C to +85°C	16 Narrow SO	S16-2
MAX4522EEE	-40°C to +85°C	16 QSOP	E16-4
MAX4522EUE	-40°C to +85°C	16 TSSOP	U16-2
MAX4522EGE	-40°C to +85°C	16 QFN-EP**	G1644-1
MAX4522MJE	-55°C to +125°C	16 CERDIP***	J16-3
MAX4523CPE	0°C to +70°C	16 Plastic DIP	P16-1
MAX4523CSE	0°C to +70°C	16 Narrow SO	S16-2
MAX4523CEE	0°C to +70°C	16 QSOP	E16-4
MAX4523CUE	0°C to +70°C	16 TSSOP	U16-2
MAX4523CGE	0°C to +70°C	16 QFN-EP**	G1644-1
MAX4523C/D	0°C to +70°C	Dice*	_
MAX4523EPE	-40°C to +85°C	16 Plastic DIP	P16-1
MAX4523ESE	-40°C to +85°C	16 Narrow SO	S16-2
MAX4523EEE	-40°C to +85°C	16 QSOP	E16-4
MAX4523EUE	-40°C to +85°C	16 TSSOP	U16-2
MAX4523EGE	-40°C to +85°C	16 QFN-EP**	G1644-1
MAX4523MJE	-55°C to +125°C	16 CERDIP***	J16-3

^{*}Contact factory for dice specifications.

_Chip Topography

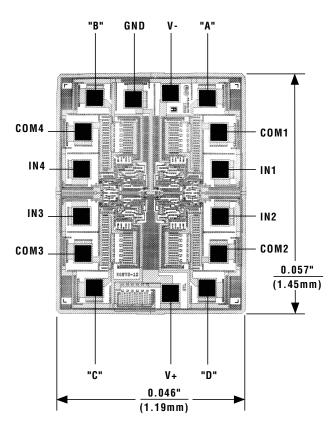


MAX4521		МАХ	(4522	MAX4523		
PIN	NAME	PIN	NAME	PIN	NAME	
А	NC1	А	N01	А	N01	
В	NC4	В	N04	В	N04	
С	NC3	С	N03	С	NC3	
D	NC2	D	N02	D	NC2	

SUBSTRATE CONNECTED TO V+

^{**}EP = Exposed pad.

^{***}Contact factory for availability.


Pin Configurations

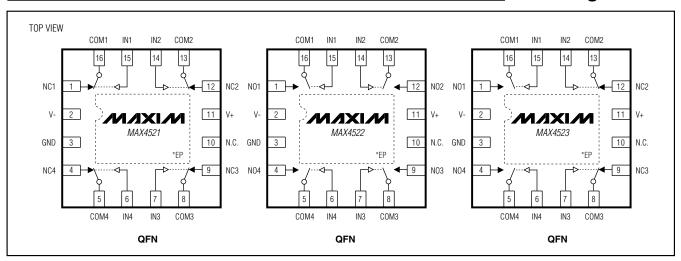


*EP = Exposed Pad, connect EP to V+

Package Information


(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

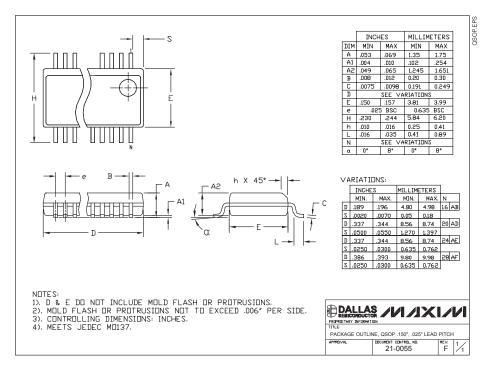


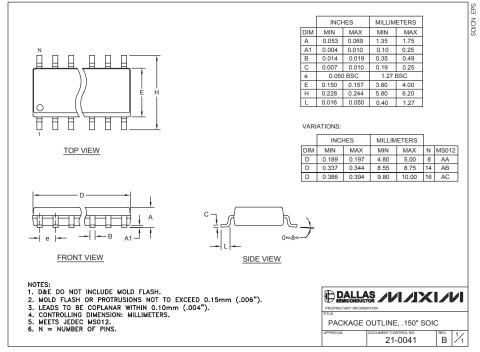

Package Information (continued)


(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

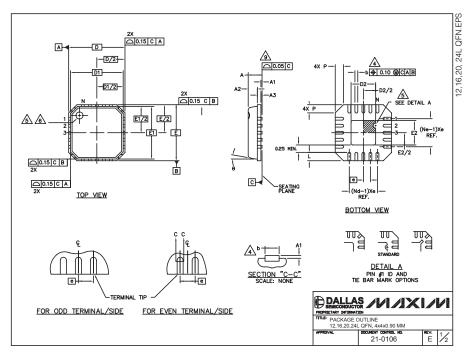

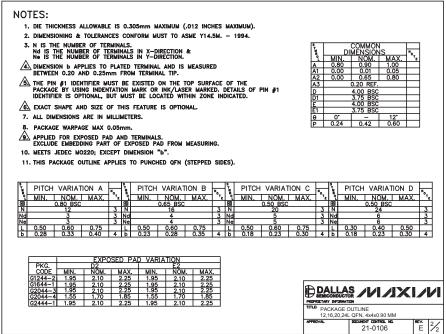

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

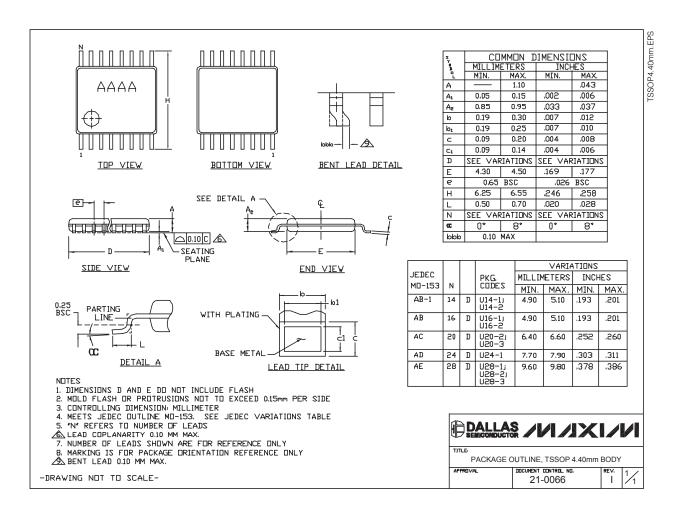

_Revision History

Pages changed at Rev 6: 1, 7, 11, 12, 15

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

15 ______Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600

MAX4522

Part Number Table

Notes:

- 1. See the MAX4522 QuickView Data Sheet for further information on this product family or download the MAX4522 full data sheet (PDF, 892kB).
- 2. Other options and links for purchasing parts are listed at: http://www.maxim-ic.com/sales.
- 3. Didn't Find What You Need? Ask our applications engineers. Expert assistance in finding parts, usually within one business day.
- 4. Part number suffixes: T or T&R = tape and reel; + = RoHS/lead-free; # = RoHS/lead-exempt. More: See full data sheet or Part Naming Conventions.
- 5. * Some packages have variations, listed on the drawing. "PkgCode/Variation" tells which variation the product uses.

Part Number	Free Sample	Buy Direct	Package: TYPE PINS SIZE DRAWING CODE/VAR *	Temp	RoHS/Lead-Free? Materials Analysis
MAX4522MJE				-55C to +125C	RoHS/Lead-Free: No
MAX4522C/D					RoHS/Lead-Free: No
MAX4522CPE+			PDIP;16 pin;.300" Dwg: 21-0043D (PDF) Use pkgcode/variation: P16+1*	0C to +70C	RoHS/Lead-Free: Yes Materials Analysis
MAX4522EPE+				-40C to +85C	RoHS/Lead-Free: Yes
MAX4522CPE			PDIP;16 pin;.300" Dwg: 21-0043D (PDF) Use pkgcode/variation: P16-1*	0C to +70C	RoHS/Lead-Free: No Materials Analysis
MAX4522EPE			PDIP;16 pin;.300" Dwg: 21-0043D (PDF) Use pkgcode/variation: P16-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
MAX4522EGE			QFN;16 pin;4x4x0.9mm Dwg: 21-0106E (PDF) Use pkgcode/variation: G1644-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis

MAX4522EGE-T	QFN;16 pin;4x4x0.9mm Dwg: 21-0106E (PDF) Use pkgcode/variation: G1644-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
MAX4522CEE+	QSOP;16 pin;.150" Dwg: 21-0055F (PDF) Use pkgcode/variation: E16+4*	0C to +70C	RoHS/Lead-Free: Yes Materials Analysis
MAX4522CEE+T	QSOP;16 pin;.150" Dwg: 21-0055F (PDF) Use pkgcode/variation: E16+4*	0C to +70C	RoHS/Lead-Free: Yes Materials Analysis
MAX4522CEE	QSOP;16 pin;.150" Dwg: 21-0055F (PDF) Use pkgcode/variation: E16-4*	0C to +70C	RoHS/Lead-Free: No Materials Analysis
MAX4522CEE-T	QSOP;16 pin;.150" Dwg: 21-0055F (PDF) Use pkgcode/variation: E16-4*	0C to +70C	RoHS/Lead-Free: No Materials Analysis
MAX4522EEE	QSOP;16 pin;.150" Dwg: 21-0055F (PDF) Use pkgcode/variation: E16-4*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
MAX4522EEE-T	QSOP;16 pin;.150" Dwg: 21-0055F (PDF) Use pkgcode/variation: E16-4*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
MAX4522EEE+T		-40C to +85C	RoHS/Lead-Free: Yes
MAX4522EEE+	QSOP;16 pin;.150" Dwg: 21-0055F (PDF) Use pkgcode/variation: E16+4*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
MAX4522CSE+	SOIC;16 pin;.150" Dwg: 21-0041B (PDF) Use pkgcode/variation: S16+2*	0C to +70C	RoHS/Lead-Free: Yes Materials Analysis
MAX4522CSE+T		0C to +70C	RoHS/Lead-Free: Yes
MAX4522CSE	SOIC;16 pin;.150" Dwg: 21-0041B (PDF) Use pkgcode/variation: S16-2*	0C to +70C	RoHS/Lead-Free: No Materials Analysis
MAX4522CSE-T	SOIC;16 pin;.150" Dwg: 21-0041B (PDF) Use pkgcode/variation: S16-2*	0C to +70C	RoHS/Lead-Free: No Materials Analysis
MAX4522ESE+T	SOIC;16 pin;.150" Dwg: 21-0041B (PDF) Use pkgcode/variation: S16+2*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
MAX4522ESE	SOIC;16 pin;.150" Dwg: 21-0041B (PDF) Use pkgcode/variation: S16-2*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
MAX4522ESE-T	SOIC;16 pin;.150" Dwg: 21-0041B (PDF) Use pkgcode/variation: S16-2*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis

MAX4522ESE+	SOIC;16 pin;.150" Dwg: 21-0041B (PDF) Use pkgcode/variation: S16+2*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
MAX4522CUE+	TSSOP;16 pin;4.4mm Dwg: 21-0066I (PDF) Use pkgcode/variation: U16+2*	0C to +70C	RoHS/Lead-Free: Yes Materials Analysis
MAX4522CUE+T		0C to +70C	RoHS/Lead-Free: Yes
MAX4522EUE+T		-40C to +85C	RoHS/Lead-Free: Yes
MAX4522EUE+	TSSOP;16 pin;4.4mm Dwg: 21-0066I (PDF) Use pkgcode/variation: U16+2*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
MAX4522CUE	TSSOP;16 pin;4.4mm Dwg: 21-0066I (PDF) Use pkgcode/variation: U16-2*	0C to +70C	RoHS/Lead-Free: No Materials Analysis
MAX4522CUE-T	TSSOP;16 pin;4.4mm Dwg: 21-0066I (PDF) Use pkgcode/variation: U16-2*	0C to +70C	RoHS/Lead-Free: No Materials Analysis
MAX4522EUE-T		-40C to +85C	RoHS/Lead-Free: No
MAX4522EUE	TSSOP;16 pin;4.4mm Dwg: 21-0066I (PDF) Use pkgcode/variation: U16-2*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis

Didn't Find What You Need?

CONTACT US: SEND US AN EMAIL

Copyright 2007 by Maxim Integrated Products, Dallas Semiconductor • Legal Notices • Privacy Policy