#### CDC208 DUAL 1-LINE TO 4-LINE CLOCK DRIVER WITH 3-STATE OUTPUTS SCAS109F – APRIL 1990 – REVISED OCTOBER 1998

		30A31031 - AI KIE 1330 - KEVIC	
•	Low-Skew Propagation Delay Specifications for Clock-Driver	DW PACKAGE (TOP VIEW)	
•	Applications TTL-Compatible Inputs and CMOS-Compatible Outputs	1Y2 1 20 1Y1 1Y3 2 19 1A	
•	Flow-Through Architecture Optimizes PCB Layout	1Y4 3 18 1 <u>0E1</u> GND 4 17 10E2 GND 5 16 V <sub>CC</sub>	
•	Center-Pin V <sub>CC</sub> and GND Pin Configurations Minimize High-Speed Switching Noise	GND 6 15 V <sub>CC</sub> GND 7 14 2A 2Y1 8 13 2OE1	
•	<i>EPIC</i> ™ (Enhanced-Performance Implanted CMOS) 1-μm Process	2Y2 9 12 2OE2 2Y3 10 11 2Y4	
•	500-mA Typical Latch-Up Immunity at 125°C		

 Package Options Include Plastic Small-Outline (DW)

#### description

The CDC208 contains dual clock-driver circuits that fanout one input signal to four outputs with minimum skew for clock distribution (see Figure 2). The device also offers two output-enable ( $\overline{OE1}$  and  $\overline{OE2}$ ) inputs for each circuit that can force the outputs to be disabled to a high-impedance state or to a high- or low-logic level independent of the signal on the respective A input.

Skew parameters are specified for a reduced temperature and voltage range common to many applications.

The CDC208 is characterized for operation from -40°C to 85°C.

_		FUNC		ABLES		
	INPUTS			OUT	PUTS	
10E1	10E2	1A	1Y1	1Y2	1Y3	1Y4
L	L	L	L	L	L	L
L	L	Н	н	Н	Н	н
L	н	Х	L	L	L	L
Н	L	Х	н	н	Н	н
н	н	Х	Z	Z	Z	Z

	INPUTS		OUTPUTS						
2 <u>0E1</u> 2 <u>0E2</u>		2A	2Y1	2Y2	2Y3	2Y4			
L	L	L	L	L	L	L			
L	L	Н	Н	Н	Н	Н			
L	Н	Х	L	L	L	L			
н	L	Х	Н	Н	Н	Н			
н	Н	Х	Z	Z	Z	Z			

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

EPIC is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.




Copyright © 1998, Texas Instruments Incorporated

### **CDC208 DUAL 1-LINE TO 4-LINE CLOCK DRIVER** WITH 3-STATE OUTPUTS


SCAS109F - APRIL 1990 - REVISED OCTOBER 1998

#### logic symbol<sup>†</sup>



<sup>†</sup> This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

#### logic diagram (positive logic)

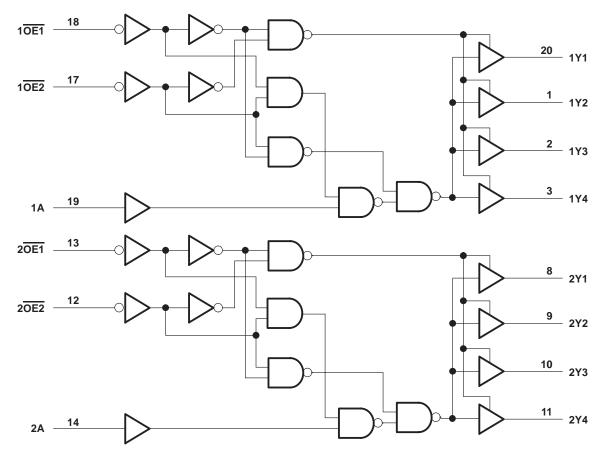



#### **CDC208 DUAL 1-LINE TO 4-LINE CLOCK DRIVER** WITH 3-STATE OUTPUTS SCAS109F - APRIL 1990 - REVISED OCTOBER 1998

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

2. The maximum package power dissipation is calculated using a junction temperature of 150°C and a board trace length of 750 mils. For more information, refer to the Package Thermal Considerations application note in the 1994 ABT Advanced BiCMOS Technology Data Book, literature number SCBD002B.

#### recommended operating conditions

		MIN	NOM	MAX	UNIT
VCC	Supply voltage	4.5	5	5.5	V
$V_{IH}$	High-level input voltage	2			V
$V_{IL}$	Low-level input voltage			0.8	V
VI	Input voltage	0		VCC	V
ЮН	High-level output current			-24	mA
IOL	Low-level output current			24	mA
$\Delta t/\Delta v$	Input transition rise or fall rate	0		10	ns/V
fclock	Input clock frequency			60	MHz
TA	Operating free-air temperature	-40		85	°C



# **CDC208 DUAL 1-LINE TO 4-LINE CLOCK DRIVER** WITH 3-STATE OUTPUTS SCAS109F – APRIL 1990 – REVISED OCTOBER 1998

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

			Т	<b>₄ = 25°C</b>	;			
PARAMETER	TEST CONDITIONS	VCC	MIN	TYP	MAX	MIN	MAX	UNIT
	10	4.5 V	4.4			4.4		
	I <sub>OH</sub> = -50 μA	5.5 V	5.4			5.4		
VOH	1 24 mA	4.5 V	3.94			3.8		V
	I <sub>OH</sub> = -24 mA	5.5 V	4.94			4.8		
	$I_{OH} = -75 \text{ mA}^{\dagger}$	5.5 V				3.85		
		4.5 V			0.1		0.1	
	I <sub>OL</sub> = 50 μA	5.5 V			0.1		0.1	
VOL		4.5 V			0.36		0.44	V
	$I_{OL} = 24 \text{ mA}$	5.5 V			0.36		0.44	
	$I_{OL} = 75 \text{ mA}^{\dagger}$	5.5 V					1.65	
l	$V_{I} = V_{CC} \text{ or } GND$	5.5 V			±0.1		±1	μA
IOZ	$V_{O} = V_{CC}$ or GND	5.5 V			±0.5		±5	μA
ICC	$V_{I} = V_{CC} \text{ or } GND, \qquad I_{O} = 0$	5.5 V			8		80	μA
$\Delta I_{CC}^{\ddagger}$	One input at 3.4 V, Other inputs at V <sub>CC</sub> or GND	5.5 V			0.9		1	mA
Ci	$V_{I} = V_{CC}$ or GND	5 V		4				pF
Co	$V_{O} = V_{CC}$ or GND	5 V		10				pF

<sup>†</sup> Not more than one output should be tested at a time, and the duration of the test should not exceed 10 ms.

<sup>‡</sup>This is the increase in supply current for each input that is at one of the specified TTL voltage levels rather than 0 V or V<sub>CC</sub>.



# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)

	1							
DADAMETED	FROM	то	T,	<b>₄ = 25°C</b>	;			UNIT
PARAMETER	(INPUT)	PUT) (OUTPUT)		TYP	MAX	MIN	MAX	UNIT
<sup>t</sup> PLH	14 and 24	1 m / 1	5.3	8.5	10.9	5.3	11.7	
<sup>t</sup> PHL	1A and 2A	Any Y	3.6	7.7	11	3.6	11.5	ns
<sup>t</sup> PLH	10E1, 10E2, and	A	4.7	8.5	11.7	4.7	12.8	ns
<sup>t</sup> PHL	20E1, 20E2	Any Y	4.4	8.4	11.3	4.4	12.4	
<sup>t</sup> PZH	10E2 or 20E2	A	4.4	8.1	11.3	4.4	12.4	
<sup>t</sup> PZL	10E1 or 20E1	Any Y	5	9.6	13.3	5	14.9	ns
<sup>t</sup> PHZ	10E2 or 20E2	Anvill	4.2	7.4	9.3	4.2	10.2	
<sup>t</sup> PLZ	10E1 or 20E1	Any Y	5.4	7.5	9.2	5.4	9.9	ns

### switching characteristics, V<sub>CC</sub> = 5 V $\pm$ 0.25 V, T<sub>A</sub> = 25°C to 70°C (see Note 3 and Figures 1 and 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	MIN	MAX	UNIT
<sup>t</sup> PLH		Arres	6.6	10.2	
<sup>t</sup> PHL	1A and 2A	Any Y	6.6	9.8	ns
<sup>t</sup> sk(o)	1A and 2A	Any Y		1	ns

NOTE 3: All specifications are valid only for all outputs switching simultaneously and in phase.


## operating characteristics, $V_{CC}$ = 5 V, $T_A$ = 25°C

	PARAMETER	TEST CONDITIONS	TYP	UNIT	
C <sub>pd</sub>	Power dissinction conscitance per bank	Outputs enabled	Cı = 50 pF. f = 1 MHz	96	~ [
	Power dissipation capacitance per bank	Outputs disabled	$C_L = 50 \text{ pF}, \text{ f} = 1 \text{ MHz}$	12	pF



### **CDC208 DUAL 1-LINE TO 4-LINE CLOCK DRIVER** WITH 3-STATE OUTPUTS

SCAS109F - APRIL 1990 - REVISED OCTOBER 1998

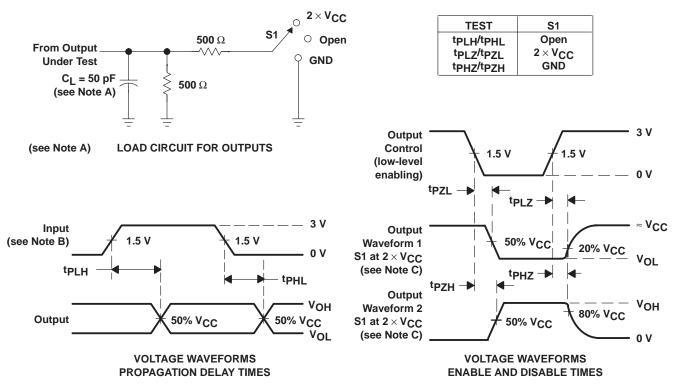

#### PARAMETER MEASUREMENT INFORMATION

NOTES: A. CL includes probe and jig capacitance.


- B. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz, Z<sub>O</sub> = 50  $\Omega$ , t<sub>f</sub>  $\leq$  3 ns, t<sub>f</sub>  $\leq$  3 ns. For testing pulse duration:  $t_r = t_f = 1$  to 3 ns. Pulse polarity can be either high-to-low-to-high or low-to-high-to-low.
- C. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.

Figure 1. Load Circuit and Voltage Waveforms



### **CDC208 DUAL 1-LINE TO 4-LINE CLOCK DRIVER** WITH 3-STATE OUTPUTS

SCAS109F - APRIL 1990 - REVISED OCTOBER 1998

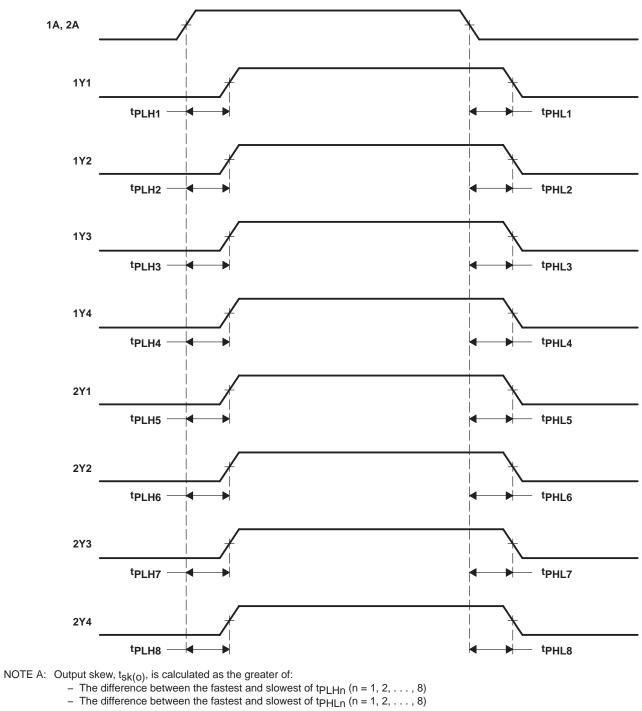

#### PARAMETER MEASUREMENT INFORMATION

Figure 2. Waveforms for Calculation of tsk(o)





#### **PACKAGING INFORMATION**

Orderable Device	Status	Package Type	Package	Pins	Package	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
	(1)		Drawing		Qty	(2)	(6)	(3)		(4/5)	
CDC208DW	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM		CDC208	Samples
CDC208DWR	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM		CDC208	Samples
CDC208DWRG4	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM		CDC208	Samples
CDC208NS	ACTIVE	SO	NS	20	40	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	CDC208	Samples
CDC208NSG4	ACTIVE	SO	NS	20	40	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	CDC208	Samples
CDC208NSR	ACTIVE	SO	NS	20	2000	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	CDC208	Samples
CDC208NSRG4	ACTIVE	SO	NS	20	2000	Green (RoHS & no Sb/Br)	NIPDAU	Level-1-260C-UNLIM	-40 to 85	CDC208	Samples

<sup>(1)</sup> The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.



### PACKAGE OPTION ADDENDUM

6-Feb-2020

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

# PACKAGE MATERIALS INFORMATION

www.ti.com

Texas Instruments

#### TAPE AND REEL INFORMATION





### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*A	I dimensions are nominal												
	Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
	CDC208DWR	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
	CDC208NSR	SO	NS	20	2000	330.0	24.4	8.4	13.0	2.5	12.0	24.0	Q1

TEXAS INSTRUMENTS

www.ti.com

# PACKAGE MATERIALS INFORMATION

6-May-2017



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
CDC208DWR	SOIC	DW	20	2000	367.0	367.0	45.0
CDC208NSR	SO	NS	20	2000	367.0	367.0	45.0

#### MECHANICAL DATA

#### PLASTIC SMALL-OUTLINE PACKAGE

#### 0,51 0,35 ⊕0,25⊛ 1,27 8 14 0,15 NOM 5,60 8,20 5,00 7,40 $\bigcirc$ Gage Plane ₽ 0,25 7 1 1,05 0,55 0-10 Δ 0,15 0,05 Seating Plane — 2,00 MAX 0,10PINS \*\* 14 16 20 24 DIM 10,50 10,50 12,90 15,30 A MAX A MIN 9,90 9,90 12,30 14,70 4040062/C 03/03

NOTES: A. All linear dimensions are in millimeters.

NS (R-PDSO-G\*\*)

**14-PINS SHOWN** 

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



# **DW0020A**



# **PACKAGE OUTLINE**

### SOIC - 2.65 mm max height

SOIC



NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M. 2. This drawing is subject to change without notice. 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
- 5. Reference JEDEC registration MS-013.



# DW0020A

# **EXAMPLE BOARD LAYOUT**

### SOIC - 2.65 mm max height

SOIC



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



# DW0020A

# **EXAMPLE STENCIL DESIGN**

### SOIC - 2.65 mm max height

SOIC



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2020, Texas Instruments Incorporated