


# **FYV0704S**


### **Features**

- Very low forward voltage drop
- High frequency properties and switching speed
- Guard ring for over-voltage protection

## **Applications**

- DC-DC converters
- Freewheeling diodes





marking



# **SCHOTTKY BARRIER RECTIFIER**

## Absolute Maximum Ratings TA=25°C unless otherwise noted

| Symbol             | Parameter  | Value       | Units |
|--------------------|--|-------------|-------|
| V <sub>RRM</sub>   | Maximum Repetitive Reverse Voltage                           | 40          | V     |
| V <sub>R</sub>     | Maximum DC Reverse Voltage                                   | 40          | V     |
| I <sub>F(AV)</sub> | Average Rectified Forward Current @ T <sub>A</sub> = 40°C    | 0.75        | А     |
| I <sub>FSM</sub>   | Non-repetitive Peak Surge Current 60Hz Single Half-Sine Wave | 8           | А     |
| T <sub>J</sub>     | Operating Junction Temperature                               | -65 to +125 | °C    |
| T <sub>STG</sub>   | Storage Temperature  | -65 to +150 | °C    |

## **Thermal Characteristics**

| Symbol          | Parameter                               | Value | Units |
|-----------------|---|-------|-------|
| $R_{\theta,JA}$ | Thermal Resistance, Junction to Ambient | 250   | °C/W  |

### **Electrical Characteristics**

| Symbol           | Parameter              |                         | Min. | Тур.  | Max. | Units |
|------------------|------------------------|-------------------------|------|-------|------|-------|
| V <sub>F</sub> * | Forward Voltage Drop   |                         |      |       |      | V     |
|                  | $I_F = 50 \text{mA}$   | T <sub>A</sub> = 25 °C  | -    | 0.270 | -    |       |
|                  | I <sub>F</sub> = 100mA | T <sub>A</sub> = 25 °C  | -    | 0.290 | -    |       |
|                  | I <sub>F</sub> = 500mA | T <sub>A</sub> = 25 °C  | -    | 0.380 | -    |       |
|                  | I <sub>F</sub> = 750mA | T <sub>A</sub> = 25 °C  | -    | 0.425 | 0.48 |       |
|                  | I <sub>F</sub> = 1A    | T <sub>A</sub> = 25 °C  | -    | 0.460 | -    |       |
|                  | I <sub>F</sub> = 1.5A  | T <sub>A</sub> = 25 °C  | -    | 0.535 | -    |       |
|                  | I <sub>F</sub> = 750mA | T <sub>A</sub> = 125 °C | -    | 0.375 | -    |       |
| I <sub>R</sub> * | Reverse Current        |                         |      |       |      | mA    |
| **               | @ rated V <sub>R</sub> | T <sub>A</sub> = 25 °C  | -    | 0.02  | 0.1  |       |
|                  |                        | T <sub>A</sub> = 125 °C | -    | 10    | -    |       |

<sup>\*</sup> Pulse Test: Pulse Width=300μs, Duty Cycle=2%

# **Typical Characteristics**




Figure 1. Typical Forward Voltage Characteristics




Figure 2. Typical Reverse Current vs. Reverse Voltage




Figure 3. Total Diode Capacitance




Figure 4. Thermal Impedance Characteristics




Figure 5. Forward Current Derating Curve






Figure 6. Non-Repetive Surge Current


©2001 Fairchild Semiconductor Corporation Rev. A, May 2001

# **Package Dimensions**

# SOT-23







Dimensions in Millimeters

#### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

| ACEx™                            | FAST <sup>®</sup>   | OPTOPLANAR™              | SuperSOT™-3           |
|----------------------------------|---------------------|--------------------------|-----------------------|
| Bottomless™                      | FASTr™              | PACMAN™                  | SuperSOT™-6           |
| CoolFET™                         | FRFET™              | $POP^{TM}$               | SuperSOT™-8           |
| CROSSVOLT™                       | GlobalOptoisolator™ | PowerTrench <sup>®</sup> | SyncFET™              |
| DenseTrench™                     | GTO™                | QFET™                    | TinyLogic™            |
| DOME™                            | HiSeC™              | QS™                      | UHC™                  |
| EcoSPARK™                        | ISOPLANAR™          | QT Optoelectronics™      | UltraFET <sup>®</sup> |
| E <sup>2</sup> CMOS <sup>™</sup> | LittleFET™          | Quiet Series™            | VCX™                  |
| EnSigna™                         | MicroFET™           | SLIENT SWITCHER®         |                       |
| FACT™                            | MICROWIRE™          | SMART START™             |                       |
| FACT Quiet Series™               | OPTOLOGIC™          | Stealth™                 |                       |

### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:


- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### PRODUCT STATUS DEFINITIONS

#### **Definition of Terms**

| Datasheet Identification | Product Status            | Definition  |
|--------------------------|---------------------------|---|
| Advance Information      | Formative or In<br>Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.  |
| Preliminary              | First Production          | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production           | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.   |
| Obsolete                 | Not In Production         | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.   |

©2001 Fairchild Semiconductor Corporation Rev. H2

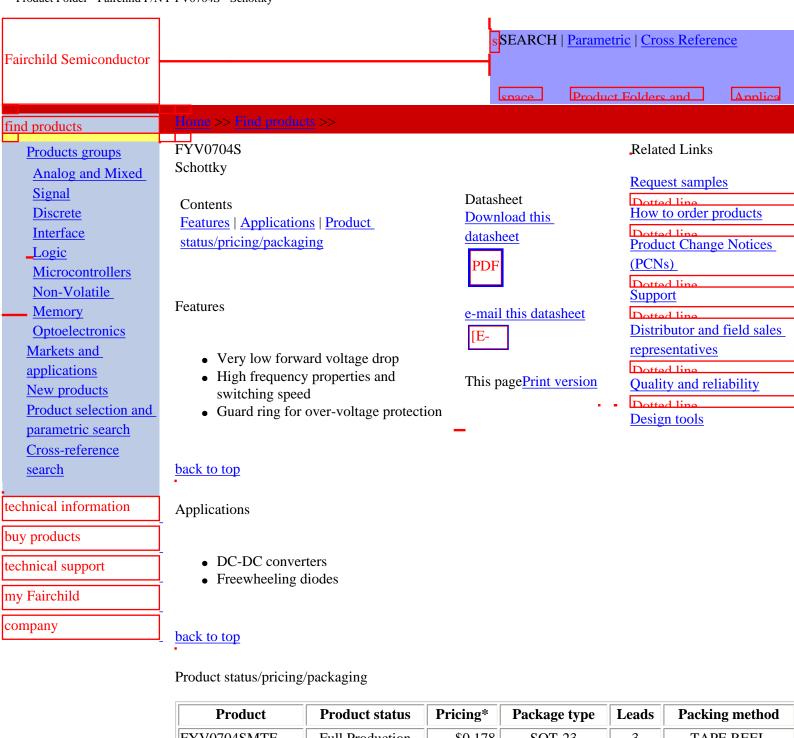

| Product     | Product status  | Pricing* | Package type | Leads | Packing method |
|-------------|-----------------|----------|--------------|-------|----------------|
| FYV0704SMTF | Full Production | \$0.178  | SOT-23       | 3     | TAPE REEL      |

<sup>\* 1,000</sup> piece Budgetary Pricing

## back to top

Home | Find products | Technical information | Buy products | Support | Company | Contact us | Site index | Privacy policy

© Copyright 2002 Fairchild Semiconductor